



# **GSM Association Roaming Database, Structure and Updating Procedures**

**Version 9.1**

**05 July 2013**

*This is a Binding Permanent Reference Document of the GSMA*

---

## **Security Classification: Non-confidential**

Access to and distribution of this document is restricted to the persons permitted by the security classification. This document is confidential to the Association and is subject to copyright protection. This document is to be used only for the purposes for which it has been supplied and information contained in it must not be disclosed or in any other way made available, in whole or in part, to persons other than those permitted under the security classification without the prior written approval of the Association.

## **Copyright Notice**

Copyright © 2013 GSM Association

## **Disclaimer**

The GSM Association ("Association") makes no representation, warranty or undertaking (express or implied) with respect to and does not accept any responsibility for, and hereby disclaims liability for the accuracy or completeness or timeliness of the information contained in this document. The information contained in this document may be subject to change without prior notice.

## **Antitrust Notice**

The information contain herein is in full compliance with the GSM Association's antitrust compliance policy.

## Table of Contents

<b>1</b>	<b>Introduction</b>	<b>4</b>
1.1	Scope of document	4
1.2	Glossary	4
<b>2</b>	<b>Structure of The Database</b>	<b>5</b>
<b>3</b>	<b>Reports</b>	<b>6</b>
<b>4</b>	<b>Procedures for updating the database</b>	<b>6</b>
<b>5</b>	<b>Annex A</b>	<b>7</b>
<b>6</b>	<b>Annex B</b>	<b>44</b>
6.1	Update schedule for the GSM Association Roaming Database	44
6.2	Update Intervals	44
6.3	Update Intervals Scheme	47
<b>7</b>	<b>Annex C</b>	<b>48</b>
7.1	RAEX IR.21 Business Requirements	48
7.2	RAEX IR.21 Exchange process and Notification functionalities	48
7.3	RAEX IR.21 exchange process	48
7.4	Details of Exchange process in manual or GUI scenarios	50
7.5	Notification functionalities	50
7.6	Company Logo	51
7.7	Access to roaming Database	51
7.8	File naming convention	51
7.9	Version Control and Change Log	51
7.10	Structure of data	52
7.11	IR.21 DATA DICTIONARY	55
7.11.1	Description	55
7.11.2	Terms legend	56
7.11.3	History of Changes	58
7.11.4	Effective date of change	59
7.11.5	Organization information	59
7.11.6	Network	60
7.11.7	Network Information	69
7.11.8	Routing Information	73
7.11.9	International SCCP GW	78
7.11.10	Domestic SCCP GW	80
7.11.11	SCCP Protocol available at PMN for connection for International SS7 Roaming Signalling	81
7.11.12	SUBSCRIBER IDENTITY AUTHENTICATION	82
7.11.13	Test Numbers Information	83
7.11.14	MAP Interworking Specifically for Roaming	85
7.11.15	MAP Optimal Routing of mobile-to-mobile calls	92
7.11.16	MAP Inter-Operator SMS Enhancement	93
7.11.17	Network Elements Information	94
7.11.18	USSD Information	100
7.11.19	CAMEL Information	101
7.11.20	Packet Data Services Information	109
7.11.21	IP-Roaming and IP-Interworking Information	120
7.11.22	MMS Interworking Information	124
7.11.23	WLAN Information	126
7.11.24	LTE ROAMING Information	128
7.11.25	Contact Information	139
7.11.26	Hosted Networks	148
<b>8</b>	<b>Release management</b>	<b>150</b>

8.1.1	RAEX IR.21 Change Management	150
8.1.2	RAEX IR.21 Version Control	150
<b>Document Management</b>		<b>151</b>

# 1 Introduction

## 1.1 Scope of document

In order to have a common and simple overview of the most important data related to International Roaming, a database for storing this data has been created, according to the [RAEX Business Requirements defined in chapter 7.1](#).

## 1.2 Glossary

Term	Meaning
APN	Access Point Name
ASN	Autonomous System Number
CAMEL	Customized Applications for Mobile networks using Enhanced Logic
CAP	CAMEL Application Part
CC	Country Code
CCITT	International Telegraph and Telephone Consultative Committee
DNS	Domain Name Service
ETS	European Telecommunications Standard
ETSI	European Telecommunications Standards Institute
GPRS	General Packet Radio Service
GSMA	GSM Association
GRX	GPRS Roaming Exchange
GSN	GPRS Support Node
GUI	Graphical User Interface
HQ	Headquarters
IMSI	International Mobile Station Identity
IP	Internet Protocol
MAP	Mobile Application Part
MCC	Mobile Country Code
MGT	Mobile Global Title
MNC	Mobile Network Code
MSC	Mobile Services Switching Centre
MSISDN	Mobile Subscriber ISDN Number
MNO	Mobile Network Operator
NC	Network Code
NDC	National Destination Code
PC	Point Code
PMN	Public Mobile Network
RAEX	Roaming Agreement EXchange

Term	Meaning
RILTE	Roaming in Long Term Evolution
SCCP	Signalling Connection Control Part
SMSC	Short Message Service Centre
SS7	Signalling System no. 7

**Table 1 Glossary**

## 2 Structure of The Database

The following information is stored in the GSM Association RAEX IR.21 Roaming Database for each MNO, (Mobile Network Operator):

- Organization Information:
  - The Organization Name
  - The Operators home country in abbreviated format
  - Information for each Network(s), Roaming Hubbing and Hosted Network belonging to the Organization including:
    - The TADIG code used by the operator according TD.13
  - Network Information
    - SE.13 Database information: the Technology and the Frequency used by the operator, Presentation of Country initials and Mobile Network Name, the abbreviated Mobile Network name, the Network Colour code and the (U) SIM header information.
- Numbering Information
  - International and Domestic SCCP GW information
  - Type of SCCP protocol available at PMN
  - Information about Subscriber Identity Authentication
  - The test number available at PMN for service testing
  - The information concerning introduction of MAP, a list of the Application Context with the current version and the time planned for changing to the next higher version
  - Addresses of network elements with Time Zone information
  - Information about USSD availability and the supported phase
  - CAMEL Application Part (CAP) version
  - Information associated with GPRS network identifiers, such as APN operator identifier, list of test APNs, Data Service supported with Class Capabilities etc.
  - Information associated with IP Roaming and IP interworking towards the GRX provider, such as DNS IP addresses/names (primary and secondary), IP address range(s), AS Number etc. of the PMN
- MMS Inter-working and WLAN Information
  - Detailed numbering information where needed
  - Information about contact persons listed by service and troubleshooting contacts
  - Information related to any type of Hosted Network, including non terrestrial and satellite. Available information are: TADIG code, Global Title Addresses, MSRN Ranges and IP Address Ranges
- Information for LTE Roaming

### 3 Reports

**NOTE:** Production of the reports have yet to be agreed with the GSM Association.

Currently, the following information is available through the GSMA Infocentre RAEX IR.21 Application, in line with requirements defined in [\[7.5 Access to Roaming Database\]](#):

- Routing Information
- Test Numbers
- Network Elements
- Packet Data

### 4 Procedures for updating the database

When data for a PMN changes, or when a new PMN is introduced, the procedures for updating the Roaming Database and for distributing the information to the other PMNs are as follows:

The PMN sends the updating information to the GSM Infocentre RAEX IR.21 Application, according to the RAEX IR.21 exchange process described in [\[7.2.1 RAEX Exchange Process\]](#).

The timescales for a PMN to send information about a change of data to the GSM Infocentre RAEX IR.21 Application are described in [\[6.2 Update Intervals\]](#).

The GSM Infocentre RAEX IR.21 Application updates the database with the information provided.

The [IR.21](#) information for each PMN is available on the GSM Association's [Infocentre](#) RAEX IR.21 Application. A nominated contact from each PMN operator can make changes to update the information on this database for their respective network only.

After a new change on the PMN information occurs all the other PMN operators will receive automatic notification that a change has been made to that operator's IR.21 information, as described in [\[7.3 Notification Functionalities\]](#).

## **5 Annex A**

Updating of the GSM Association roaming database

### **GSMA Roaming Database**

#### **IR.21 Data**

[Space blank for logo positioning, centred]

<b>Effective Date of Change:</b>	DD-MM-YYYY
----------------------------------	------------

## ORGANISATION INFORMATION

Section ID: 1 (Mandatory)

<b>Organisation Name:</b> <sup>1</sup>	<Organisation Name>
<b>Country Initials:</b>	<XXX>

## History of Changes

Date of Change	Section ID	TADIG Code	Description
YYYY-MM-DD			
YYYY-MM-DD			
YYYY-MM-DD			
YYYY-MM-DD			

<sup>1</sup> Maximum 128 chars. This field is only used for administrative purposes, however, it must always be filled in order to identify the operator.



**NETWORK**

Section ID: 2 (Mandatory, Repeating)

<b>TADIG Code:</b>	XXXYY (Fill with TADIG Code Associated to the Network. See TD.13)
<b>Network Type:</b>	Choose between "Terrestrial" or "Non-Terrestrial"
<b>Technology:<sup>2</sup></b>	<b>Frequency list:<sup>3</sup></b>
GSM	
UTRA/FDD	
UTRA/TDD	
E-UTRAN	
Other	
<b>Presentation of Country initials and Mobile Network Name:</b>	<Country Initials and Mobile Network Name>
<b>Abbreviated Mobile Network Name:</b>	<YYYYYYYY>
<b>Network Colour Code:</b>	<Z>

**NETWORK INFORMATION**

Section ID: 3 (Mandatory)

The following information refer to the network identified by TADIG Code: XXXYY

RAEX Version: YYYY

<sup>2</sup> Defines the technology of the operator, e.g. GSM, UTRAN, E-UTRAN and others like WIFI

<sup>3</sup> Defines the frequency of the operator, e.g. GSM900, GSM1800, GSM1900, GSM900/1800, 3GSM, LTE 800, LTE 1800, LTE 2600

**ROUTING INFORMATION**

TADIG Code: XXXYY

Section ID: 4 (Mandatory)

ITU-T E.164 Number series	Country Code (CC)	National Destination Code (NDC)	SN Range Start	SN Range Stop	Primary International DPC <sup>4</sup>	Secondary International DPC <sup>5</sup>
<b>MSISDN Number Range(s):</b>						
<b>Network Nodes Global Title Number Range(s):</b>						
<b>MSRN Number Range(s):</b>						

<sup>4</sup> Primary Destination Point Code parameters mandatory for signalling routing configuration. This field must be filled if SCCP routing differentiation is applied to group of E.164 number series, by using one of the DPC values defined in section "International SCCP GW"

<sup>5</sup> Secondary Destination Point Code parameters mandatory for signalling routing configuration. This field must be filled if SCCP routing differentiation is applied to group of E.164 number series, by using one of the DPC values defined in section "International SCCP GW"

<b>E. 212 Number series:</b>	<b>Mobile Country Code (MCC)</b>	<b>Mobile Network Code (MNC)</b>

<b>E. 214 Mobile Global Title (MGT)</b>	<b>Country Code of MGT (CC)<sup>6</sup></b>	<b>Network Code of MGT (NC)</b>

<b>Does Number Portability apply?</b>	
---------------------------------------	--

<b>List of E.164 Number Ranges due to Number Portability</b>	<b>CC</b>	<b>NDC</b>	<b>SN Range Start</b>	<b>SN Range Stop</b>

<b>(U) Sim Header:</b>	
------------------------	--

<b>Additional Information:</b>	
--------------------------------	--

<b>Short number translation information</b>	<b>Short number</b>	<b>Long number<sup>7</sup></b>	<b>Service name<sup>8</sup></b>

<sup>6</sup> identical to the E.164 Country Code. Additional information due to Number Portability is included in the "Number Information" field of the "Miscellaneous Information" table

<sup>7</sup> translated short number in international format without international call prefix (+, 00, 011,...)

<sup>8</sup> service name. For instance: customer care, voice mail.

## INTERNATIONAL SCCP GATEWAY

TADIG Code: XXXYY

Section ID: 5 (Conditional)

### Section Not Applicable

Or

**Section is also applicable for the following TADIG codes<sup>9</sup>**

### International SCCP Carrier List

#### SCCP Carrier Info

<b>SCCP carrier Name:</b>	
<b>Connectivity Information<sup>10</sup></b>	
<b>Comments<sup>11</sup></b>	

#### MNO Tadig Code List<sup>12</sup>

TADIG code1	TADIG code 2	TADIG code 3	TADIG code 4	TADIG code 5	TADIG code 6
TADIG code7	TADIG code 8	TADIG code 9	TADIG code 10	TADIG code 11	TADIG code 12

#### DPC List

#### DPC Info

<b>Signature:</b>	
<b>Type:</b>	
<b>International DPC:</b>	
<b>Comments:<sup>13</sup></b>	

<sup>9</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>10</sup> Define the preferred type of connectivity:Primary, Secondary,Backup

<sup>11</sup> To provide more information in case i.e. of regional routing

<sup>12</sup> To list the TADIG codes of the roaming partners that shall use the SCCP carrier to exchange the traffic with the operator

<sup>13</sup> To provide more information about the specific DPC used (i.e. primary, secondary)

## DOMESTIC SCCP GATEWAY

TADIG Code: XXXYY

Section ID: 6 (Optional)

### Section Not Applicable

Or

Section is also applicable for the following TADIG codes<sup>14</sup>

---

---

### Domestic SCCP Carrier List

#### SCCP Carrier Info

SCCP carrier Name:	
DPC List	
DPC Info	
Signature: <sup>15</sup>	
Type: <sup>16</sup>	
Domestic DPC:	
Comments: <sup>17</sup>	

## SCCP PROTOCOL AVAILABLE AT PMN FOR CONNECTION FOR INTERNATIONAL SS7 ROAMING

TADIG Code: XXXYY

Section ID: 7 (Optional)

### Section Not Applicable

Or

Section is also applicable for the following TADIG codes<sup>18</sup>

---

---

<sup>14</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>15</sup> Maximum 20 letters. This field is only needed for information and may be omitted.

<sup>16</sup> ISC, MSC, Stand-alone SCCP etc. Maximum 20 letters. This field is only needed for information and may be omitted

<sup>17</sup> To provide more information about the specific DPC used (i.e. primary, secondary)

<sup>18</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

SCCP Protocol available at PMN	Availability (Yes/No)
ETSI (ITU):	
ANSI:	

**SUBSCRIBER IDENTITY AUTHENTICATION**

TADIG Code: XXXYY

Section ID: 8 (Conditional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>19</sup>**

Authentications	Performed (Yes/No)
Authentication performed for Roaming subscribers at the commencement of GSM service <sup>20</sup>	

<sup>19</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>20</sup> Write YES if authentication is performed as described within the current version of SG.15 under section Subscriber Identity Authentication/ Roamed Subscriber. Otherwise write NO

SG.15 v 3.0.0 says in section 2.2 Roamed Subscribers:

For roamed subscribers (at the commencement of GSM service) authentication is to be performed at every occasion of:-

- a) Network access using IMSI
- b) Location updating involving VLR change
- c) Network access for at least 1 in x mobile originated and terminated call set-ups (incl. SMS). The value of x will be defined in the roaming agreements and should be less than 10
- d) Supplementary service operation outside call
- e) Cipher key sequence number mismatch

If GPRS is supported, authentication is also to be performed at every occasion of:-

- a) GPRS attach

<b>Authentication performed for roaming subscribers in case of GPRS<sup>21</sup></b>	
<b>A5 Cipher Algorithm version in use</b>	

**Test Numbers Information**

TADIG Code: XXXYY

Section ID: 9 (Optional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>22</sup>**

---



---

Number Type	Test Number	Location	Comments

- b) routing area updating involving SGSN change
- c) PDP context activation
- d) P-TMSI signature mismatch, if P-TMSI signature is used
- e) P-TMSI signature not inserted in a Attach Request or Routing Area Update Request

21 Write YES if authentication is performed as described within the current version of SG.15 under section Subscriber Identity Authentication/ Roamed Subscriber if GPRS is supported. Otherwise write NO. If GPRS is not supported fill in N/A

22 Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

**MOBILE APPLICATION PART (MAP)**

TADIG Code: XXXYY

Section ID: 10

(Conditional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>23</sup>**

---



---

**Interworking Specifically for Roaming**

Application Context Name	Current Version in			Comment
	Inbound Roaming		Outbound Roaming <sup>24</sup>	
	MSC/VLR	SGSN		
networkLocUp		N/A		
roamingNumberEnquiry		N/A		
InfoRetrieval				
subscriberDataMng				
networkFunctionalSs		N/A		
mwdMngt				
shortMsgMT-Relay (shortMsgRelay in v1)				
shortMsgMO-Relay (shortMsgRelay in v1)				
ss-InvocationNotification		N/A		
subscriberInfoEnquiry				
gprsLocationUpdate	N/A			
locationCancellation				
msPurging				
reset				

<sup>23</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>24</sup> The term "Outbound Roaming" denotes any one of the following nodes that is located in the home PLMN only: HLR, gsmSCF, SMS-IWMSC, SMS-GMSC.



networkUnstructuredSs		N/A		
Reporting		N/A		
callCompletion		N/A		
istAlerting		N/A		
serviceTermination		N/A		
locationSvcGateway	N/A	N/A		
mm-EventReporting		N/A		
authenticationFailureReport				
imsiRetrieval		N/A		
gprsNotifyContext	N/A			
gprsLocationInfoRetrieval	N/A			
failureReport	N/A			
secureTransportHandling				

**MAP OPTIMAL ROUTING SECTION**

TADIG Code: XXXYY

Section ID: 11 (Optional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>25</sup>**

---



---

**MAP Optimal Routing of mobile-to-mobile calls**

Application Context Name	Current Version in			Comment
	(V)MSC <sup>26</sup>	GMSC	HLR	
CallControlTransfer			N/A	

<sup>25</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>26</sup> The MSC is acting as a VMSC for a roaming subscriber for ORLCF; see sub-clause 4.2 of 3GPP TS 23.079 for more information.

LocationInfoRetrieval <sup>27</sup>	N/A			
-------------------------------------	-----	--	--	--

## MAP INTER OPERATOR SMS ENHANCEMENT

TADIG Code: XXXYY

Section ID: 12 (Optional)

### Section Not Applicable

Or

**Section is also applicable for the following TADIG codes<sup>28</sup>**

Inter-Operator SMS Enhancement				
Application Context Name	Current Version in			Comment
	SMS-IWMSC	SMS-GMSC	HLR	
shortMsgGateway	N/A			
shortMsgAlert		N/A		

<sup>27</sup> The "locationInfoRetrieval" application context is only valid for inter-PMN signalling in Optimal Routing of mobile-to-mobile calls; otherwise it is only intra-PMN. Note that the dialogue initiator is a GMSC which is integrated with the calling subscriber's MSC/VLR (and obviously the dialogue responder is the called subscriber's HLR, which is in the called subscriber's HPMN).

<sup>28</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO



**USSD INFORMATION**

TADIG Code: XXXYY

Section ID: 14 (Optional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>32</sup>**

---



---

<b>USSD capability available?<sup>33</sup></b>	
<b>Supported phase:<sup>34</sup></b>	

**CAMEL INFO**

TADIG Code: XXXYY

Section ID: 15 (Optional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>35</sup>**

---



---

**gsmSSF/MSC**

<b>CAP Version supported<sup>36</sup> Inbound</b>	<b>Planned Version</b>	<b>Planned Date:</b>

<sup>32</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>33</sup> Yes means USSD capability is supported including all of case a), section 5.1.2, 3GPP TS 22.090 / GSM 02.90.

<sup>34</sup> The field is mandatory, where USSD capability is available.

Phase 1 only support mobile initiated operation (pull operation)

Phase 2 support for network initiated operation (pull and push operation).

<sup>35</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>36</sup> For information: some operators may restrict the use of CAMEL on specific PMNs.

<b>CAP Version supported<sup>37</sup> Outbound</b>	<b>Planned Version</b>	<b>Planned Date:</b>

**CAMEL Functionality Information**

Service name	SK	CAP Version	SCP GT Address(es)

**CAMEL re-Routing Numbering Information**

List of numbers used for re-routing purposes <sup>38</sup>	

**CAPv4 Partial Implementations<sup>39</sup>**

**CAMEL Phase 4 CSIs:**

	Supported (Yes/No)	Planned Date:
<b>O-CSI</b>		
<b>D-CSI</b>		
<b>VT-CSI</b>		
<b>MT-SMS-CSI</b>		
<b>Functionalities:</b>	<b>Supported (Yes/No)</b>	<b>Planned Date:</b>
<b>Initiate Call Attempt</b>		
<b>Split Leg</b>		
<b>Move Leg</b>		
<b>Disconnect Leg</b>		
<b>Entity Released</b>		
<b>DFC With Argument</b>		

<sup>37</sup> For information: some operators may restrict the use of CAMEL on specific PMNs.

<sup>38</sup> To provide information of Re Routing CAMEL number for troubleshooting

<sup>39</sup> To be completed only if CAP version 4 is supported.

**CAPv4 Partial Implementations<sup>39</sup>**

<b>CAMEL Phase 4 CSIs:</b>	<b>Supported (Yes/No)</b>	<b>Planned Date:</b>
Play Tone		
DTMF Mid Call		
Charging Indicator		
Alerting DP		
Location At Alerting		
Change Of Position DP		
OR Interactions		
Warning Tone Enhancements		
CF Enhancements		

<b>gsmSSF/SGSN</b>		
<b>CAP Version supported<sup>40</sup></b>	<b>Planned Version:</b>	<b>Planned Date:</b>

**CAPv4 Partial Implementations<sup>41</sup>**

<b>CAMEL Phase 4 CSIs:</b>	<b>Supported (Yes/No)</b>	<b>Planned Date:</b>
MT-SMS-CSI		
MG-CSI		
PSI Enhancements		

40 For information: some operators may restrict the use of CAMEL on specific PMNs

41 To be completed only if CAP version 4 is supported.

**PACKET DATA SERVICES INFORMATION**

TADIG Code: XXXYY

Section ID: 16 (Optional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>42</sup>**

---



---

**List of APN Operator Identifiers**

APN Operator Identifier <sup>43</sup>

*List of APNs available for testing and troubleshooting*

---

**APN WEB List**

APN Credential			ISP DNS IP address (primary)	ISP DNS IP address (secondary)
APN	Username	Password		

**APN WAP List**

APN Credential			WAP Gateway IP Address	WAP Server URL	WAP Port
APN	Username	Password			

<sup>42</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>43</sup> APN Operator Identifier used for GGSN resolution. The last three labels of the APN Operator Identifier must be in the form: MNC.MCC.GPRS

<b>APN MMS List</b>				
<b>APN Credential</b>			<b>WAP Gateway IP address for MMS</b>	<b>Messaging Server URL</b>
<b>APN</b>	<b>Username</b>	<b>Password</b>		

<b>APN M2M List</b>				
<b>APN Credential</b>			<b>ISP DNS IP address (primary)</b>	<b>ISP DNS IP address (secondary)</b>
<b>APN</b>	<b>Username</b>	<b>Password</b>		

<b>GTP Version<sup>44</sup></b>	
<b>SGSN:</b>	
<b>GGSN:</b>	

**List of Data Services supported**

<b>Data Service</b>	<b>Multislot Class Capability<sup>45</sup></b>

<b>Multiple PDP Context Support<sup>46</sup></b>	
<b>Supported or Not Supported</b>	
<b>Number of simultaneous Primary PDP context</b>	

<sup>44</sup> The highest GTP version which operators support. (e.g.: R97 and R98: ver.0, R99 and after R99 : ver.1)

It is recommend that GTPver1 be supported from 00:00:00 1st January 2005, otherwise while GTPver0 only is supported by a network that network should apply the configuration defined in IR.34.

<sup>45</sup> Maximum Multislot class capability available

<sup>46</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network



IPv6 Connectivity Information		Supported (Yes/No)
SGSN	IPv6 PDP Type	[Yes/No]
	IPv4v6 PDP Type	[Yes/No]
GGSN	IPv6 PDP Type	[Yes/No]
	IPv4v6 PDP Type	[Yes/No]

List of 2G/3G QOS profiles				
Profile name				
Traffic Class <sup>47</sup>				
ARP <sup>48</sup>				
evolvedARP <sup>49</sup>				
Maximum Bit Rate Uplink <sup>50</sup>				
Maximum Bit Rate Downlink <sup>51</sup>				
Delivery order <sup>52</sup>				
Maximum SDU size <sup>53</sup>				
SDU format information <sup>54</sup>				
SDU error ratio <sup>55</sup>				
Residual BER <sup>5</sup>				
Delivery of				

47 Mandatory

48 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

49 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

50 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

51 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

52 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

53 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

54 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

55 If Yes please indicate how many simultaneous Primary PDP context are supported by the network

<b>erroneous SDUs<sup>56</sup></b>				
<b>Guaranteed bit rate uplink<sup>57</sup></b>				
<b>Guaranteed bit rate downlink<sup>58</sup></b>				
<b>Traffic handling priority<sup>59</sup></b>				
<b>Source statistics descriptor<sup>60</sup></b>				
<b>Signalling indication<sup>61</sup></b>				

<sup>56</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network

<sup>57</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network

<sup>58</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network

<sup>59</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network

<sup>60</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network

<sup>61</sup> If Yes please indicate how many simultaneous Primary PDP context are supported by the network

**IP - ROAMING AND IP - INTERWORKING INFORMATION**

TADIG Code: XXXYY

Section ID: 17(Optional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>62</sup>**

---



---

List of All IP address ranges used by PMN for connection to Inter-PMN IP backbone <sup>63</sup>	IP Address Range

Any <i>additional</i> MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the Routing Area Identity (RAI) in GTP messaging from SGSNs <sup>64</sup>	MCC (3 digit)	MNC (2 or 3 digit)

<sup>62</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>63</sup> IP addresses or IP address range(s) of all operator's nodes that connect to the inter-PMN IP backbone network known as the "GRX" e.g. GGSNs, SGSNs, MMSCs, AAA Servers/Proxies, DNS Servers etc. This information is used for firewall and Border Gateway configuration (see PRD IR.34).

<sup>64</sup> Provide the details of any MNC/MCC that is different to the E.212 field (located at the top of the IR.21 form) that can be sent from any SGSN in the VPMN to the GGSN in the HPMN, in the Create PDP Context Request and Update PDP Context Request GTP messages. If only the MNC/MCC as stated in the E.212 field is sent to the HPMN, this table should be left blank.

<b>List of Autonomous System Numbers</b>	<b>ASN<sup>65</sup></b>

<b>Any <i>additional</i> MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the User Location Information (ULI) in GTP messaging from SGSNs<sup>66</sup></b>	<b>MCC (3 digit)</b>	<b>MNC (2 or 3 digit)</b>

<b>List of PMN authoritative DNS server IP addresses and names<sup>67</sup></b>	<b>IP address</b>	<b>DNS Name</b>

<b>List of PMN local caching DNS server IP addresses and names<sup>68</sup></b>	<b>IP address</b>	<b>DNS Name</b>

<sup>65</sup> The Autonomous System Number (ASN) is a 16 or 32 bit integer that every PMN must assign to their IP network that is seen as one Autonomous System (AS). The ASN enables the exchange of exterior routing information between neighbouring Autonomous Systems. According to RFC4893, 4-Byte AS Numbers refers to ASN in the range 0.0 – 65535.65535..

<sup>66</sup> Provide the details of any MNC/MCC that is different to the E.212 field (located at the top of the IR.21 form) that can be sent from any SGSN in the VPMN to the GGSN in the HPMN, in the Create PDP Context Request and Update PDP Context Request GTP messages. If only the MNC/MCC as stated in the E.212 field is sent to the HPMN, this table should be left blank.

<sup>67</sup> IP address(es) and name(s) of DNS server(s) that are authoritative DNS server(s) i.e. DNS servers that answer DNS requests/queries from local caching DNS servers. Note that DNS hostname(s) given in this field should match the actual name(s) configured in the operator DNS server(s) (this is to avoid conflict with the NS records in the Root DNS and operator DNS servers).

<sup>68</sup> IP address(es) and name(s) of DNS server(s) that are local caching DNS server(s) i.e. DNS server(s) that send DNS requests/queries in order to resolve domain names on behalf of e.g. SGSN, MMSC etc. Note that DNS hostname(s) given in this field should match the actual name(s) configured in the operator DNS server(s) (this is to avoid conflict with the NS records in the Root DNS and operator DNS servers).

<b><i>IP address that responds to ping/traceroute.<sup>69</sup></i></b>	
---	--

<b>List of GRX Providers</b>	<b>GRX Provider</b>

<sup>69</sup> Pingable and traceroutable IP address of a node within the operator's AS. Maximum size for ping is 64 bytes. Minimum time interval for pinging is 1 hour.

### MMS INTERWORKING INFORMATION

TADIG Code: XXXYY

Section ID: 18 (Optional)

**Section Not Applicable**

Or

Section is also applicable for the following TADIG codes<sup>70</sup>

---



---

**MMS Element Data**

Domain name of MMSC	IP Address Range for MMSC <sup>71</sup>	Max. size of MMS allowed	Delivery Report allowed? (Yes/No)	Read Report allowed? (Yes/No)	IP address(es) of Incoming MTA	IP address(es) of Outgoing MTA
List of MMS IW Hub Provider		MMS IW Hub Provider Name			MMS IW Hub Provider GT Address	

**MMS Element Data**

Domain name of MMSC	IP Address Range for MMSC	Max. size of MMS allowed	Delivery Report allowed? (Yes/No)	Read Report allowed? (Yes/No)	IP address(es) of Incoming MTA	IP address(es) of Outgoing MTA

<sup>70</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>71</sup> IP addresses or IP address range(s) of MMSC that give onto the inter-PMN backbone. This information is used for firewall and Border Gateway configuration

List of MMS IW Hub Provider	MMS IW Hub Provider Name	MMS IW Hub Provider GT Address

**WLAN INFORMATION**

TADIG Code: XXXYY

Section ID: 19 (Optional)

Section Not Applicable

Or

Section is also applicable for the following TADIG codes<sup>72</sup>

---



---

List of RADIUS server/ RADIUS proxy IP address(es)	IP Address

List of IP address range(s) used for WLAN roaming <sup>73</sup>	IP Address Range

List of WLAN Service Brand <sup>74</sup>	Brand Name	Realm

<sup>72</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>73</sup> "Subnet IP address range(s) in the form of x.x.x.x/n to which the RADIUS server/proxy IP address also belongs".

<sup>74</sup> Brand name of the Home WO WLAN service seen by the end user in the web based login page. The brand name can be used to mask the realm from the end user in web based login pages e.g. by utilizing a dropdown box into realm known by the network. This enables an operator to change its roaming realm with reduced impact to the user experience. If the operator has multiple roaming realms they have to be mapped one-to-one to brand names.

## LTE ROAMING INFORMATION

TADIG Code: XXXYY

Section ID: 20 (Optional)

### Section Not Applicable

Or

**Section is also applicable for the following TADIG codes<sup>75</sup>**

---



---

### Roaming Interconnection

#### *Diameter:*

<b>IP addresses of the Diameter Edge Agent<sup>76</sup></b>	[List/Range/Subnetmask of IP addresses]

#### *S6a:<sup>77</sup>*

<b>Is S6a supported without IWF?</b>	[Yes/No]
<b>Hostnames for HSS, MME in the form which they are used in the Diameter-Origin and Diameter-Destination, Host and Realm AVPs</b>	
<b>Is IWF available to allow support of inter-PMN MAP interface for connection towards HSS?</b>	[Yes/No]
<b>Is IWF available to allow support of inter-PMN MAP interface for connection towards MME?</b>	[Yes/No]

#### *S6d:*

<b>Is S6d used for legacy SGSN?</b>	[Yes/No]
-------------------------------------	----------

<sup>75</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>76</sup> GSMA PRD IR.88 specifies 6 deployment examples for Diameter Edge Agent. This entry shows Edge Agent IP addresses if deployment example 1-4 is used, and shows Diameter Agent outsourced to IPX for deployment example 5 and 6.

<sup>77</sup> Support of S6a (with or without IWF) is a requirement for full LTE roaming



<b>S9:</b>	
Is S9 used?	[Yes/No]

<b>S8:</b>	
Is GTP Interface available?	[Yes/No]
Is PMIP Interface available?	[Yes/No]

<b>SMS ITW</b>	
<b>SMS Delivery mechanism</b>	
SMS over IP	[Yes/No]
SMS over SGs	[Yes/No]

<b>Voice ITW</b>	
IMS/CSFB/other	

<b>Roaming Retry<sup>78</sup></b>	
Is Roaming Retry supported?	[Yes/No]

<b>Home PMN Information For LTE Roaming Agreement Only</b>	
Is LTE-only roaming supported?	[Yes/No]

<b>Visited PMN Information For LTE Roaming Agreement Only</b>	
Is LTE-only roaming supported?	[Yes/No]

<b>Home PMN Information For 2G/3G Roaming Agreement Only (See footnote<sup>79</sup> for scenario 1, and footnote<sup>80</sup> for other scenarios)</b>	
Scenario 2 supported?	[Yes/No]
Scenario 3 supported?	[Yes/No]

<sup>78</sup> Roaming Retry is optional for CSFB, as defined in 3GPP TS 23.272 and described in GSMA PRD IR.88

<sup>79</sup> Scenario 1 is same as legacy GPRS roaming.

<sup>80</sup> Scenario 2 and 3 are described in GSMA PRD IR.88 Section 4.2.2.1 "2G/3G Roaming Agreement Only"

**Visited PMN Information For 2G/3G Roaming Agreement Only (See footnotes for Home PMN entry for the details of scenarios)**

<b>Scenario 2 supported?</b>	[Yes/No]
<b>Scenario 3 supported?</b>	[Yes/No]

**Home PMN Information For 2G/3G and LTE Roaming Agreement (See footnote<sup>81</sup> for scenarios)**

<b>Scenario 1 supported?</b>	[Yes/No]
<b>Scenario 2 supported?</b>	[Yes/No]
<b>Scenario 3 supported?</b>	[Yes/No]
<b>Scenario 4 supported?</b>	[Yes/No]

**Visited PMN Information For 2G/3G and LTE Roaming Agreement (See footnote<sup>82</sup> for scenarios)**

<b>Scenario 1 supported?</b>	[Yes/No]
<b>Scenario 2 supported?</b>	[Yes/No]
<b>Scenario 3 supported?</b>	[Yes/No]
<b>Scenario 4 supported?</b>	[Yes/No]

**List of LTE QOS profiles**

Profile name				
<b>QCI<sup>83</sup></b>				
<b>ARP<sup>84</sup></b>				
<b>Pre-emption vulnerability<sup>85</sup></b>				
<b>Pre-emption capability<sup>86</sup></b>				
<b>Maximum Bit Rate</b>				

81 All Scenarios are described in GSMA PRD IR.88 Section 4.2.2.2"4.2.2.2 2G/3G and LTE Roaming Agreement"

82 All Scenarios are described in GSMA PRD IR.88 Section 4.2.2.2"4.2.2.2 2G/3G and LTE Roaming Agreement"

83 Mandatory

84 Mandatory

85 Mandatoy for Guaranteed Bit Rate EPS bearers. Not applicable for non-GBR ones

86 Mandatoy for Guaranteed Bit Rate EPS bearers. Not applicable for non-GBR ones

<b>Uplink<sup>87</sup></b>				
<b>Maximum Bit Rate Downlink<sup>88</sup></b>				
<b>Guaranteed bit rate uplink<sup>89</sup></b>				
<b>Guaranteed bit rate downlink<sup>90</sup></b>				

IPv6 Connectivity Information		Supported (Yes/No)
<b>MME</b>	<b>IPv6 PDN Type</b>	[Yes/No]
	<b>IPv4v6 PDN Type</b>	[Yes/No]
<b>SGW</b>	<b>IPv6 PDN Type</b>	[Yes/No]
	<b>IPv4v6 PDN Type</b>	[Yes/No]
<b>PGW</b>	<b>IPv6 PDN Type</b>	[Yes/No]
	<b>IPv4v6 PDN Type</b>	[Yes/No]

Information for DIAMETER certificates exchange	
IP Addresses of IPsec GW	
<b>IP Address of the first IPsec GW</b>	[List/Range/Subnetmask of IP addresses]
<b>IP address of the second IPsec GW<sup>91</sup>:</b>	[List/Range/Subnetmask of IP addresses]
<b>Certificates available from the RAEX IR.21 Database<sup>92 93</sup></b>	
<b>Certificate of first IPsec GW:</b>	[Yes/No]
<b>Certificate of second IPsec GW:</b>	[Yes/No]
<b>Operator roaming sub-CA</b>	[Yes/No]

87 Mandatoy for Guarantied Bit Rate EPS bearers. Not applicable for non-GBR ones

88 Mandatoy for Guarantied Bit Rate EPS bearers. Not applicable for non-GBR ones

89 Mandatoy for Guarantied Bit Rate EPS bearers. Not applicable for non-GBR ones

90 Mandatoy for Guarantied Bit Rate EPS bearers. Not applicable for non-GBR ones

91 Optional information

92 File to be downloaded in PEM format (typical size: 1 to 4 Kb) from the RAEX IR.21 application

93 Optional

---

<b>certificate<sup>94</sup>:</b>	
----------------------------------	--

---

---

<sup>94</sup> a certificate signing only the sub-set of the operator network which is accessible by the roaming partner

**CONTACT INFORMATION**

TADIG Code: XXXYY

Section ID: 21 (Conditional)

**Section Not Applicable**

Or

**Section is also applicable for the following TADIG codes<sup>95</sup>**

**List of Roaming Troubleshooting Contact Information**

**Troubleshooting Office Information Item**

<b>Location</b>				
<b>Office Time Zone in UTC<sup>96</sup></b>				
<b>Office Hours</b>	<b>Week Day(s)</b>	<b>Start Time</b>	<b>End Time</b>	
	Mon, Tue, Wed			
	Thu, Fri			
<b>Main Contact for Troubleshooting</b>  (Office Hours)	<b>Team Name</b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>
<b>Escalation Contact for Troubleshooting</b>	<b>Person Name</b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>
<b>24 x 7 Troubleshooting Contact (Out of Office Hours)</b>	<b>Team Name</b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>

**Troubleshooting Office Information Item**

<b>Location</b>			
<b>Office Time Zone in UTC</b>			
<b>Office Hours<sup>97</sup></b>	<b>Week Day(s)</b>	<b>Start Time</b>	<b>End Time</b>

<sup>95</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

<sup>96</sup> Office Time zone relative to GMT/UTC (± hrs).

<b>Main Contact for Troubleshooting (Office Hours)</b>	<b>Team Name</b>	<b>Tel.</b>	<b>Fax</b>	<b>Email<sup>98</sup></b>

<b>Escalation Contact for Troubleshooting</b>	<b>Person Name<sup>99</sup></b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>

<b>24 x 7 Troubleshooting Contact (Out of Office Hours)</b>	<b>Team Name<sup>100</sup></b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>

**Additional Contacts**

<b>SCCP Inquiries and ordering of SS7 Routes</b>	<b>Person Name</b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>

<b>Roaming Coordinator</b>	<b>Person Name</b>	<b>Tel.</b>	<b>Fax</b>	<b>Email</b>

<sup>97</sup> Normal office hours e.g. Mon-Sat 08:00 to 17:00.

<sup>98</sup> Generic e-mail addresses are recommended, e.g. roamingsupport@operator.com

<sup>99</sup> Contact for escalating roaming faults as per PRD IR.78.

<sup>100</sup> Contact for roaming troubleshooting out of office hours. Can be the same as Main Contact for Troubleshooting.

IREG Tests	Person Name	Tel.	Fax	Email

TADIG Tests	Person Name	Tel.	Fax	Email

CAMEL Tests	Person Name	Tel.	Fax	Email

GPRS Contact	Person Name	Tel.	Fax	Email

Contact Person(s) (in PMN) for GRX connectivity	Person Name	Tel.	Fax	Email


Contact person (in PMN) to verify authority of a GRX provider to add/modify data in Root DNS	Person Name	Tel.	Fax	Email

Contact person(s) for IW MMS	Person Name	Tel.	Fax	Email

Contact person(s) for IW SMS	Person Name	Tel.	Fax	Email

Contact person(s) for WLAN	Person Name	Tel.	Fax	Email

---

**Other Contacts**

---



Job Title	Person Name	Tel.	Fax	Email		

IR21 Distribution Email Address	Email

## HOSTED NETWORKS

TADIG Code: XXXYY

Section ID: 22 (Optional, Repeating)

### Section Not Applicable

Or

Section is also applicable for the following TADIG codes<sup>101</sup>

---



---

### List of Hosted Network Data

#### Hosted Network Data

<b>Network Name:</b>	
<b>Country:</b>	
<b>TADIG Code</b>	
<b>Network Type</b>	<i>Choose between "Terrestrial" or "Non-Terrestrial"</i>

#### List of Hosted Network Nodes

Node Type	GT (E.164) Address(es)	IP Address(es)	MSRN Range(s)			
			CC	NDC	SN Range Start	SN Range End

### Hosted Network Data

#### Network Name:

<b>Network Name:</b>	
<b>Country:</b>	
<b>TADIG Code</b>	
<b>Network Type</b>	<i>Choose between "Terrestrial" or "Non-Terrestrial"</i>

#### List of Hosted Network Nodes

Node Type	GT (E.164) Address(es)	IP Address(es)	MSRN Range(s)			
			CC	NDC	SN Range	SN Range End

<sup>101</sup> Fill-in that section if the information is also applicable with other networks of your organization or for MVNO

					<b>Start</b>	

## 6 Annex B

### 6.1 Update schedule for the GSM Association Roaming Database

General updating procedures for information in the Roaming Database are described in [section 4](#) of this document. The following schedule shall detail these procedures with regard to the single parts of information.

The various fields contained in the database are of different importance to the operation of the GSM networks. Therefore, the time schedule of sending the information about a change of data to the GSMA Infocentre RAEX IR.21 Application and the delay until this information is distributed to the other GSM Association members may depend upon the single case.

Details of any changes will be sent via email according notification functionalities.

### 6.2 Update Intervals

The intervals for updating of information shall be as follows:

#### 1. Name of Operator/Operator's Home Country (abbreviated):

Impact:

- Changes to a name of the operator are only critical to the administrative parts of GSM relationships. New operators joining the GSM Association should be introduced as soon as possible.

Update to GSMA Infocentre RAEX IR.21 Application:

- As soon as possible with date when the change will be valid or the new member will start service

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- With next full update (if before date of change), otherwise at least two weeks before change.

#### 2. E.164 CC+NDC of the MSISDN:

Impact:

- Critical information for the operation of International Roaming connections. New or changed data have to be implemented in the switches.

Update to GSMA Infocentre RAEX IR.21 Application:

- 3 months before change takes place.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- Within one week.

#### 3. E.212 MCC+MNC of the IMSI:

Impact/Update to GSMA Infocentre RAEX IR.21 Application/Distribution to GSM Association members:

- Similar to item 2.

#### 4. E.214 CC+NC of the Mobile Global Title (MGT):

Impact/Update to GSMA Infocentre RAEX IR.21 Application/Distribution to GSM Association members:

- Similar to item 2.

5. International SPC of the International Gateway SCCP Node(s) connected:

Impact:

- Critical if one or both GSM networks have gateways with ISPC and direct access to the international SS7 network. Otherwise in the responsibility of the international fixed network operators.

Update to GSMA Infocentre RAEX IR.21 Application:

- Three months before change takes place.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- Within one week.

6. Signature of the International Gateway SCCP Node(s) connected:

Impact:

- Only for administrative reasons.

Update to GSMA Infocentre RAEX IR.21 Application:

- As soon as possible with date when the change will be valid.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- With next full update (if before date of change), otherwise at least two weeks before change.

7. Exchange Type of the International Gateway SCCP Node(s) connected:

Impact/Update to GSMA Infocentre RAEX IR.21 Application/Distribution to GSM Association members:

- Similar to item 6.

8. Initial/Subsequent Access Solution(s) to the International SS7 Network:

Impact:

- For information only. Details exchanged under items 5,6,7.

Update to GSMA Infocentre RAEX IR.21 Application:

- As soon as possible with date when the change will take place.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- With next full update (if before date of change), otherwise at least two weeks before change.

9. (GPRS information) IP based services information:

Impact:

- Critical information for the operation of International Roaming connections. New or changed data to be implemented on the PMN operator's GPRS network or the GPRS root DNS server where relevant.

Update to GSMA Infocentre RAEX IR.21 Application:

- It is recommended to inform the affected operators two months before change, but at least one month before.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- Within one week.

10. Date of Introduction of White Book SCCP:

Impact:

- Critical to operation with regard to compatibility aspects.

Update to GSMA Infocentre RAEX IR.21 Application:

- Three months before date of introduction in order to allow for agreements between the affected GSM networks.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- Within one week.

11. Date of Introduction of First MAP Version 2 Operation (to be filled at the discretion of PMN Operators):

Impact:

- Less critical to operation, however necessity for coordination.

Update to GSMA Infocentre RAEX IR.21 Application:

- As soon as possible, three months before first date of operation recommended.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- With next full update (if before date of first introduction), otherwise at least 6 weeks prior to first introduction.

12. Additional Data (Contact Names, Comments, and so on.):

Impact:

- Contact names critical to negotiations between the operators. Other miscellaneous information dependent on single case.

Update to GSMA Infocentre RAEX IR.21 Application:

- For contact names and addresses as soon as possible with date when the change will be valid. For other information left up to the operator.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- Within one week for contact names and addresses, for other information according to the request of the operator.

13. SMS GT addresses:

Impact:

- Information critical to operation of International SMS Interworking connections. New or changed data have to be implemented in the switches.

Update to GSMA Infocentre RAEX IR.21 Application:

- At least four weeks in advance, with date when the change will be valid.

Distribution from GSMA Infocentre RAEX IR.21 Application to GSM Association members:

- As soon as possible after the update has been made.

### 6.3 Update Intervals Scheme

The intervals for updating of information are described in the following schema:

Section Id	Section Name	Element (if needed)	Impact	Update
1	Organization information		Administrative only	
2	Network		Critical	3 months before
3	Network Information		Critical	3 months before
4	Routing Information		Critical	3 months before
5	International SCCP GW		Critical	3 months before
6	Domestic SCCP GW		Critical	3 months before
7	SCCP Protocol available at PMN		Normal	1 week
8	SUBSCRIBER IDENTITY AUTHENTICATION		Normal	1 week
9	Test Numbers Information		Medium. Maintenance usage	1 month before
10	MAP Interworking Specifically for Roaming		Normal. Critical for new version introduction	3 months before
11	MAP Optimal Routing of mobile-to-mobile calls		Normal	1 week
12	Inter-Operator SMS Enhancement		Normal	1 week
13	Network Elements Information		Medium	4 weeks before
14	USSD Information		Normal	1 week
15	CAMEL Information		Critical	3 months before
16	Packet Data Services Information		Critical	2 months before
17	IP-Roaming and IP-Interworking Information		Critical	2 months before
18	MMS Interworking Information		Critical	3 months before
19	WLAN Information		Critical	3 months before
20	LTE Roaming Information		Critical	3 months before
21	Contact Information		Critical for troubleshooting  Normal for other contacts	3 months before  1 week
22	Hosted Networks		Critical	45 days before

## 7 Annex C

### 7.1 RAEX IR.21 Business Requirements

In addition to the Word, Excel or PDF IR.21, Operators may also choose to exchange IR.21 data electronically by using RAEX IR.21 until a defined date.

If the “electronic” way is considered the initial option, after the defined deadline electronic format may become the only admitted and certified way to exchange PMN information.

RAEX IR.21 provides the means of exchanging the IR.21 using a pre-defined data format and according to a standardized business process represented here. The standard IR.21 will remain the legally binding document.

RAEX IR.21, when used, should conform to the latest version of IR.21 in order to avoid any loss of changes on Roaming Partners data.

RAEX IR.21 requirements are **Binding** within the GSMA Community.

For RAEX purposes, Service Providers (SP) in this document will be considered: Operators and Roaming Hubbing Providers.

### 7.2 RAEX IR.21 Exchange process and Notification functionalities

This section highlights and describes the exchange process to be used by the parties using RAEX IR.21 format.

### 7.3 RAEX IR.21 exchange process

Is supposed to have the exchange process performed by GSMA Infocentre.

The implementation of the data input could be executed in two different ways:

A - Manual by Mobile Network Operator

B - Using Infocentre GUI

#### (A). Manual by Mobile Network Operator

- According to the diagram below, an Operator could populate its own RAEX IR.21 XML file and submit it to the GSMA Infocentre using the procedure described.
- The Operator that submits the file to the Infocentre is in charge of conformity check and data validation.
- Conformity checks and validation of the data and the file are operations in charge of the sending Operator. The Infocentre allows the Operator to bring an image file containing the network interconnection diagram.
- The Infocentre allows the Operator to bring an image file containing the network interconnection diagram.

#### (B). Using Infocentre GUI



- The Infocentre GUI is an evolution of the user interface actually used for populating the Roaming Database. The GUI application is in charge to validate the integrity of the data and produce XML and PDF files. These will be then available for download.

If option A or B is used, once the data upload or data entry is completed, notification/distribution process starts towards the operator lists accordingly.

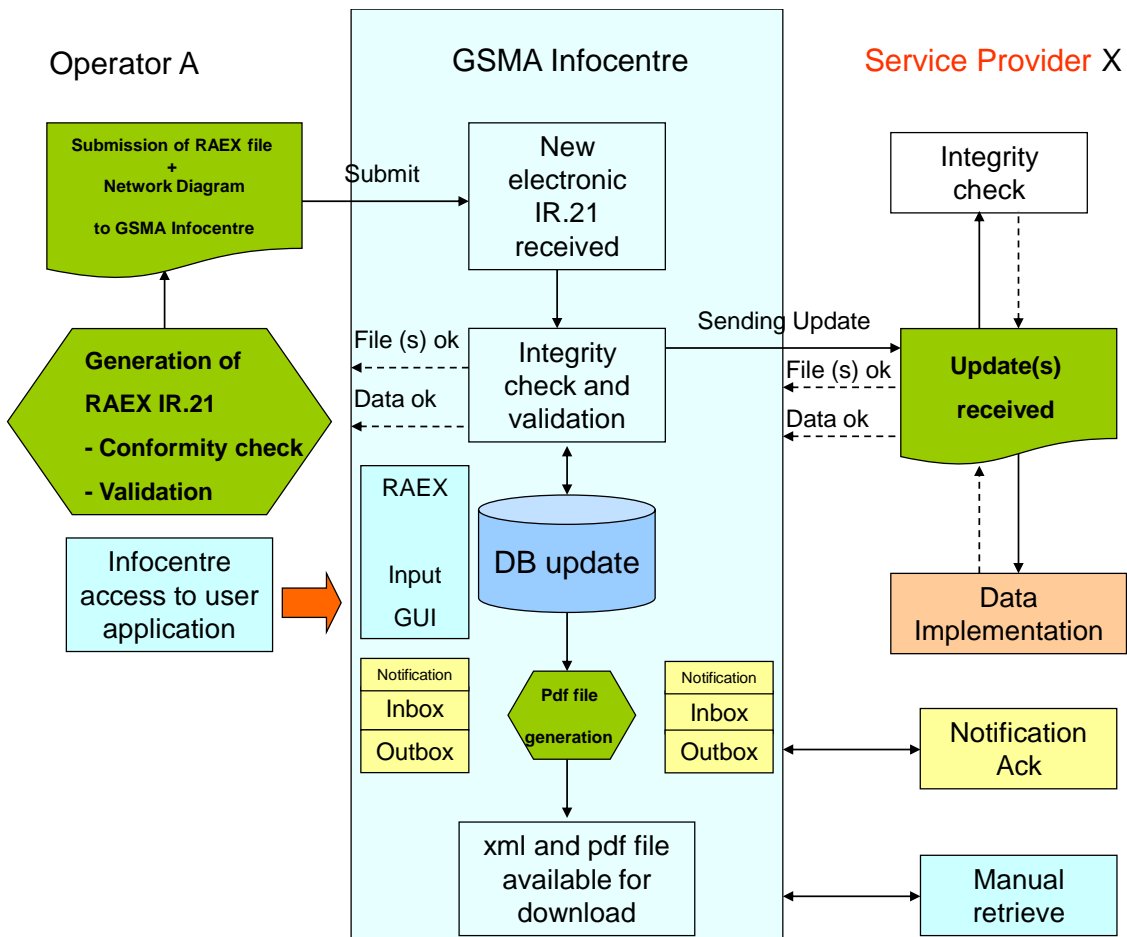


Figure 1: RAEX IR.21 Exchange Process

## 7.4 Details of Exchange process in manual or GUI scenarios

The first four steps are applicable in the manual upload of the XML file and network image by a PMN:

1. Operator A generates the RAEX IR.21 File containing all IR.21 data. Operator A should ensure that the File it produces is correctly formatted and populated. For this purpose an XML file template is used. Within the file the date of the change is indicated.
2. Operator A is also allowed to upload an image containing its network interconnection diagram
3. Submit the RAEX IR.21 File and an image to the GSMA Infocentre. The Infocentre will use this data to update the Internal Roaming Database. There will be a special section folder to allow a RAEX format upload.
4. An acknowledgement from the Infocentre, communicating the file has been correctly accepted and uploaded. Note: The Infocentre should also verify the integrity of the file and the structure according to the RAEX principles. It is out of scope to verify the correctness of data inserted by operators.
5. Operator A may use the Infocentre GUI as an interface for submitting its network data. The Internal Roaming Database is updated as per point 3.
6. The Infocentre sends a notification to the receiving party (to receiving parties listed accordingly) a new RAEX IR.21 is available within the website. This is done according to the notification preferences set by the receiving party within the Infocentre. The notification sent to the receiving parties may contain a number of RAEX IR.21 available.
7. SPX, on the receiving party side, will receive the updated notification and/or the updated XML file(s) and network diagrams, as it optionally has chosen within the notification/distribution section on the Infocentre.
8. SPX checks RAEX file(s) received for opening and readability of data. Any error on the file or corruption should be troubleshooted directly with the other party
9. Once the file has been verified by the receiving party, it will be loaded into systems according to internal procedures defined (for example manually, electronically)
10. According to the notification functionality, the party will communicate the right implementation and definition of the data sending back notification acknowledgement via the GSMA Infocentre RAEX IR.21 Application (see 3.3)

SPX is also able to manually retrieve XML/PDF IR.21 updated files and network diagrams.

The Infocentre for backward compatibility always generates PDF versions.

## 7.5 Notification functionalities

The notification of IR.21 updates is implemented per week (that is on Fridays) and contains a list of updates generated by operators and the reply acknowledges, if any/still.

The format of the notification is by email and the content provided is represented as listed below:

- Organization and contact name providing the update
- Alert number and URL to get access to the content
- Accessing the Infocentre page, an operator may acknowledge the receipt and provide implementation feedback (that is implemented or planned [date]). This is represented by an operator "outbox" section. This information is either transmitted back to the operator who sent the update and stored into an "inbox" section for that operator on the Infocentre.

- Reply method on email received could be used. The reply must contain information on acknowledge and implementation as above. The automation on the Infocentre replies the mechanism above for storing and providing back acknowledges.
- The weekly notification contains also the status of acknowledges with Infocentre URL to point for verification and consequently the table with operator list – Alert number of acks replied.

## **7.6 Company Logo**

Every operator is allowed to upload its company logo on the Infocentre at the same time the XML file is provided. The logo format can be a JPG file and will be automatically integrated into the PDF file while converted with the XML schema. The name of the file shall be “logo.jpg”.

If the update is done directly on the Infocentre via GUI, the company logo can also be loaded in the input page.

The company logo position will be in the first page of IR.21

## **7.7 Access to roaming Database**

Infocentre designated IR.21 administrators can access to Roaming Database for information retrieval. The method consists of accessing the relative page on the Infocentre containing the front end mask selection.

The mask contains a wizard to allow a cascade selection of the elements that are allowed to be queried. Possible elements are those defined in IR.21 Data Definition. The format of the output is provided in clear/text content.

At the same URL containing the query wizard, there is also the reference for downloading the entire IR.21 in XML or PDF versions.

## **7.8 File naming convention**

A Naming convention is applied to RAEX IR.21 file according to GSMA IT specifications. It contains the following information:

- Organisation name/title
- TADIG Code
- Infocentre Id reference number

## **7.9 Version Control and Change Log**

The main reference for IR.21 data is Annex A. Every potential change/addition to data structure and definition, with principles of Change Request process, will mirror changes in RAEX structure. A revision control mechanism in use is still valid and also applied for RAEX sections.

A general ChangeLog is automatically populated with the information already present per section on the Infocentre.

It is defined by two fields:

- DATE
- DESCRIPTION

Operators must every time use the latest version definition and IR.21 RAEX documents, in order to avoid any lack of data or fields into their networks.

A version control mechanism is maintained by the Infocentre.

### **7.10 Structure of data**

This paragraph shows the structure of the sections included within IR.21 Annex A with the purpose of:

A - Characterize sections with a tag (mandatory, optional, conditional)

B - Define dependencies between sections, if any

C - Identifying correctly the section name

In consideration of new services still in a design stage and scenarios already live (that is network extensions) it is proposed to structure the IR.21 information considering these new services and to base the identification of a PMN with the IMSI associated, as described in the image attached.

Major level of the structure contains operator general information, the “organization name” that manages a single or a group of PMN(s), major identified with the element “network” (level 1). Unique reference in this network level, according to IMSI and MGT information, is the TADIG code, managed and released by GSMA to every PMN.

Every PMN has a major definition with the fields IMSI and MGT and with the possibility of having multiple IMSI series translated in a single MGT. At the same level, a differentiation by NDC is represented with the right parameters associated. This need is to accomplish those PMN who are indicating different SCCP GW destinations for their E.164 ranges.


Every operator will have as many different network data blocks as the pair of IMSI / MGT series they have.

Representation of extended and non terrestrial network will be given by a new section named “Hosted Networks”.

Roaming Hubbing will have its own section with relevant information on HUB provider.

The aim of the structure is logical, in order to let the data being reflected and verified within stable conditions.

In the below diagram, IR.21 sections are quoted with ID reference and colour marked according to this legend:

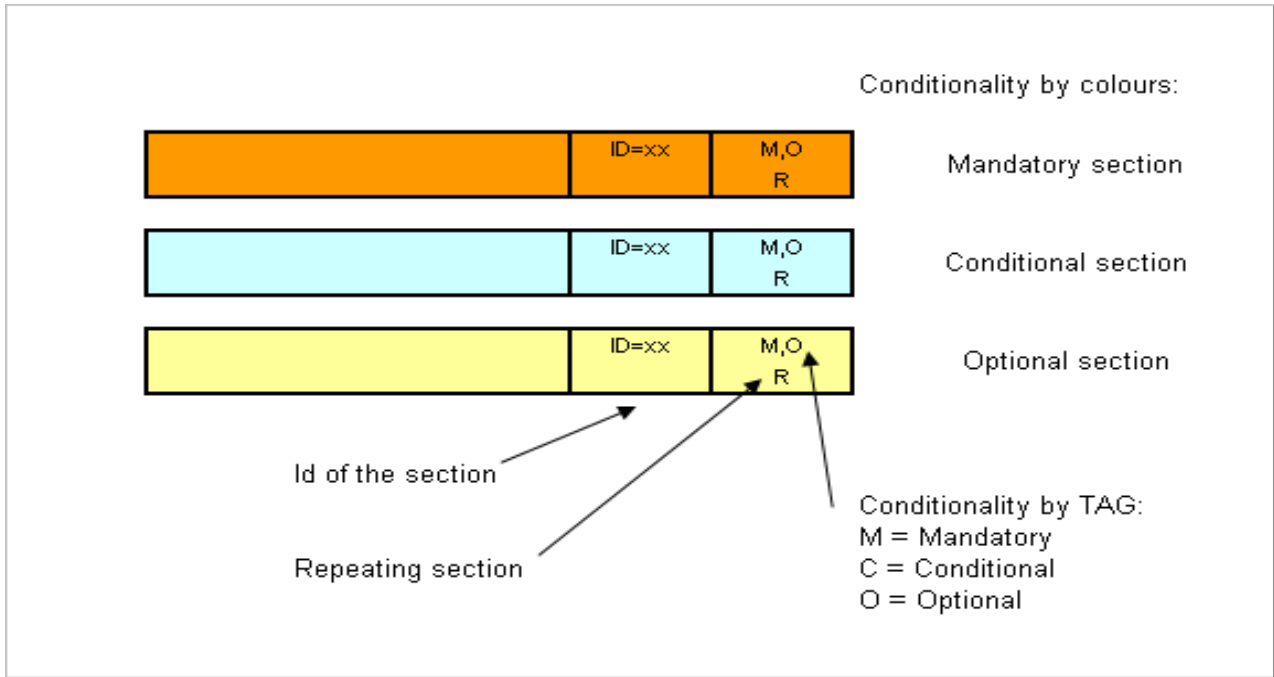

**Figure 2: RAEX IR.21 Conditionality legend**

Represented below are the Data Structure of IR.21 sections:

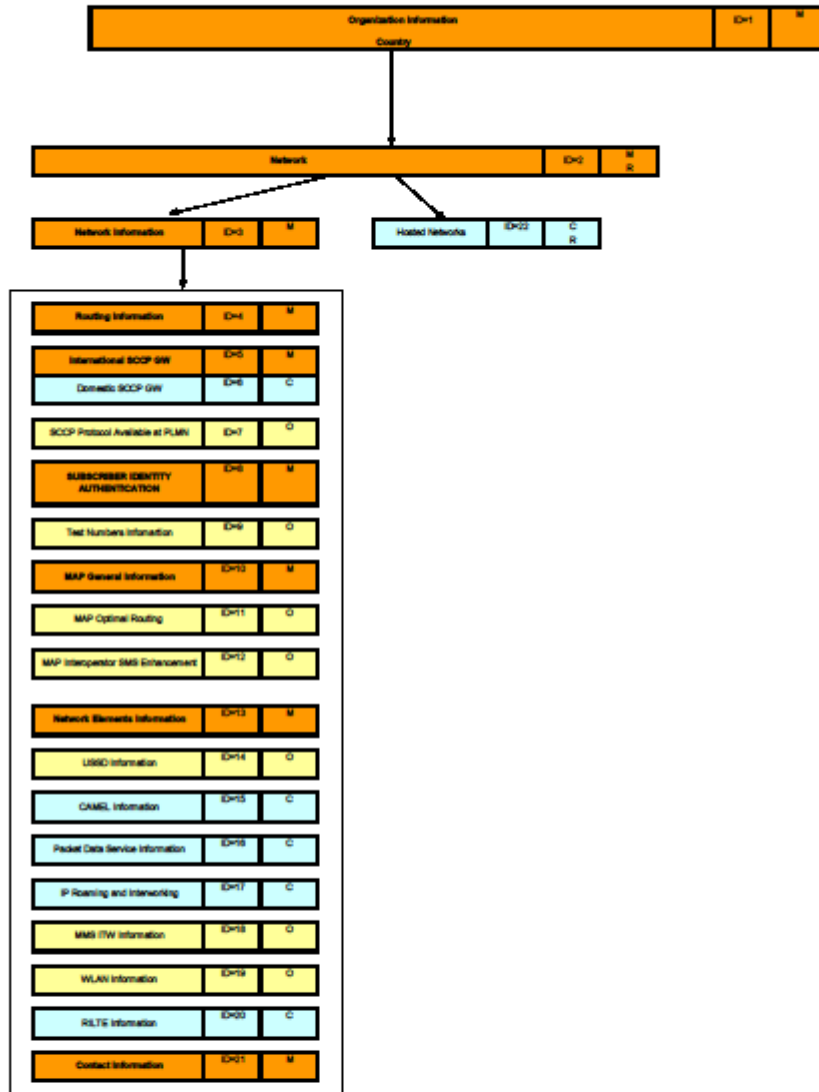


Figure 3: RAEX IR.21 Sections Data structure

## 7.11 IR.21 DATA DICTIONARY

This chapter contains detailed information for every field populated within IR.21, indicating whether they are Mandatory, Optional, type of content in the description of the field. This data should be used to further define technical requirements for RAEX XML file.

Starting from 6.3, top fields “Section name” and “ID” are used to uniquely identify the section, to be further addressed or referenced.

A legend is also created to define the structure of the content data.

### 7.11.1 Description

The table below describes each of the column headings used within the data dictionary. Every sub-chapter identifies IR.21 section name in

Column	Description	Example
Section Name	The name of the section	
ID	Section Id for reference	
Parent	Major referring element	
Element name	The name of the element described	
Format	Type format of the element	
Conditionality	Each element is defined as “Mandatory”, “Optional” or “Conditional”. - Conditional elements have a condition described in the particular “Description” field of the element. - Mandatory elements are a must. - Optional elements may not be present.	M= Mandatory C= Conditional O= Optional
Value Indicator	If available the value indicator contains a list of fix values allowed for the particular element or sub-element content	“Repeating” means the element can be used more times. “Y,N” means either value “Y” – yes or “N” – no, is allowed to be set.
Description	Textual description of the “IR.21 Element’s content”	Explicit description in case of “conditional” elements

**NOTE:** All free text fields must contain English text.

### 7.11.2 Terms legend

This legend is created with the intention to define the structure of common data repeated within the document. Elements defined in this legend are reported to the “format” field in next sections:

Name	Format	Value(s) allowed	Example
Date	yyyymmdd		20070116
E.164GT Address	ITU E.164 number composed by CC+NDC+SN, max length xx digits		393359609600
E.164GT Address range	ITU E.164 number range, length is max xx digits		393351111111-393359999999
IMSI	ITU E.212 number composed by MCC+MNC+MSIN, length is max 15 digits		222011234567890
MGT	ITU E.214 number translated from E.212 and composed by CC+NC+MSIN, length is max xx digits		393391234567890
ITU DPC	Point code expressed in decimal format: a-b-c, length is max xx digits	a,c=1digit 0-9 b=3 digits 0 to 999	2-046-0
ANSI DPC	Point code expressed in decimal format: a-b-c, length is max xx digits	a=1digit 0-9 b=3 digits 0 to 999 c=2 digits 0 to 99	2-046-00
APN Op Id	mncxxx.mccxxx.gprs	X=0-9	mnc001.mcc222.gprs
IP Address	a.b.c.d (IPv4 format)	a=1-255 b=0-255 c=0-255 d=1-255	222.234.222.234
IP Address range	a.b.c.d/x	a=1-255 b=0-255 c=0-255 d=0-255 x= CIDR denotation of subnet mask. Values allowed are 1-32	222.234.222.0/16
ASN	xxxxxxxxxx	Numeric Max 10 digit = 1- 6553565535	16232
Alpha	Alphanumeric		
Tel Number	(+) Number	(+) Number	+390612345678
WAP GW IP address	IP Address :port number		222.234.222.234:8080
Domain Name	Dot Alpha		Example: www.colorado.edu
URL (Uniform	URL		<a href="http://wap.google.it">http://wap.google.it</a> ; port may be included.



Resource Locator)		Example: <a href="http://wap.google.it:3447">http://wap.google.it:3447</a>
-------------------	--	--

### 7.11.3 History of Changes

Section name: History of changes			Conditionality: M,R		
Parent	Element Name	Format	Conditionality	Value Indicator	Description
	Section ID	Numeric	M		ID of the section that has been modified.
	Date of change	Date	M		Represents the date when the change has been made to the section
	Description	Alphanumeric, max 512 chars	M		Brief description of changes made to the section

7.11.4 Effective date of change

Section name: Effective date of changes			ID: 0	Conditionality: M,R		
Parent	Element Name	Format	Conditionality	Value Indicator	Description	
	Effective date of change	Date	M		Represents the date when the updated information contained into IR.21 will become effective	

7.11.5 Organization information

Section name: Organization Information			ID: 1	Conditionality: M		
Parent	Element Name	Format	Conditionality	Values	Description	
Organization Information	Organization Name	Alphanumeric Max 128 chars	M		Identifies the name of the operator	
Organization Information	Country Initials	Text Max 3 chars	M		Country Code abbreviated according to ISO 3166	
Organization Information	Network	N/A	M,R		Element containing all the information related to a particular network	

7.11.6 Network

Section name: Network				ID: 2	Conditionality: M,R
Parent	Element Name	Format	Conditionality	Values	Description
Network	TADIG Code	Alpha, max 5 chars	M		TADIG code associated to MCC/MNC of the network, according TD.13
Network	Network Type		M	Terrestrial, NonTerrestrial	
Network	Supported Technology Frequencies		O		Group element containing supported technology frequencies
SupportedTechnologyFrequencies	GSM		O		Group element containing a list of frequencies for GSM
GSM	GSMFrequency	Drop down list	M, R	T-GSM 380 T-GSM 410 GSM 450 GSM 480 GSM 710 GSM 750 T-GSM 810	This is a repeating element containing the GSM supported frequency bands.

Section name: Network				ID: 2	Conditionality: M,R	
Parent	Element Name	Format	Conditionality	Values	Description	
				GSM 850 GSM 900 E-GSM 900 R-GSM 900 DCS 1800 PCS 1900		
SupportedTechnologyFrequencies	UTRA/FDD		O		Group element containing a list of frequencies for UTRA/FDD	
UTRA/FDD	UTRA/FDD Frequency	Drop down list	M, R	1 - IMT 2.1 GHz 2 - PCS 1900 3 - DCS 1800 4 - AWS 5 - 850 MHz 7 - 2.6 GHz 8 - 900 MHz	This is a repeating element containing the UTRA/FDD supported frequency bands.	

Section name: Network				ID: 2	Conditionality: M,R	
Parent	Element Name	Format	Conditionality	Values	Description	
				9 - 1700 MHz		
				10 - Extended AWS		
				11 - 1.5 GHz Lower		
				12 - 700 MHz Lower, A+B+C		
				13 - 700 MHz Upper		
				14 - Public Safety		
				19 - Japan 800 MHz upper		
				20 - 800 MHz EDD		
				21 - 1.5 GHz Upper		
				22 - 3.5 Ghz		
				25 - PCS 1900		

Section name: Network				ID: 2	Conditionality: M,R
Parent	Element Name	Format	Conditionality	Values	Description
				+ G Block 26 - 800 MHz iDEN	
SupportedTechnologyFrequencies	UTRA/TDD		O		Group element containing a list of frequencies for UTRA/TDD
UTRA/TDD	UTRA/TDD Frequency	drop down list	M, R	A – TDD 2000 B – TDD 1900 C – TDD PCS D – TDD 2.6 GHz E – China TDD 2.3 GHz F – China TDD 1.9 GHz	This is a repeating element containing the UTRA/TDD supported frequency bands
SupportedTechnologyFrequencies	E-UTRA		O		Group element containing a list of frequencies for E-UTRA
E-UTRA	E-UTRA Frequency	Drop down list	M, R	1 - IMT 2.1 GHz	This is a repeating element containing E-UTRA supported frequency bands.

Section name: Network				ID: 2	Conditionality: M,R
Parent	Element Name	Format	Conditionality	Values	Description
				2 - PCS 1900 3 - DCS 1800 4 - AWS 5 - 850 MHz 7 - 2.6 GHz 8 - 900 MHz 9 - 1700 MHz 10 - Extended AWS 11 - 1.5 GHz Lower 12 - 700 MHz Lower, A+B+C 13 - 700 MHz Upper 14 - Public Safety	



Section name: Network				ID: 2	Conditionality: M,R
Parent	Element Name	Format	Conditionality	Values	Description
				17 - 700 MHz Lower, B+C	
				18 - Japan 800 MHz lower	
				19 - Japan 800 MHz upper	
				20 - 800 MHz EDD	
				21 - 1.5 GHz Upper	
				22 - 3.5 Ghz	
				23 - 2 GHz S- Band	
				24 - L Band	
				25 - PCS 1900 + G Block	
				26 - 800 MHz iDEN	
				27 - 850 MHz	

Section name: Network				ID: 2	Conditionality: M,R	
Parent	Element Name	Format	Conditionality	Values	Description	
				lower 28 - 700 MHz APAC 33 - TDD 2000 - 34 - TDD 2000 35 - TDD 1900 36 - TDD 1900 37 - TDD PCS 38 - TDD 2.6 GHz - 39 - China TDD 1.9 GHz 40 - China TDD 2.3 GHz 41 - TDD 2.5 GHz 42 - TDD 3.4		

Section name: Network				ID: 2	Conditionality: M,R
Parent	Element Name	Format	Conditionality	Values	Description
				GHz 43 - TDD 3.6 GHz 44 - 700 MHz APAC	
SupportedTechnologyFrequencies	OtherTechList		O		Group element containing a list of custom defined technologies
OtherTechList	OtherTech		M		Repeating element containing the name and all frequencies for the custom defined technology
OtherTech	TechnologyName	Alpha, max 256 chars	M		Element containing the name for the custom defined technology
OtherTech	FrequencyList		M		Group element containing a list of frequencies for the custom defined technology
FrequencyList	Frequency	Alpha, max 32 chars	M, R		This is a repeating element containing the supported frequency.
Network	Presentation of Country initials and Mobile Network Name	Alpha, max 128 digits	O		Identifies the Presentation of Country initials and Mobile Network Name

Section name: Network				ID: 2	Conditionality: M,R	
Parent	Element Name	Format	Conditionality	Values	Description	
Network	Abbreviated Mobile Network Name	Alpha, max 8 digits	O		Mobile Network name abbreviated	
Network	Network Colour Code	Text, Max 1 char, separated by comma if more than one	O		Network Colour Code agreed between operators with overlapping coverage that use the same Broadcast Control Channel (BCCH) frequency	
Network	Network Information	N/A	M,R	N/A		
Network	Hosted Networks	N/A	O,R	N/A		

7.11.7 Network Information

Section name: Network Information			ID: 3	Conditionality: M	
Parent	Element Name	Format	Conditionality	Value Indicator	Description
Network Information	Routing Information	N/A	M		
Network Information	International SCCP GW	N/A	CM		Mandatory for first network, optional for others
Network Information	Domestic SCCP GW	N/A	OC		
Network Information	SSCP Protocol available at PMN for International Roaming	N/A	O		
Network Information	Subscriber Identity Authentication	N/A	CM		Mandatory for first network, optional for others
Network Information	Auto Roam TTesting Number Information	N/A	O		

Section name: Network Information			ID: 3	Conditionality: M	
Parent	Element Name	Format	Conditionality	Value Indicator	Description
Network Information	MAP General Information	N/A	CM		Mandatory for first network, optional for others
Network Information	MAP Optimal Routing	N/A	O		
Network Information	MAP Interoperator SMS Enhancement	N/A	O		
Network Information	MSC/VLRNetwork Element	N/A	CM		Mandatory for first network, optional for others
Network Information	SMSC Address	N/A	M		
Network Information	USSD Information	N/A	OM		
Network Information	CAMEL Information	N/A	OC		Section is mandatory, where CAMEL service is supported by the PMN

Section name: Network Information			ID: 3	Conditionality: M	
Parent	Element Name	Format	Conditionality	Value Indicator	Description
Network Information	Vendor Information	N/A	O		
Network Information	Packet Data Services Information	N/A	OC		
Network Information	IP Roaming and IP Interworking Data Roaming Information	N/A	OC		
Network Information	MMS ITW Information	N/A	O		
Network Information	WLAN Information	N/A	O		
Network Information	LTE Roaming Information		O		

Section name: Network Information			ID: 3	Conditionality: M	
Parent	Element Name	Format	Conditionality	Value Indicator	Description
Network Information	Contact Information	N/A	CM		Mandatory for first network, optional for others



7.11.8 Routing Information

Section name: Routing Information				ID: 4	Conditionality: M	
Parent	Element Name	Format	Conditionality	Values	Description	
Routing Information	CCITT E.164 Number Series	N/A	M		Contains definitions for the node ranges in use in the PMN.	
Routing Information	E.212 Number Series	N/A	M		According ITU E.212, IMSI is composed by: 3 digits for MCC Max 3 digits for MNC	
Routing Information	E.214 Mobile Global Title (MGT)	N/A	M			
Routing Information	Number Portability	Boolean	M	Yes No		
Routing Information	Numbering Information	N/A	M			
Numbering Information	E.164 Number Ranges due to Number Portability	E.164 GT Address	M,R		E.164 Number Ranges due to Number Portability may be included in this section.	

Section name: Routing Information			ID: 4	Conditionality: M	
Parent	Element Name	Format	Conditionality	Values	Description
Numbering Information	(U) Sim Header	Numeric 6 digits	O		
Numbering Information	Additional Information	Alpha	M,R		Additional Information about Numbering and addressing may be included in this section.
Routing Information	Short number translation information	N/A	O		
CCITT E.164 Number Series	MSISDN(s) number ranges	N/A	M,R		Number ranges in use in the PMN.
CCITT E.164 Number Series	Network nodes Global Title number range(s)	N/A	M,R		
CCITT E.164 Number Series	MSRN Number Range(s)	N/A	C,R		Field is mandatory for non terrestrial networks, otherwise it is optional.  Definitions for Roaming Number ranges provided for MT calls in the PMN.

Section name: Routing Information				ID: 4	Conditionality: M	
Parent	Element Name	Format	Conditionality	Values	Description	
MSISDN(s) number ranges	Country Code (CC)		M			
MSISDN(s) number ranges	National Destination Code (NDC)		M			
MSISDN(s) number ranges	International DPC Primary		C		Primary Destination Point Code parameters mandatory for Signalling routing configuration. This field must be filled if SCCP routing differentiation is applied to group of E.164 number series, by using one of the DPC values defined in section "International SCCP GW"	
MSISDN(s) number ranges	International DPC Secondary		C		Secondary Destination Point Code parameters mandatory for Signalling routing configuration. This field must be filled if SCCP routing differentiation is applied to group of E.164 number series, by using one of the DPC values defined in section "International SCCP GW"	
Network nodes Global Title number range(s)	Country Code (CC)		M			

Section name: Routing Information				ID: 4	Conditionality: M	
Parent	Element Name	Format	Conditionality	Values	Description	
Network nodes Global Title number range(s)	National Destination Code (NDC)		M			
Network nodes Global Title number range(s)	International DPC  Primary		C		Primary Destination Point Code parameters mandatory for Signalling routing configuration. This field must be filled if SCCP routing differentiation is applied to group of E.164 number series, by using one of the DPC values defined in section "International SCCP GW"	
Network nodes Global Title number range(s)	International DPC  Secondary		C		Secondary Destination Point Code parameters mandatory for Signalling routing configuration. This field must be filled if SCCP routing differentiation is applied to group of E.164 number series, by using one of the DPC values defined in section "International SCCP GW"	
MSRN Number Range(s)	Country Code (CC)		M			
MSRN Number Range(s)	National Destination Code (NDC)		M			

Section name: Routing Information				ID: 4	Conditionality: M	
Parent	Element Name	Format	Conditionality	Values	Description	
E.212 Number Series	Mobile Country Code (MCC)		M			
E.212 Number Series	Mobile Network Code (MNC)		M			
E.214 Mobile Global Title (MGT)	Country Code of MGT (CC)		M			
E.214 Mobile Global Title (MGT)	Network Code of MGT (NC)		M			
Short number translation information	Translation information		C, R			
Translation information	Short number	numeric	M		Short number to be translated by the VMSC	

Section name: Routing Information				ID: 4	Conditionality: M
Parent	Element Name	Format	Conditionality	Values	Description
Translation information	Long number	ITU E.164 number	M		Long number result of the short number translation without international call prefix (+, 00, 011...)
Translation information	Service name	Alpha	M		Name of the service accessed when dialling the short number (voice mail, customer care...)

#### 7.11.9 International SCCP GW

Section name: International SCCP GW				ID: 5	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
International SCCP GW	SCCP Carrier	N/A	M,R		
SCCP Carrier	SCCP Carrier Name	Alpha max 64 chars	M		The name of the SCCP Carrier
SCCP Carrier	DPC Info	N/A	M,R		
SCCP Carrier	Connectivity Information	Listed values	M	Primary Backup	Define the preferred type of connectivity Primary or Backup

SCCP Carrier	Comments	Alpha max 64 chars	O		To provide more information in case i.e. of regional routing
SCCP Carrier	MNO TADIG Code List	Alpha, max 5 chars	O, R		List of MNO's TADIG Codes identifying which roaming partner shall use the carrier to exchange the traffic with the operator
DPC Info	Signature	Alpha max 64 letters	M		Name associated to the switching centre
DPC Info	Type	Text max 64 chars	O		Type of switching centre: ISC, MSC, Stand-alone SCCP
DPC Info	International DPC	Alpha	M		Destination Point Code parameters mandatory for Signalling routing configuration. This value can be used for defining Primary and Secondary DPC information in Routing Information Section.  Both ANSI and ITU format shall be supported
DPC Info	Comments	Text max 64 chars	O		To provide more information about the specific DPC used (that is primary, secondary)
International SCCP GW	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.10 Domestic SCCP GW

Section name: Domestic SCCP GW				ID: 6	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
Domestic SCCP GW	SCCP Carrier	N/A	M,R		
SCCP Carrier	SCCP Carrier Name	Alpha max 64 chars	M		The name of the SCCP Carrier
SCCP Carrier	DPC Info	N/A	M,R		
DPC Info	Signature	Alpha max 64 letters	M		Name associated to the switching centre
DPC Info	Type	Text max 64 chars	O		Type of switching centre: ISC, MSC, Stand-alone SCCP
DPC Info	Domestic DPC	Alpha	M		Destination Point Code parameters mandatory for Signalling routing configuration  Both ANSI and ITU format shall be supported
DPC Info	Comments	Text max 64 chars	O		To provide more information about the specific DPC used (that is primary, secondary)
Domestic SCCP GW	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable



Section name: Domestic SCCP GW				ID: 6	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.11 SCCP Protocol available at PMN for connection for International SS7 Roaming Signalling

Section name: SCCP Protocol available at PMN				ID: 7	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
SCCP Protocol available at PMN	ETSI (ITU-T)	Boolean	M	Yes No	
SCCP Protocol available at PMN	ANSI	Boolean	M	Yes No	
SCCP Protocol available at PMN	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

**7.11.12 SUBSCRIBER IDENTITY AUTHENTICATION**

Section name: Subscriber Identity Authentication				ID: 8	Conditionality: C	
Parent	Element Name	Format	Conditionality	Values	Description	
Subscriber Identity Authentication	Authentication performed for roaming subscribers at the commencement of GSM Service	Boolean	M	Yes No	Write YES if authentication is performed as described within the current version of SG.15	
Subscriber Identity Authentication	Authentication performed for roaming subscribers in case of GPRS	Boolean	C	Yes No	Mandatory where GPRS is supported: write YES if authentication is performed as described within the current version of SG.15 under section Subscriber Identity Authentication/ Roamed Subscribe	
Subscriber Identity Authentication	A5 Cipher Algorithm version in use	Alpha	M		Version of A5 algorithm in use	
Subscriber Identity Authentication	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable	
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13	

7.11.13 Test Numbers Information

Section name: Test Numbers Information			ID: 9	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description
Test Numbers Information	Test Number	N/A	M,R		
Test Number	Number Type	Listed values	M	AAC DAAC FAAC VTAAC RTAAC NNAAC NNDAAC NNFAAC NNVTAAC NNRTAAC CLIAAC	Possible Number Types for test numbers are: AAC – Voice Automatic Answering Circuit DAAC – Data Automatic Answering Circuit FAAC – Fax Automatic Answering Circuit VTAAC – Video Telephony Automatic Answering Circuit RNAAC – MSRN range Automatic Answering Circuit NN* – For any AAC type if an AAC is accessible from Network-Network Interconnection Interface only Number Type is prefixed with NN (for example NNAAC for voice AAC) CLI* – For any AAC type if an AAC in any way presents received CLI information Number Type is prefixed with CLI (for example CLIAAC for

Section name: Test Numbers Information				ID: 9	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
				CLIDAAC CLIFAAC CLIVTAAC CLIRTAAC SMSIW MMSIW	voice AAC) SMSIW – test number for SMS Interworking testing MMSIW – test number for MMS Interworking testing
Test Number	Number	E.164	M		
Test Number	Location	Text max 32 char	O		
Test Number	Comments	Text max 128 char	O		
Test Numbers Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

### 7.11.14 MAP Interworking Specifically for Roaming

In this section, all the elements described contain maximum three sub elements. MSC/VLR and SGSN are relevant in case of Inbound Roaming context. Outbound Roaming doesn't require any differentiation. The values applicable to these sub elements are: MAPv1, MAPv2, MAPv3 or Not Applicable. All the elements defined in the following table are Mandatory.

Section name: MAP Interworking Specifically for Roaming		ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements	Description
MAP Interworking Specifically for Roaming	networkLocUp	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	roamingNumberEnquiry	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	InfoRetrieval	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	subscriberDataMngt	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	

Section name: MAP Interworking Specifically for Roaming		ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements	Description
MAP Interworking Specifically for Roaming	networkFunctionalSs	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	MwdMngt	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	shortMsgMT-Relay (called shortMsgRelay in v1)	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	shortMsgMO-Relay (called shortMsgRelay in v1)	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	

Section name: MAP Interworking Specifically for Roaming		ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements	Description
MAP Interworking Specifically for Roaming	ss-InvocationNotification	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	subscriberInfoEnquiry	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	gprsLocationUpdate	Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	locationCancellation	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	

Section name: MAP Interworking Specifically for Roaming		ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements	Description
MAP Interworking Specifically for Roaming	MsPurging	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	reset	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	
MAP Interworking Specifically for Roaming	networkUnstructuredSs	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	Reporting	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	CallCompletion	Inbound Roaming: MSC/VLR Outbound Roaming	



Section name: MAP Interworking Specifically for Roaming		ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements	Description
MAP Interworking Specifically for Roaming	IstAlerting	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	serviceTermination	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	locationSvcGateway	Outbound Roaming	
MAP Interworking Specifically for Roaming	mm-EventReporting	Inbound Roaming: MSC/VLR Outbound Roaming	
MAP Interworking Specifically for Roaming	AuthenticationFailureReport	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming	

Section name: MAP Interworking Specifically for Roaming			ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements		Description
MAP Interworking Specifically for Roaming	ImsiRetrieval	Inbound Roaming: MSC/VLR Outbound Roaming		
MAP Interworking Specifically for Roaming	GprsNotifyContext	Inbound Roaming: SGSN Outbound Roaming		
MAP Interworking Specifically for Roaming	gprsLocationInfoRetrieval	Inbound Roaming: SGSN Outbound Roaming		
MAP Interworking Specifically for Roaming	FailureReport	Inbound Roaming: SGSN Outbound Roaming		
MAP Interworking Specifically for Roaming	secureTransportHandling	Inbound Roaming: MSC/VLR Inbound Roaming: SGSN Outbound Roaming		
MAP Interworking Specifically for Roaming	List of TADIG codes	N/A	O	List of IMSI ranges for which the section content is also applicable

Section name: MAP Interworking Specifically for Roaming			ID: 10	Conditionality: C
Parent	Element Name	Applicable Sub Elements		Description
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R	TADIG code associated to MCC/MNC of the network, according TD.13

### 7.11.15 MAP Optimal Routing of mobile-to-mobile calls

All the elements described in the following section contain maximum three sub elements. (V)MSC and GMSC are relevant in case of Inbound Roaming context. HLR is the element for Outbound Roaming. The values applicable to these sub elements are: MAPv1, MAPv2, MAPv3 or Not Applicable. All the elements defined in the following table are Optional.

Section name: MAP Optimal Routing of mobile-to-mobile calls			ID: 11	Conditionality: O
Parent	Element Name	Applicable Sub Elements		Description
MAP Optimal Routing of mobile-to-mobile calls	CallControlTransfer	Inbound Roaming: (V)MSC Inbound Roaming: GMSC		
MAP Optimal Routing of mobile-to-mobile calls	LocationInfoRetrieval	Inbound Roaming: GMSC Outbound Roaming: HLR		
MAP Optimal Routing of mobile-to-mobile calls	List of TADIG codes	N/A	O	List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R	TADIG code associated to MCC/MNC of the network, according TD.13

### 7.11.16 MAP Inter-Operator SMS Enhancement

All the elements described in the following section contain maximum three sub elements. SMS-GMSC and SMS-IWMSC are relevant in case of Inbound Roaming context. HLR is the element for Outbound Roaming. The values applicable to these sub elements are: MAPv1, MAPv2, MAPv3 or Not Applicable. All the elements defined in the following table are Optional.

Section name: MAP Inter-Operator SMS Enhancement				ID: 12	Conditionality: O
Parent	Element Name	Applicable Sub Elements			Description
Inter-Operator SMS Enhancement	shortMsgGateway	Inbound Roaming: SMS-GMSC Outbound Roaming: HLR			
Inter-Operator SMS Enhancement	shortMsgAlert	Inbound Roaming: SMS-IWMSC Outbound Roaming: HLR			
Inter-Operator SMS Enhancement	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.17 Network Elements Information

Section name: Network Elements Information				ID: 13	Conditionality: C	
Parent	Element Name	Format	Conditionality	Values	Description	
Network Elements Information	Network Node	N/A	M,R			
Network Node	Node Type	Listed values	M		Type of the node (the complete list to be defined)	
Network Node	Node Id	Alpha max 16 chars	O	BTS BSC NodeB RNC	The name associated to the node. Example: "SGSNRM4"	

Section name: Network Elements Information				ID: 13	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
				E-NodeB CGSN EIR GGSN HLR MMSC MSC MSC-2G MSC-3G MSC-2G+3G MSC/VLR MSC/VLR-2G MSC/VLR-3G MSC/VLR-2G+3G	[new node types available on LTE]

Section name: Network Elements Information				ID: 13	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
				SCP	
				SGSN	
				SGSN-2G	
				SGSN-3G	
				SGSN-2G+3G	
				SMSC	
				IP-SMGW	
				SSP	
				HSS	
				VLR	
				MME	
				SGW	
				PGW	
				PCRF	
				IN	



Section name: Network Elements Information				ID: 13	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
				MGW MSS/VLR SoR USSD GW Other	
Network Node	GT (E.164) Address(es)	E.164 GT Address or E.164 GT	O		GT address or range of GT addresses

Section name: Network Elements Information				ID: 13	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
		Address range			
Network Node	IP Address(es)	IP Address or IP Address range(s)	C		IP address or range of IP addresses are present in case of SGSN or GGSN node types
Network Node	Vendor Info	Alpha max 64 chars	O		
Network Node	SW/HW Version	Alpha max 64 chars	O		
Network Node	Dual Access	Boolean	O		
Network Node	Location	Alpha max 64 chars	O		
Network Node	UTC Time Offset	UTC	M		Time Zone of the area most served by MSC/VLR, in UTC + offset
Network Node	DST	N/A	O		Applicability of Daylight Savings Time (DST), if any.
DST	DST Start Date	Date	M		DST starting Date
DST	DST End Date	Date	M		DST ending Date

Section name: Network Elements Information			ID: 13	Conditionality: C	
Parent	Element Name	Format	Conditionality	Values	Description
Network Elements Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.18 USSD Information

Section name: USSD Information				ID: 14	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
USSD Information	USSD capability available	Boolean	Mandatory	Yes No	Yes means USSD capability is supported including all of case a), section 5.1.2, 3GPP TS 22.090 / GSM 02.90.
USSD Information	Supported USSD Phase	Listed values	Conditional	Phase 1 Phase 2	The field is mandatory, where USSD capability is available.  Phase 1 only support mobile initiated operation (pull operation)  Phase 2 support for network initiated operation (pull and push operation).
USSD Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.19 CAMEL Information

Section name: CAMEL Information				ID: 15	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
CAMEL Info	gsmSSF/MSC	N/A	M		
gsmSSF/MSC	CAP Version Supported Inbound	Listed values	O	CAPv1 CAPv2 CAPv3 CAPv4	
gsmSSF/MSC	CAP Version Supported Outbound	Listed values	O	CAPv1 CAPv2 CAPv3 CAPv4	
gsmSSF/MSC	CAP Version Planned	N/A	O		
CAP Version Planned	Planned Version	Listed values	M	CAPv2 CAPv3	

Section name: CAMEL Information				ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
				CAPv4		
CAP Version Planned	Planned Date	Date	O			
CAMEL Info	CAMEL re-Routing Numbering Information	N/A	O			
CAMEL re-Routing Numbering Information	List of numbers used for re-routing purposes	E.164GT Address	M,R		To provide information of Re Routing CAMEL number for troubleshooting	
gsmSSF/MSC	CAPv4 Partial Implementations	N/A	C		Must be present if CAP version supported is CAPv4.	
CAPv4 Partial Implementations	CAMEL Phase 4 CSIs	N/A	M			
CAPv4 Partial Implementations	Functionalities	N/A	M			

Section name: CAMEL Information			ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description
CAMEL Phase 4 CSIs	O-CSI	Boolean	M		
CAMEL Phase 4 CSIs	D-CSI	Boolean	M		
CAMEL Phase 4 CSIs	VT-CSI	Boolean	M		
CAMEL Phase 4 CSIs	MT-SMS-CSI	Boolean	M		
Functionalities	Initiate Call Attempt	Boolean	M		
Functionalities	Split Leg	Boolean	M		
Functionalities	Move Leg	Boolean	M		

Section name: CAMEL Information			ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description
Functionalities	Disconnect Leg	Boolean	M		
Functionalities	Entity Released	Boolean	M		
Functionalities	DFC With Argument	Boolean	M		
Functionalities	Play Tone	Boolean	M		
Functionalities	DTMF Mid Call	Boolean	M		
Functionalities	Charging Indicator	Boolean	M		
Functionalities	Alerting DP	Boolean	M		



Section name: CAMEL Information				ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
Functionalities	Location At Alerting	Boolean	M			
Functionalities	Change Of Position DP	Boolean	M			
Functionalities	OR Interactions	Boolean	M			
Functionalities	Warning Tone Enhancements	Boolean	M			
Functionalities	CF Enhancements	Boolean	M			
CAMEL Info	gprsSSF/SGSN	N/A	O			
gprsSSF/SGSN	CAP Version Supported	Listed values	M	CAPv3 CAPv4		

Section name: CAMEL Information				ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
gprsSSF/SGSN	CAP Version Planned	N/A	O			
gprsSSF/SGSN	Partial implementations supported in CAP version 4	N/A	C			
Partial implementations supported in CAP version 4	CAMEL Phase 4 CSIs	N/A	M			
CAMEL Phase 4 CSIs	MT-SMS-CSI	Boolean	M			
CAMEL Phase 4 CSIs	MG-CSI	Boolean	M			
CAMEL Phase 4 CSIs	PSI Enhancements	Boolean	M			

Section name: CAMEL Information				ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
CAMEL Info	CAMEL Functionality Information	N/A	O,R			
CAMEL Functionality Information	Services name	Alpha max 64 chars	M			
CAMEL Functionality Information	SK	Numeric	M			
CAMEL Functionality Information	CAMEL Version	Listed values	M	CAPv1 CAPv2 CAPv3 CAPv4		
CAMEL Functionality Information	SCP GT Addresses	E.164 GT Address	M,R		One or more SCP GT Addresses referring to the service name	
CAMEL Info	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable	

Section name: CAMEL Information			ID: 15	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

**7.11.20 Packet Data Services Information**

Section name: Packet Data Services Information			ID: 16	Conditionality: O		
Parent	Element Name	Format	Conditionality	Values	Description	
Packet Data Services Information	APN Operator Identifier	APN OpID	M,R			
Packet Data Services Information	List of APN's available for testing and troubleshooting	N/A	O			
List of APN's available for testing and troubleshooting	WEB	N/A	O,R			
WEB	APN	Alpha	M			
WEB	Username	Alpha	O			
WEB	Password	Alpha	O			

Section name: Packet Data Services Information				ID: 16	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
WEB	ISP DNS IP address (primary)	IP Address	O			
WEB	ISP DNS IP address (secondary)	IP address	O			
WAP	APN	Alpha	M			
WAP	Username	Alpha	O			
WAP	Password	Alpha	O			
WAP	WAP Gateway IP address	WAP GW IP address	M			
WAP	WAP Server URL	URL	M			

Section name: Packet Data Services Information				ID: 16	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
WAP	WAP 1.0 Port(s)	Numeric	O,R		Numeric Field 6 Digits, no drop down list
WAP	WAP 2.0 Port(s)	Numeric	O,R		Numeric Field 6 Digits, no drop down list
MMS	APN	Alpha	M		
MMS	Username	Alpha	O		
MMS	Password	Alpha	O		
MMS	WAP Gateway IP address	WAP GW IP address	M		
MMS	WAP Server URL	URL	M		

Section name: Packet Data Services Information				ID: 16	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
List of APN's available for testing and troubleshooting	M2M	N/A	O,R			
M2M	APN	Alpha	M			
M2M	Username	Alpha	O			
M2M	Password	Alpha	O			
M2M	ISP DNS IP address (primary)	IP Address	O			
M2M	ISP DNS IP address (secondary)	IP address	O			
Packet Data Services Information	GTP Version	N/A	M			



Section name: Packet Data Services Information				ID: 16	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
GTP Version	SGSN	Listed Values	M	GTPv0 GTPv1		
GTP Version	GGSN	Listed Values	M	GTPv0 GTPv1		
Packet Data Services Information	Data services supported	N/A	M,R		Repeating fields indicating one or more data services supported in a PMN	
Data services supported	Data Service	Listed Values	M	GPRS EDGE 3G PS HSDPA HSUPA		
Data services supported	Multislot Class Capability	Alpha	O		Maximum Multislot class capability available	

Section name: Packet Data Services Information				ID: 16	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
Packet Data Services Information	Multiple PDP Context support	N/A	M		Query on Multiple PDP context support	
Multiple PDP Context Support	Supported or Not Supported	Boolean	M	Yes/No		
Multiple PDP Context Support	Number of simultaneous Primary PDP Context	Numeric	M,C			
Packet Data Services Information	IPv6 Connectivity Information	N/A	M,R		Query on IPv6 connectivity support	
IPv6 Connectivity Information	SGSN support	N/A	M			
SGSN support	IPv4v6 PDP Type	Boolean	M	Yes/No		

Section name: Packet Data Services Information				ID: 16	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
SGSN support	IPv6 PDP Type	Boolean	M	Yes/No		
IPv6 Connectivity Information	GGSN support	N/A	M			
GGSN support	IPv4v6 PDP Type	Boolean	M	Yes/No		
GGSN support	IPv6 PDP Type	Boolean	M	Yes/No		
Packet Data Services Information	List of 2G/3G QOS profiles		O,R		List of QOS profiles. It shall be possible to define up to 10 QOS profiles.	
List of 2G/3G QOS profiles	Profile name	Alpha	M		Free text that could be used as a reference in AA.14.	
List of 2G/3G QOS profiles	Traffic Class	Alpha	M	conversational streaming	Type of application for which the Radio Access Bearer service is optimised.	

Section name: Packet Data Services Information				ID: 16	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
				interactive background	Only one value per QOS profile.
List of 2G/3G QOS profiles	ARP	Alpha	M	1; 2; 3	Specifies the relative importance compared to other UMTS bearers for allocation and retention of the UMTS bearer.  List of ARP values separated by comma
List of 2G/3G QOS profiles	evolvedARP	Alpha	M	1; 2; 3; 4; 5; 6; 7; 8; 9; 10; 11; 12; 13;14;15	Enhances the Allocation/Retention Priority attribute  List of eARP values separated by comma
List of 2G/3G QOS profiles	Maximum Bit Rate Uplink	Numeric	O	no drop down list  0 to 10Gbps	The Maximum bitrate is the upper limit a user or application can accept or provide.
List of 2G/3G QOS profiles	Maximum Bit Rate Downlink	Numeric	O	no drop down list  0 to 10Gbps	The Maximum bitrate is the upper limit a user or application can accept or provide.

Section name: Packet Data Services Information				ID: 16	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
List of 2G/3G QOS profiles	Delivery order	Boolean	O	Yes/No	Indicates whether the UMTS bearer shall provide in-sequence SDU delivery or not.
List of 2G/3G QOS profiles	Maximum SDU size	Numeric	O	From 10 to 1520 octets per steps of 10	The maximum SDU size for which the network shall satisfy the negotiated QoS.
List of 2G/3G QOS profiles	SDU format information	Numeric	O		List of possible exact sizes of SDUs  Not applicable for Interactive and Background traffic classes
List of 2G/3G QOS profiles	SDU error ratio	Alpha	O	Drop down list  1*10 <sup>-2</sup> 7*10 <sup>-3</sup> 1*10 <sup>-3</sup> 1*10 <sup>-4</sup> 1*10 <sup>-5</sup> 1*10 <sup>-6</sup>  1*10 <sup>-1</sup>	Indicates the fraction of SDUs lost or detected as erroneous.
List of 2G/3G QOS profiles	Residual BER	Alpha	O	Drop down list  5*10 <sup>-2</sup> 1*10 <sup>-2</sup>	Indicates the undetected bit error ratio for each sub-flow in the delivered SDUs.

Section name: Packet Data Services Information				ID: 16	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
				$5 \cdot 10^{-3}$ $4 \cdot 10^{-3}$ $1 \cdot 10^{-3}$ $1 \cdot 10^{-4}$ $1 \cdot 10^{-5}$ $1 \cdot 10^{-6}$ $6 \cdot 10^{-8}$	
List of 2G/3G QOS profiles	Delivery of erroneous SDUs	Boolean	O	Yes/No	Indicates whether SDUs with detected errors shall be delivered or not.
List of 2G/3G QOS profiles	Guaranteed bit rate Uplink	Numeric	O	no drop down list 0 to 10Gbps	Describes the bitrate the UMTS bearer service shall guarantee to the user or application.  Not applicable for Interactive and Background traffic classes.
List of 2G/3G QOS profiles	Guaranteed bit rate Downlink	Numeric	O	no drop down list 0 to 10Gbps	Describes the bitrate the UMTS bearer service shall guarantee to the user or application.  Not applicable for Interactive and Background traffic classes.
List of 2G/3G QOS profiles	Traffic handling priority	Alpha	O	All 1	Specifies the relative importance for handling of all SDUs belonging to the radio access bearer

Section name: Packet Data Services Information				ID: 16	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
				2 3	compared to the SDUs of other bearers. Optional for Interactive traffic class Not applicable for other traffic classes
List of 2G/3G QOS profiles	Support of Speech source	Boolean	O	Yes/No	Not applicable for Interactive and Background traffic classes Optional for other traffic classes
List of 2G/3G QOS profiles	Support of Signalling indication	Boolean	O	Yes/No	Only applicable for Interactive traffic class Optional for other traffic classes
Packet Data Services Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.21 IP-Roaming and IP-Interworking Information

Section name: IP-Roaming and IP-Interworking Information				ID: 17	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
IP-Roaming and IP-Interworking Information	All IP address ranges used by PMN for connection to Inter-PMN IP backbone	IP address ranges	M,R		IP addresses or IP address range(s) of all operator's nodes that connect to the inter-PMN IP backbone network known as the "GRX" for example GGSNs, SGSNs, MMSCs, AAA Servers/Proxies, DNS Servers etc. This information is used for firewall and Border Gateway configuration (see PRD IR.34).
IP-Roaming and IP-Interworking Information	Any additional MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the Routing Area Identity (RAI) in GTP messaging from SGSNs	N/A			Provide the details of any MNC/MCC that is different to the E.212 field (located at the top of the IR.21 form) that can be sent from any SGSN in the VPMN to the GGSN in the HPMN, in the Create PDP Context Request and Update PDP Context Request GTP messages. If only the MNC/MCC as stated in the E.212 field is sent to the HPMN, this table should be left blank.
Any additional MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the	MCC	MCC (3 digits)	O		Multiple values allowed



Section name: IP-Roaming and IP-Interworking Information				ID: 17	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
Routing Area Identity (RAI) in GTP messaging from SGSNs					
Any additional MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the Routing Area Identity (RAI) in GTP messaging from SGSNs	MNC	MNC (2/3 digits)	O		Multiple values allowed
IP-Roaming and IP-Interworking Information	Autonomous System Number(s) (ASN)	AS number	M,R		The Autonomous System Number (ASN) is a 16 or 32 bit integer that every PMN must assign to their IP network that is seen as one Autonomous System (AS). The ASN enables the exchange of exterior routing information between neighbouring Autonomous Systems. According to RFC4893, 4-Byte AS Numbers refers to ASN in the range 0.0 – 65535.65535.

Section name: IP-Roaming and IP-Interworking Information			ID: 17	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description
Any additional MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the User Location Information (ULI) in GTP messaging from SGSNs	MCC	MCC (3 digits)	O		Multiple values allowed
Any additional MNC/MCC (that is different to the MNC/MCC in the E.212 field) that may be sent in the	MNC	MNC (2/3 Digits)	O		Multiple values allowed
IP-Roaming and IP-Interworking Information	List of PMN authoritative DNS server IP addresses & names	IP Address	O,R		IP address(es) and name(s) of DNS server(s) that are authoritative DNS server(s) that is DNS servers that answer DNS requests/queries from local caching DNS servers. Note that DNS hostname(s) given in this field should match the actual name(s) configured in the operator DNS server(s) (this is to avoid conflict with the NS records in the Root DNS and operator DNS

Section name: IP-Roaming and IP-Interworking Information				ID: 17	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
					servers).
IP-Roaming and IP-Interworking Information	List of PMN local caching DNS server IP addresses & names	IP Address	O,R		If an IP Address is defined, the name of the DNS Server is not a Mandatory Element
IP-Roaming and IP-Interworking Information	IP address that responds to ping/traceroute	IP Address	O,R		Pingable and traceroutable IP address of a node within the operator's AS. Maximum size for ping is 64 bytes. Minimum time interval for pinging is 1 hour.
IP-Roaming and IP-Interworking Information	GRX provider(s)	Alpha max 64 chars	M,R		Name of the GRX Provider
IP-Roaming and IP-Interworking Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.22 MMS Interworking Information

Section name: MMS Interworking Information				ID: 18	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
MMS Interworking Information	MMSE		M,R			
MMSE	Domain name of MMSC	Domain name	M			
MMSE	IP address range for MMSC	IP Address range	M			
MMSE	IP address(es) of incoming MTA	IP Address	M,R			
MMSE	IP address(es) of outgoing MTA	IP Address	M,R			
MMSE	Max. size of MMS allowed	Pattern "Kb", numeric	O			

Section name: MMS Interworking Information				ID: 18	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
MMSE	Delivery Report allowed	Boolean	M	Yes No		
MMSE	Read Report allowed	Boolean	M	Yes No		
MMSE	MMS IW Hub Provider(s) GT addresses	E.164GT Address range	O,R			
MMSE	MMS IW Hub Provider(s) Name(s)	Alpha, max 64 chars	O			
MMS Interworking Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable	
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13	

7.11.23 WLAN Information

Section name: WLAN Information				ID: 19	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
WLAN Information	RADIUS server/ RADIUS proxy IP address(es) – Incoming Traffic	IP address	M,R			
WLAN Information	RADIUS server/ RADIUS proxy IP address(es) – Outgoing Traffic	IP address	M,R			
WLAN Information	IP address range(s) used for WLAN roaming signalling	IP address range	M,R			
WLAN Information	Realm(s)	Domain name	M,R			
WLAN Information	Brand name of the WLAN service	Alpha	M,R		Brand name of the Home Wireless Operator WLAN service seen by the end user in the web based login page. The brand name can be used to mask the realm from the end user in web based login pages for example by utilizing a dropdown box into realm known by the network.	

Section name: WLAN Information				ID: 19	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
					This enables an operator to change its roaming realm with reduced impact to the user experience. If the operator has multiple roaming realms they have to be mapped one-to-one to brand names
WLAN Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

**7.11.24 LTE ROAMING Information**

Section name: LTE ROAMING Information				ID: 20	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
Roaming Interconnection	Diameter	N/A				
Roaming Interconnection	S6a	N/A				
Roaming Interconnection	S6d	N/A				
Roaming Interconnection	S9	N/A				
Roaming Interconnection	S8	N/A				
Diameter	IP addresses of the Diameter Edge Agent	IP address range			Public IP address of the DEA interface, belonging to one of the IP Address ranges defined into section  Id 17	



Section name: LTE ROAMING Information			ID: 20	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description
S6a	Hostnames for HSS, MME in the form which they are used in the Diameter-Origin and Diameter-Destination, Host and Realm AVPs				The Host names and REALM AVPs as defined by 3GPP TS 23.401 and TS 23.402
S6a	Is MAP interface available for connection to HSS (PMN supports MAP-IWF to HSS)?	Boolean	M	Y/N	Specifies if the InterWorking Function is available in the PMN
S6a	Is MAP interface available for connection to MME (PMN supports MAP-IWF to MME)?	Boolean	M	Y/N	Specifies if the Interworking Function is available in the PMN
S6d	Is S6d used for legacy SGSN?	Boolean	M	Y/N	Specifies if the SGSN supports the S6d Diameter interface

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
S9	Hostnames for PCRF in the form which they are used in the Diameter-Origin and Diameter-Destination, Host and Realm AVPs				The Host names and REALM AVPs as defined by 3GPP TS 23.401 and TS 23.402
S9	Is S9 used for PCC?	Boolean	M	Y/N	Specifies if Policy Control will be used within S9 interface
S8	Is GTP Interface available?	Boolean	M	Y/N	The type of protocol used for carrying payload traffic
S8	Is PMIP Interface available?	Boolean	M	Y/N	The type of protocol used for carrying payload traffic
SMS ITW	SMS Delivery Mechanism	N/A			

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
SMS Delivery Mechanism	SMS over IP	Boolean	O	Y/N	Specifies if SMS over IMS is supported in the PMN
SMS Delivery Mechanism	SMS over SGs	Boolean	O	Y/N	Specifies if SMS over SGs is supported in the PMN
Voice ITW	IMS	Boolean	O	Y/N	Specifies if VoLTE is supported in the PMN
Voice ITW	CS Fallback	Boolean	O	Y/N	Specifies if CSFB for voice is supported in the PMN
Voice ITW	Other	Boolean	O	Y/N	Specifies any other way than CSFB and VoLTE to support voice in the PMN
Roaming Retry	Is Roaming Retry Supported?	Boolean	M	Y/N	Specifies if the Roaming Retry mechanism is supported in the PMN
Home PMN Information For LTE Roaming Agreement Only	Is LTE only roaming supported?	Boolean	M	Y/N	Information for Roaming Outbound scenarios
Visited PMN Information For LTE Roaming	Is LTE only roaming supported?	Boolean	M	Y/N	Information for Roaming Inbound scenarios

Section name: LTE ROAMING Information				ID: 20	Conditionality: O	
Parent	Element Name	Format	Conditionality	Values	Description	
Agreement Only						
Home PMN Information For 2G/3G Roaming Agreement Only	Is Scenario 2 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios	
Home PMN Information For 2G/3G Roaming Agreement Only	Is Scenario 3 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios	
Visited PMN Information For 2G/3G Roaming Agreement Only	Is Scenario 2 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios	
Visited PMN Information For 2G/3G Roaming Agreement Only	Is Scenario 3 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios	
Home PMN Information for 2G/3G and LTE Roaming	Is Scenario 1 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios	

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
Agreement					
Home PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 2 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios
Home PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 3 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios
Home PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 4 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios
Visited PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 1 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
Visited PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 2 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios
Visited PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 3 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios
Visited PMN Information for 2G/3G and LTE Roaming Agreement	Is Scenario 4 supported?	Boolean	M	Y/N	Refers to PRD IR.88 for clarification on Roaming Scenarios
RILTE information	List of LTE QOS profiles	N/A	O,R		Sub-section listing the different QOS profiles with one mandatory profile for the default QOS.
List of LTE QOS profiles	Profile name	Alpha	M		Free text that could be used as a reference in AA.14.
List of LTE QOS profiles	QCI	Listed Value	M	1; 2; 3; 4; 5; 6; 7; 8; 9	Only one QCI value per profile

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
List of LTE QOS profiles	ARP	Listed Value	M	1; 2; 3; 4; 5; 6; 7; 8; 9; 10; 11; 12; 13;14;15	List of ARP values separated by comma
List of LTE QOS profiles	Pre-emption vulnerability	Numeric	M		
List of LTE QOS profiles	Pre-emption capability	Numeric	M		
List of LTE QOS profiles	Guaranteed Bit rates for uplink	Numeric	O	no drop down list 0 to 10Gbps	Mandatory for QCI = 1 to 4 Absent for QCI = 5 to 9
List of LTE QOS profiles	Guaranteed Bit rates for downlink	Numeric	O	no drop down list 0 to 10Gbps	Mandatory for QCI = 1 to 4 Absent for QCI = 5 to 9
List of LTE QOS profiles	Maximum Bit rates for uplink	Numeric	O	no drop down list 0 to 10Gbps	Mandatory for QCI = 5 to 9 Absent for QCI = 1 to 4
List of LTE QOS profiles	Maximum Bit rates for downlink	Numeric	O	no drop down list	Mandatory for QCI = 5 to 9 Absent for QCI = 1 to 4

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
				0 to 10Gbps	
RILTE information	QCI values supported	Listed Values	M	1; 2; 3; 4; 5; 6; 7; 8; 9	Repeating fields indicating one or more QCI values supported in a PMN
RILTE information	IPv6 Connectivity Information	N/A	M		Query on IPv6 connectivity support
IPv6 Connectivity Information	MME support	N/A	M		
MME support	IPv4v6 PDP Type	Boolean	M	Yes/No	Specifies if the MME supports IPv4v6 connectivity type
MME support	IPv6 PDP Type	Boolean	M	Yes/No	Specifies if the MME supports IPv6 connectivity type
IPv6 Connectivity Information	SGW support	N/A	M		
SGW support	IPv4v6 PDP Type	Boolean	M	Yes/No	Specifies if the SGW supports IPv4v6 connectivity type
SGW support	IPv6 PDP Type	Boolean	M	Yes/No	Specifies if the SGW supports IPv6 connectivity type
IPv6 Connectivity	PGW support	N/A	M		



Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
Information					
PGW support	IPv4v6 PDP Type	Boolean	M	Yes/No	Specifies if the PGW supports IPv4v6 connectivity type
PGW support	IPv6 PDP Type	Boolean	M	Yes/No	Specifies if the PGW supports IPv6 connectivity type
IP Address of IPsec GW	IP address of the first IPsec GW	IP address range	O		If Security Gateway applies, please specify proper IP Address
IP Address of IPsec GW	IP address of the second IPsec GW	IP address range	O		If Security Gateway applies, please specify proper IP Address
Certificates	Certificate of first IPsec GW	Boolean	O	Yes/No	CER definition, if applicable the certificate must be stored into the RAEX Application for distribution
Certificates	Certificate of second IPsec GW	Boolean	O	Yes/No	CER definition, if applicable the certificate must be stored into the RAEX Application for distribution
Certificates	Operator roaming sub-CA certificate	Boolean	O	Yes/No	CER definition, if applicable the certificate must be stored into the RAEX Application for

Section name: LTE ROAMING Information				ID: 20	Conditionality: O
Parent	Element Name	Format	Conditionality	Values	Description
					distribution
LTE roaming Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

### 7.11.25 Contact Information

For this section a new Format type is defined named “Contact” as represented below. It occurs in in Contact Type elements. Conditionality is defined only if “Repeating” occurs.

Format Type: Contact					
Parent	Element Name	Format	Conditionality	Values	Description
Contact	Person Name	Alpha, max 64 chars			
Contact	Tel	Tel number	R		
Contact	Fax	Tel number	R		
Contact	E-Mail	Email	R		

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Contact Information	Contact Type	Listed Values		Roaming Troubleshooting Contact Information SCCP inquiries and ordering of SS7 routes Roaming Coordinator IREG Tests TADIG Tests CAMEL Tests GPRS Contact Contact person(s) (in PMN) for GRX connectivity Contact person (in PMN) to verify authority of a GRX provider to add/modify data in Root DNS Contact person(s) for IW MMS Contact person(s) for IW SMS Contact person(s) for WLAN Other contacts	

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Contact Type	Roaming Troubleshooting Contact Information	N/A	M		
Roaming Troubleshooting Contact Information	Troubleshooting Office Information	N/A	M,R		
Troubleshooting Office Information	Location (City)	Alpha, max 64 chars	M		
Troubleshooting Office Information	Office Time Zone in UTC	UTC	M		
Troubleshooting Office Information	Office Hours	Time range	M		
Roaming Troubleshooting Contact Information	Main Contact for Troubleshooting (Office Hours)	N/A	M		

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Main Contact for Troubleshooting (Office Hours)	Team Name	Alpha, max 64 chars	M		
Main Contact for Troubleshooting (Office Hours)	Tel	Tel number	M,R		
Main Contact for Troubleshooting (Office Hours)	Fax	Tel number	M,R		
Main Contact for Troubleshooting (Office Hours)	E-Mail	Email	M,R		
Roaming Troubleshooting Contact Information	Escalation Contact for Troubleshooting	N/A	M		
Escalation Contact for Troubleshooting	Person Name	Alpha, max 64 chars	M		

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Escalation Contact for Troubleshooting	Tel	Tel number	M,R		
Escalation Contact for Troubleshooting	Fax	Tel number	M,R		
Escalation Contact for Troubleshooting	E-Mail	Email	M,R		
Roaming Troubleshooting Contact Information	24 x 7 Troubleshooting Contact (Out of Office Hours)	N/A	M		
24 x 7 Troubleshooting Contact (Out of Office Hours)	Team Name	Alpha, max 64 chars	M		

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
24 x 7 Troubleshooting Contact (Out of Office Hours)	Tel	Tel number	M,R		
24 x 7 Troubleshooting Contact (Out of Office Hours)	Fax	Tel number	M,R		
24 x 7 Troubleshooting Contact (Out of Office Hours)	E-Mail	Email	M,R		
Contact Type	SCCP inquiries and ordering of SS7 routes	Contact	M,R		



Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Contact Type	Roaming Coordinator	Contact	M,R		
Contact Type	IREG Tests	Contact	Contact Type		
Contact Type	TADIG Tests	Contact	M,R		
Contact Type	CAMEL Tests	Contact	M,R		
Contact Type	GPRS Contact	Contact	M,R		
Contact Type	Contact person(s) (in PMN) for GRX connectivity	Contact	M,R		

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Contact Type	Contact person (in PMN) to verify authority of a GRX provider to add/modify data in Root DNS	Contact	M,R		
Contact Type	Contact person(s) for IW MMS	Contact	M,R		
Contact Type	Contact person(s) for WLAN	Contact	M,R		
Other Contact	Job Title	Contact	O,R		
Job Title		Text	M		

Section name: Contact Information				ID: 21	Conditionality: C
Parent	Element Name	Format	Conditionality	Values	Description
Contact Information	Contact point (address) for distribution of updating of the roaming database	Alpha, max 256 chars	M,R		
Contact Information	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

7.11.26 Hosted Networks

Section name: Hosted Networks				ID: 22	Conditionality: O,R	
Parent	Element Name	Format	Conditionality	Values	Description	
Hosted Networks	Network	N/A	M			
Network	Name		M		Name of the Hosted network	
Network	Type		M	Terrestrial, NonTerrestrial		
Network	TADIG Code		M			
Network	Network Node	N/A	M,R			
Network Node	Node Type	Listed values	M	(U)MSC/VLR (U)SGSN	Type of the node	

Section name: Hosted Networks				ID: 22	Conditionality: O,R
Parent	Element Name	Format	Conditionality	Values	Description
Network Node	GT (E.164) Address(es)	E.164 GT Address or E.164 GT Address range	M		GT address or range of GT addresses
Network Node	MSRN Range		C,R		MSRN range Mandatory if network node is of MSC/VLR or UMSC/VLR type Else not required
Network Node	IP Address(es)	IP Address or IP Address range(s)	C		IP address or range of IP addresses are present in case of SGSN or GGSN node types
Hosted Networks	List of TADIG codes	N/A	O		List of IMSI ranges for which the section content is also applicable
List of TADIG codes	TADIG Code	Alpha, max 5 chars	M, R		TADIG code associated to MCC/MNC of the network, according TD.13

## 8 Release management

### 8.1.1 RAEX IR.21 Change Management

Changes in the RAEX IR.21 process have implications in other PRDs such as TD.81. Release Management Procedures must be aligned for all GSMA data interchange formats, in order to provide implementation time and rules for testing and migration. TADIG is the Working Group within the GSMA responsible for the specification and maintenance of data interchange formats.

Therefore, the RAEX IR.21 Release Management Process will be aligned to the document already defined and in place within the TADIG group.

The Release Management principles for RAEX IR.21 are defined in the Permanent Reference Document (PRD) TD.34

The table below summarizes the timescales for the “RAEX IR.21 Scheduled Releases” according to Section 2.1 of TD.34:

Format	Submission of Major Req's	Approval of Major Changes	Submission of Minor Req's	Approval of Minor Changes	Latest Implem. Date
RAEX IR.21	15 March 2010	15 May 2010	15 September 2010	15 November 2010	1 May 2011

### 8.1.2 RAEX IR.21 Version Control

When a new IR.21 is released, a new version of RAEX Business Requirements and related TADIG documentation will also be created and SPs will need to support a new RAEX IR.21 version. It may also occur that development of TD documents may in turn create a change to RAEX IR.21. These changes are indicated using a latest version number.

Senders and receivers of IR.21 data in the new RAEX IR.21 version will need to make a change to their systems in order to create/accept any new information being exchanged in the newer RAEX IR.21 version.

Senders will need to indicate in their IR.21 ID.3 network information, which version of RAEX IR.21 they will 'send' to and can 'receive' from their roaming partners in order for them to understand what version of RAEX IR.21 is being supported by that Operator.

For Example:

RAEX IR.21 2010 All SPs must use the most recent version of RAEX IR.21.

## Document Management

### Document History

Version	Date	Brief Description of Change	Approval Authority	Editor / Company
Draft	Dec. '92 - June '92	For EREG Discussions		
0.0.1	June 1992	For EREG Discussions		
1.0.1	June 1992	For EREG Discussions		
3.0.0	12th June 1992	Approved at MoU 20		
3.1.0		Approved at MoU 20 Note: No change to IR.21, only a new printout of the GSM Association Roaming database		
3.2.0	10 <sup>th</sup> June 1993	Approved at MoU 24 - Includes CR no.2		
3.2.1		Approved at MoU 25 - Includes CR no.3		
3.2.2		Approved at MoU 26 - Includes CR no.4		
3.3.3	18 <sup>th</sup> October 1995	Approved at MoU 32 - Includes CR no.5		
3.4.0	18 <sup>th</sup> January 1996	Approved at MoU 33 - Includes CR no.6		
3.4.1	29 <sup>th</sup> May 1996	Approved at MoU 34 - Includes CR no.7		
3.4.2	3 <sup>rd</sup> October 1996	Conversion to PRD TD.15		
3.4.3	25 <sup>th</sup> November 1996	Approved at IREG 31. Includes CR no.8, non-strategic: Removing the reference to PRD IR.22		
3.5.0	October 1999	CR# 9. PL Doc 181/99 Rev 1. Approved at Plenary 42		
3.6.0	27 <sup>th</sup> April 2000	CR#10, PL Doc 030/00 approved at Plenary 43		
3.7.0	October 2000	Approved at Plenary 44 – CRs # 11 and 12		
3.8.0	May 2002	CR IREG 016/02 rev1 addition of new field containing network's SMSC GT addresses to allow operators with MSCs that require full SMSC addresses to enter them correctly CR IREG 019/02 rev1 introduction of GPRS and GSM vendor information		
3.8.1	August 2002	CR 013 IREG Doc 107/02 rev2 approved at IREG#43. Addition of "Pingable and traceroutable IP address" field in the "GPRS Information" section, in order to facilitate GPRS roaming testing and troubleshooting.		
3.8.2	February 2003	NCR 014 IREG Doc 019/03 rev1 approved at IREG#44. Addition of a GTP version field in the "GPRS Information" section, in order to clarify the GTP version supported by the operator.		

Version	Date	Brief Description of Change	Approval Authority	Editor / Company
3.8.3	February 2003	NCR 015 IREG Doc 020/03 rev1 approved at IREG#44. Addition of MMS Information section.		
3.8.4	February 2003	NCR 016 IREG Doc 027/03 approved at IREG#44. Adding new fields to the CAP version information section, to show which CAMEL partial implementations are supported.		
3.9.0	February 2003	SCR 017 IREG Doc 029/03 Rev 1 approved at IREG#44. Adding a new section on WLAN information.		
3.9.1	February 2003	NCR 018 IREG Doc 035/03 Rev 1 approved at IREG#44 Introduction of minimum time to inform roaming partners when updating IP based services Information.		
3.9.2	August 2003	NCR 019 on the IR.21 ver.3.9.1 for addition of the Application Context in MAP		
3.9.3	August 2003	NCR 20 to IR.21 Re AAC numbers		
3.9.4	August 2003	NCR 21 on the IR.21 Ver.3.9.1 for Clarification of supporting GTP version1		
3.9.5	November 2003	NCR 024 on the IR.21 for correction of AC name in MAP		
3.9.6	November 2003	NCR 025 on the IR.21 for clarification of supporting latest version of Release		
3.9.7	May 2004	NCR 027 to IR.21 v.3.9.6		
3.9.8	October 2004	NCR 029 to IR.21 v.3.9.7 implemenation of compliance to SG.15		
3.9.9	March 2005	Three NCR to IR.21 v.3.9.8 NCR 030 : Addition of new section regarding Authentication to record compliance with SG.15 NCR 031 : Structure reorganization of Miscellaneous section NCR 032 : Provided a mechanism to detect SIM Box usage		
3.9.10	June 2005	MCR 032: Addition of MMS Hub provider information and MMS Hub provider data		
3.9.11	August 2005	NCR033: Introduction of an update interval for SMS-SC addresses MCR034: Record of A5 cipher algorithm in use by each operator		
4.0	November 2005	MCR035: Identification of operator network technology standard MCR036: New section called "IP-Roaming and IP-Interworking information" containing proper information for GRX Interworking and for Master Root DNS Server MCR037: New section for SCCP Protocol availability at PMN		
4.1	March 2007	MCR 038: GPRS Information section change and addition of fields for data service support		



Version	Date	Brief Description of Change	Approval Authority	Editor / Company
4.2	April 2007	MCR 039: New section containing MSC and VLR Time Zone information		
4.3	March 2008	MCR 046: collection of following CR MCR040: Enhancement of SMSC and CAMEL information sections MCR041: Removal of SS7 Access Solution section MCR042: Including Roaming Hubbing Information MCR043: Including USSD Information MCR044: Contact Point section review for Miscellaneous MCR045: Redesign of Auto Roam Section		
5.0	March 2008	MCR047: RAEX Business requirements and Infocentre improvements for notification procedures Editorial changes accordingly Revision of Annex A output		
5.2	July 2008	Editorial change on [Unrestricted]		
5.3	September 2008	MCR048: Revision of Annex A including new form template according xml schema Revision of IR.21 Data Dictionary Definition of Network Type Elements Removal of Technology and Frequency elements from IR21 Company logo in the output template Revision of Update Intervals Section Clarification of WLAN Roaming Signalling IP List		
5.4	March 2009	MCR049: Revision of Data Dictionary and Output Template. Changes needed after "proof of concept" analysis, to allow correct definition of operator's data MCR050: - Revision of Annex A including "Comments" field on SCCP Carrier sections - Addition of CAMEL Re-Routing number information - Addition of Dual Access column in Network Elements information		
6.0	November 2009	MCR051: Removal of Roaming Hubbing section due to introduction of PRD IR.85	IREG eVote EMC#79	Fabrizio Fiorucci / Telecom Italia, Italy
6.0	December 2009	MCR052: Addition of new section for RILTE information Addition of RAI information Editorial correction on section Id 3	IREG#57 EMC#79	Fabrizio Fiorucci / Telecom Italia, Italy

Version	Date	Brief Description of Change	Approval Authority	Editor / Company
6.1	April 2010	mCR053: Support (or not support) of multiple PDP context	Signal#48	Fabrizio Fiorucci / Telecom Italia, Italy
6.2	October 2010	MCR054: -Definition of a Release Management proposal for RAEX IR.21 -Allow Roaming Hubs and other entities to receive IR.21 by replacing "Operator" with "Service Provider" in the text -State that RAEX IR.21 process is a "Binding" process.	IREG#58 EMC#80 DAG#73	Fabrizio Fiorucci / Telecom Italia, Italy
7.0	March 2011	<b>First version of 2012 release</b> MCR057: This CR is created in order to align the latest agreement made in Packet/RILTE on 2G/3G+LTE co-existence roaming scenarios. Also, current IR.21 on LTE roaming information (name of the information, Diameter sections) needs to be updated to align the latest IR.88.	Signal#53 Packet#49 IREG#59	Itsuma Tanaka / NTT DoCoMo, Japan
7.1	May 2011	MCR059: IPv6 and IPV4IPv6 connectivity type MCR060: Support of QCI values MCR062: Introduction of RAEX process  MCR061: list of short number translation Submitted to DAG & EMC for approval	Signal#54 Packet#50 IREG#60 EMC	Laurent Dubesset/Orange France  Fabrizio Fiorucci/Telecom Italia
7.2	October 2011	MCR063: RAEX Emergency Release 1 MCR064: Integration of SE.13 information MCR065: Additional Network Node Values	Signal#55 IREG#60 EMC	Fabrizio Fiorucci/Telecom Italia  Anton Golubchy/Kyivstar  Jose Antonio Aranda/GSM A  Janet Newman/Cellular One
7.3	January 2012	MCR068: Embedded Mobile APN Transparency	Signal#57 Packet#54 IREG#61	Nina Le Kim/T-Mobile US
8.0	May 2012	MCR069: 32 Bit ASN definition	Signal#58 Packet#55 IREG#62	Fabrizio Fiorucci/TI

Version	Date	Brief Description of Change	Approval Authority	Editor / Company
8.1	July 2012	MCR071: information for Diameter inter-operator interfaces	Signal#60 IREG#62	Michele Zarri/Deutsche Telecom
8.2	July 2012	MCR075: correction in Hosted Network section MCR076: correction in Network Element Information section MCR077: correction in CAMEL Information section MCR078: conditionality definition of SE.13 fields	Signal#62 IREG eVote DAG#953	Fabrizio Fiorucci/Telecom Italia Laurent Dubusset/Orange FT
8.3	November 2012	MCR072: Network Sharing wording MCR073: ARP and Bit rates in LTE Information Section MCR074: QoS and Bit Rates in Packet Data Services Information section MCR079: Enhancements of International SCCP Gateway Section MCR080: SE.13 DB: Re-insertion of Technology and Frequency information MCR082: Simplification of IR.21 for organisations with multiple networks MCR083: Data Dictionary Correction for Camel and IP Roaming and ITW Sections	Signal#64 IREG#63	S. Dalluege/VD F DE F.Fiorucci/Telecom Italia Laurent Dubusset/Orange FT
9.0	June 2013	CR1001: foot note alignment to PRD IR.88 CR1002: description for LTE Information Section CR1003: addition of USSD Interworking	Signal#67 IREG#64	F.Fiorucci/Telecom Italia L. Dubusset/Orange FT R. Duric/Infobip

### Other Information

Type	Description
Document Owner	IREG-SIGNAL
Editor / Company	Fabrizio Fiorucci, Telecom Italia, Italy