



**Mobile Manufacturers
Forum**

Mobile Phone Base Stations EMF / Health Fact Pack



In association with



Contents

| | | |
|----|---|---|
| 1 | Introduction | 1 |
| 2 | What is a cellular system? | 2 |
| 3 | How a cellular system works | 2 |
| | Mobile phones | 2 |
| | Base station sites | 3 |
| 4 | Directivity of antenna | 4 |
| 5 | Health concerns | 4 |
| 6 | Studies and safety guidelines | 5 |
| | Demonstrating compliance with the standards | 6 |
| 7 | Site design considerations | 7 |
| 8 | Site planning applications | 8 |
| 9 | Community consultation | 8 |
| 10 | Further sources of information | 9 |
| 11 | Glossary | 9 |

1 Introduction

There has been a substantial growth in the use of mobile communication services over the last few years and this growth is expected to continue for the foreseeable future with the introduction of the 3rd Generation (3G) mobile technologies.

With this growth comes the inevitable increase in the number of base station sites, accompanied by public concern for possible impacts of these communication systems.

Therefore this document seeks to address such concerns by providing background information on the operation of mobile communication systems as well as providing answers to some of the most commonly asked questions with respect to health and safety.



2 What is a cellular system?

Mobile communication networks are divided into geographic areas called cells, each served by a base station (Figure 1). Mobile phones are the user's link to the network. The system is planned to ensure that mobile phones maintain the link with the network as users move from one cell to another.

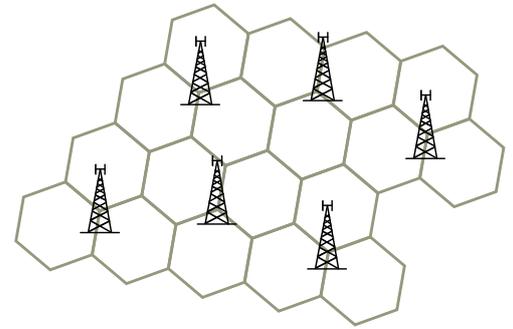


Figure 1: Theoretical modeling of a network

To communicate with each other, mobile phones and base stations exchange radio signals. The level of these signals is carefully optimized for the network to perform satisfactorily. They are also closely regulated to prevent interference with other radio systems used, for example, by emergency services, taxis as well as radio and television broadcasters.

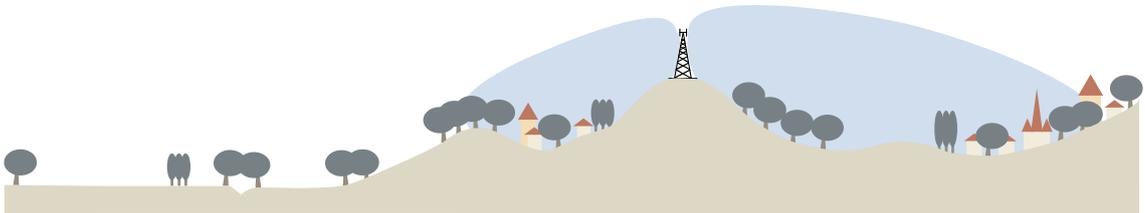


Figure 2: Example of a base station's coverage area

3 How a cellular system works

Mobile phones

When a mobile phone is switched on, it responds to specific control signals from nearby base stations. When it has found the nearest base station in the network to which it subscribes, it initiates a connection. The phone will then remain dormant, just occasionally updating with the network, until the user wishes to make a call or a call is received.

Mobile phones use automatic power control as a means of reducing the transmitted power to the minimum possible whilst maintaining good call quality. For example, while using a phone the average power output can vary between the minimum level of about 0.001 watt up to the maximum level which is less than 1 watt. This feature is designed to prolong battery life and possible talk time.

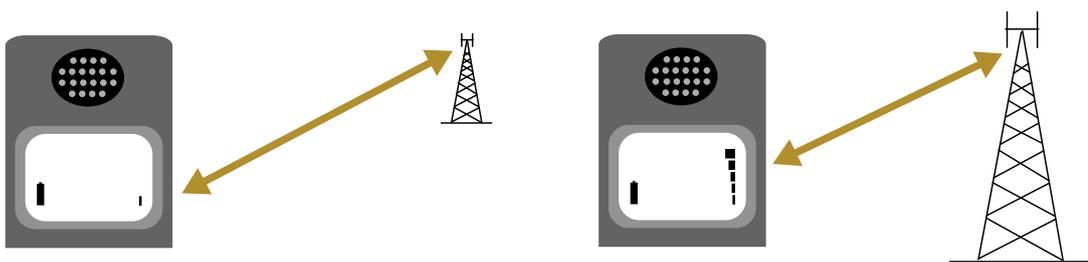


Figure 3: Signal strength is impacted by a number of factors but proximity to a base station is one of the most important.

Another aspect of a mobile network is that as the user is moving while talking, the network needs to be able to pass the call from one base station to another. This process is called a 'handover' – literally where the network hands over the call from one base station to another, and it is undertaken seamlessly and without the caller being aware of the change.

Base station sites

Transmitted power levels from base stations vary considerably depending on the required area or 'cell' that they are providing coverage for.

Typically transmitted power from an outdoor base station may range from a few watts to about 100 watts; while the output power of indoor base stations is even lower. For comparison purposes, 100 watts is equivalent to a standard light globe used in our homes.

A base station is comprised of several different components – including an equipment shelter, a tower or mast which provides the necessary height to give better coverage, and the transceivers and antennas which sit atop the tower or mast – or in some cases are attached to the top of buildings, where the building itself provides sufficient height. The antennas are typically about 15-30 cm in width and up to a few metres in length, depending on the frequency of operation.

These antennas emit Radio Frequency (RF) electromagnetic energy (also called radio waves) in beams that are typically very narrow in the vertical direction (height), but quite broad in the horizontal direction (width). Because of this, the RF energy at ground level directly below the antenna is very low.

To help assure that public exposures remain within established limits, antennas typically are elevated, and where necessary fences, or other means to restrict access are used together with appropriate signage to ensure that only authorized personnel can access the area immediately around a base station. The consequence of these measures is that in areas around base stations that are accessible to the public, the RF levels are typically many times below international safety limits.

3G mobile phone networks require more base stations than 2G mobile phone networks because 3G operates at a higher frequency where radio waves do not travel as far. The higher data rate services provided by 3G also requires more base stations and the coverage area decreases as the traffic increases. Many 3G base stations will be able to share with existing 2G base stations, however some 3G only base stations will be required.

4 Directivity of antenna

This is particularly relevant as there is a common misconception that emissions are stronger directly under antennas which partly explains some of the concern about those placed on schools or on residential buildings.

Whatever the equipment, the radio wave intensity decreases rapidly as it travels away from the antenna. In free space, the intensity decreases to a quarter when the distance is doubled. In reality, the intensity reduces much more quickly than that due to the loss of signal strength (also known as 'attenuation') that is caused by having to pass through obstacles such as trees and buildings.

Some people have asked why base station equipment is not always placed in industrial areas or areas remote from habitation. There are several reasons: firstly if the equipment is placed too far from the users it not only gives poor communication quality but also causes the phones to increase their output power to sustain the connection, thus decreasing battery life and talk time. Secondly, there are practical limitations to the geographic area that a base station can effectively serve, especially where there are high numbers of users. In this instance, the base stations need to be closer together to provide increased capacity rather than coverage, and as a result of their proximity to one another, each base station needs to operate at very low power levels to avoid interfering with others nearby. Therefore a properly designed network will optimize coverage and capacity and therefore operate at only the lowest power levels necessary to provide good communications.

5 Health concerns

RF fields are non-ionizing and do not disrupt the molecular structure of biological material. The globally recognized, independent 'International Commission on Non-Ionizing Radiation Protection' (ICNIRP) has released guidelines that provide levels of RF exposure that are regarded as safe for all members of the community.

All established health effects of RF exposure at the frequencies used for mobile communications relate to heating. So called 'non-thermal' effects have been, and are continued to be, evaluated. To date, the view of health experts is that the literature on non-thermal effects is inconsistent and its relevance to human health too uncertain for this body of information to be used as a basis for setting limits on human exposure to RF fields.

The depth to which radio waves penetrate exposed tissues is dependent on the frequency used. When radio wave energy is absorbed into our bodies, a heating effect may occur depending on the intensity of exposure. The level of heating that will occur from exposure to radio waves within the exposure guidelines is extremely low, and the body's normal thermoregulatory processes effectively dissipate any heat away that might be generated.

No confirmed study to date has shown adverse health effects at exposure levels below ICNIRP guideline levels.

6 Studies and safety guidelines

The biological effects of radio frequency electromagnetic fields have been studied for more than 50 years with over €200 million spent on research in the last decade alone.

The ICNIRP guidelines have been widely adopted internationally and turned into national safety standards. The guidelines apply to mobile phones as well as base station sites and incorporate wide safety margins to protect against all established health effects of RF exposure. There are no known adverse health effects at exposure levels below these guideline levels.

There are over 1789 peer-reviewed publications in the research database relating to the biological effects of RF fields. Included in these 1789 papers are more than 414 independent, peer reviewed studies conducted at frequencies used by mobile communications. Over half of these have looked for associations between cancer and radio waves.

Information on the various studies undertaken in this field are available from the World Health Organization (WHO) website: <http://www.who.int/peh-emf/research/database/en/>

The WHO in 2004 said:

"In the area of biological effects and medical applications of non-ionizing radiation approximately 25,000 articles have been published over the past 30 years. Despite the feeling of some people that more research needs to be done, scientific knowledge in this area is now more extensive than for most chemicals. Based on a recent in-depth review of the scientific literature, the WHO concluded that current evidence does not confirm the existence of any health consequences from exposure to low level electromagnetic fields."

Exposure guidelines have been developed by ICNIRP and are based on a careful analysis of the scientific literature (taking into account both thermal and non-thermal effects) and provide protection against all identified hazards of RF exposure with large safety margins.

The views of the industry concerning the health effects of RF exposure from mobile phones and base stations are based upon the conclusions of many expert review panels established by official national and international entities. These panels have reviewed the scientific literature over the past 10 years and have consistently concluded that there is no credible or convincing evidence that RF exposure from mobile phones or base stations operating within ICNIRP exposure limits causes any adverse human health effects.

Demonstrating compliance with the standards

Even though today's mobile phones only emit, on average, a maximum of a few hundred milli-watts, they are held in close proximity to the body and, therefore, expose the user to local levels of EMF exposure that are relatively higher than those from base stations.

The concept of Specific Absorption Rate (SAR) was introduced to quantify the amount of energy being absorbed by the body, and to demonstrate compliance with national and international safety standards.

The SAR of a phone is determined by operating the device near a model of the head or body. The model is filled with a liquid that exhibits the electrical properties of body tissues. A SAR probe is operated inside the model and a 3 dimensional measurement takes place to determine the highest SAR and verify that this is below the limit.

With respect to base station sites, the simplest RF propagation model is the 'free-space' model, whereby the intensity decreases to one quarter when the distance is doubled. As mentioned previously though, in reality, it drops much faster than that due to loss of signal strength caused by absorption in trees, buildings and the earth itself.

To measure the RF levels for compliance purposes, one takes the highest transmitted power and the maximum antenna focus, and uses both of these to calculate the RF energy levels at any given distance from an antenna. Generally, due to the height of antenna masts, the antenna focus and other factors the RF emissions from base station sites are lower than the ICNIRP guidelines. In areas accessible to the public, measurements and calculations have found that the exposure levels to be far below international guidelines, typically by a factor of 500 or more.



7 Site design considerations

During the last decade the design of mobile communications equipment has matured rapidly, with a general trend to smaller equipment offering equal or greater functionality.

The antennas of base stations have however tended to remain visible, as radio engineers can achieve optimum performance when antennas are mounted on high ground (or the top of buildings) away from physical obstruction (other buildings, trees etc).

Creative antenna and mast tower design is capable of significantly reducing the visual impact of mobile communications infrastructure equipment. Examples of some of these creative solutions are as follows:




Base station integrated into lightpole



Base station blended into building facade

Base station blended with historical building

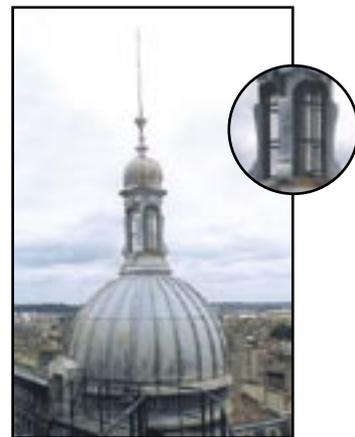

Base station blended into building facade

8 Site planning applications

It is appreciated that non-engineers having to consider applications for antenna sites frequently have to contend with a confusing array of technical information.

To assist these individuals in evaluating an application, the MMF has created a site declaration template that seeks to provide the main technical information relating to an installation in a consistent manner.

This template asks the person requesting the site to provide technical information on the RF emission levels as well as clear guidance on the compliance distance that applies and any exclusionary measures that are proposed.

The site declaration template can be downloaded from the MMF web-site <http://www.mmfai.org>

Similar tools have been developed by operators in many countries.

9 Community consultation

Despite the ever increasing use of mobile communications, the placing of communications infrastructure equipment within communities or in a visible rural location has tended to generate strong responses.



Predominately concerns relate to the landscape being spoiled, nearby property values being negatively affected and speculation that operating the equipment will lead to illness.

In some areas public feelings have been further heightened by real or perceived lack of consultation and factual information.

When considering the placement of communications infrastructure, it is suggested that;

- Community representatives are invited to view plans and are provided with independent factual information relating to health concerns.
- In areas of visual sensitivity then adoption of visually appealing solutions should be considered. It is important that the public is aware of such installations in order to avoid concerns that the equipment is being 'hidden'.
- in regions where best practice codes are in place then implementation of the requirements should be done in an open and transparent manner.

Sensibly designed equipment deployed after open consultation is more likely to meet the demands of the public, operators and local authorities and minimize unnecessary delays and concerns.

10 Further sources of information

- 1 **ICNIRP Guidelines on limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz).** <http://www.icnirp.de/documents/emfgdl.pdf>
- 2 **World Health Organisation International EMF Project.** <http://www.who.int/peh-emf>
- 3 **L'Agence Française de Sécurité Sanitaire Environnementale (AFSSE).**
<http://www.afsse.fr/afsse1024/etude.php>
- 4 **UK Health Protection Agency - Electromagnetic Fields.**
http://www.hpa.org.uk/radiation/understand/radiation_topics/emf/index.htm
- 5 **La Asociación Española Contra el Cáncer - Campos Electromagnéticos Y Cáncer Preguntas Y Respuestas.**
<http://www.todocancer.com/ESP/Informacion+Corporativa/Publicaciones/Otros Campos+Electromagneticos.htm>
- 6 **Report of the Health Council of the Netherlands.** <http://www.gr.nl>
- 7 **Australian Radiation Protection and Nuclear Safety Agency (ARPANSA).**
<http://www.arpansa.gov.au/>
- 8 **Council of the European Union Recommendation of 12 July 1999 on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz) (1999/519/EC).**
http://europa.eu.int/eur-lex/pri/en/oj/dat/1999/l_199/l_19919990730en00590070.pdf
- 9 **Professor John Moulder – Mobile Telephony and Human Health FAQ.**
<http://www.mcw.edu/gcrc/cop/cell-phone-health-FAQ/toc.html>
- 10 **The Wireless Information Resource Centre (WIRC) of Canada.** <http://www.wirc.org>

11 Glossary

Definitions

Often one of the biggest barriers to understanding is the terminology used by the media, scientists and engineers. The following are useful to know:

| | |
|----------------------------|---|
| 2G | 2G , the Second Generation of mobile communications systems, is the technology currently used in the operation of mobile phones. |
| 3G | 3G , or Third Generation , is the generic term used for the next generation of mobile communications systems. The new systems will enhance the services available today and offer multimedia and internet access and the ability to view video footage. |
| Aerial; Antenna | A device from which radio waves are transmitted and received. There are different designs in operation. A metallic rod or wire for sending and receiving radio waves or microwaves. |
| Analogue | First mobile phone technology which was phased out in favour of Second Generation digital technology. |

| | |
|--|---|
| ANSI | American National Standards Institute. |
| Bluetooth | Based on a low-cost, short-range radio link, Bluetooth technology can connect many types of digital devices without a single cable in sight, giving more freedom to roam. |
| Cabin | A structure which protects Transmitters and receivers from damage. They can be in the form of large Cabins or smaller cabinets. |
| Cell | A geographic area of coverage that a Radio Base Stations covers. |
| Electromagnetic Waves; Fields; Electric Field | <p>Electromagnetic waves are emitted by many natural and man-made sources and play a very important part in our lives. Electromagnetic waves are used to transmit and receive signals from mobiles phones and their base stations. The type of electromagnetic waves mobile phones use is called radio frequency (RF) waves/fields.</p> <p>A field of force surrounding a charged body or associated with a fluctuating magnetic field, with which charged particles interact.</p> |
| EMC | Electromagnetic compatibility. |
| EMF | Electromagnetic fields . |
| ETSI | European Telecommunications Standards Institute. |
| Far Field | The area extending from an antenna where the electric fields and the magnetic fields are in phase with each other and are related by the characteristic impedance of free space. |
| FCC | Federal Communications Commission (USA). |
| Feeder cable | The co-axial cable which connects an antenna to a base station transmitter or receiver. |
| Field Strength | The amplitude of the electric or magnetic fields . Related to the Power density through the impedance of free space. |
| Frequency | Frequency is the number of times per second at which an electromagnetic wave oscillates. It determines the wave's properties and usage. Frequencies are measured in hertz (Hz). 1 Hz is one oscillation per second, 1 kHz a thousand, 1 MHz is a million and 1GHz is a thousand million. Frequencies between 30 kHz and 300 GHz are widely used for telecommunication, including broadcast radio and television, and comprise the radio frequency band. Mobile telephone systems currently operate at 900MHz and 1800MHz. |

| | |
|------------------------------|--|
| GSM | GSM (Global System for Mobile communications) is a world standard digital communications technology. |
| IARC | International Agency for Research on Cancer (IARC). |
| ICNIRP | The International Commission on Non- ionizing Radiation Protection (ICNIRP) is an independent scientific body which has produced an international set of guidelines for public exposure to radio frequency waves. These guidelines were recommended in the Stewart Report and adopted by the Government, replacing the National Radiological Protection Board (NRPB) guidelines. |
| IEC | International Electrotechnical Commission. |
| IEEE | Institute of Electrical and Electronics Engineers. |
| Intentional Radiators | Intentional radiators are designed to radiate EMF and the levels they emit are strictly controlled by EMC and EMF guidelines. |
| Ionizing | A process in which an atom or molecule loses or gains electrons, acquiring an electric charge or changing an existing charge. |
| Macrocell | A macrocell provides the largest area of coverage within a mobile network. The antennas for macrocells can be mounted on ground-based masts , rooftops or other existing structures. They must be positioned at a height that is not obstructed by terrain or buildings. Macrocells provide radio coverage over varying distances depending on the frequency used, the number of calls made and the physical terrain. Macrocell base stations have a typical power output in tens of watts. |
| Mast | A ground-based structure that supports antennas at a height where they can satisfactorily send and receive radio waves. A typical mast is 15m high, and of steel lattice or tubular steel construction. New slimmer versions of masts are now available which can be painted to blend in with their surroundings, disguised as trees or used in conjunction with street lighting and CCTV cameras. Masts themselves play no part in the transmission of the radio waves. |

| | |
|--------------------------------------|--|
| Maximum Ground Level Emission | Maximum Ground Level Emission or the beam of highest intensity usually occurs between 50m and 200m from an antenna. The ground level emission within this area is the highest circling a base station. It is usually many thousands of times lower than international public exposure guidelines. Emission levels reduce rapidly as the distance increases from the antenna . The highest emissions levels are directly in front of the antenna . |
| Microcell | Microcells provide additional coverage and capacity where there are high numbers of users within urban and suburban macrocells . The antennas for microcells are mounted at street level, typically on the external walls of existing structures, lamp-posts and other street furniture. Microcell antennas are smaller than macrocell antennas and when mounted on existing structures can often be disguised as building features. Microcells provide radio coverage over distances, typically between 300m and 1000m and have lower output powers compared to macrocells , usually a few watts. |
| NCRP | National Council on Radiation Protection and Measurements. |
| Near Field | The near field is the region close to an antenna , where the electric and magnetic fields are not related to each other solely by the characteristic impedance of free space. |
| NRPB | The National Radiological Protection Board (NRPB) has two main functions: to advance knowledge about the protection of mankind from radiation hazards and to provide information and advice to persons in the UK with responsibilities relating to protection from radiation hazards. The NRPB has produced a set of national guidelines for public exposure to Radio Frequency waves. These have the same scientific foundation as the ICNIRP guidelines. |
| Picocell | A picocell provides more localised coverage than a microcell . These are normally found inside buildings where coverage is poor or where there are a high number of users such as airport terminals, train stations or shopping centres. |
| Power Density | The energy flowing from an antenna through a unit area normal to the direction of propagation in a unit time. This is measured in watts per square metre. |
| Radio Base Station | A radio base station is a macrocell , microcell or picocell site and consists of transmitters and receivers in a cabin or cabinet connected to antennas by feeder cable . |
| RF | Radio Frequency . |

| | |
|-------------------------------------|--|
| SAR | SAR (Specific Absorption Rate) is a measure of the amount of RF power absorbed in any part of the human body due to the use of equipment such as mobile phones or by human exposure close to other transmitting sources. |
| Second Generation | See 2G . |
| Sectored Antenna | Antenna which transmits or receives higher signal levels in a horizontal direction. The base station is split into several sectors (typically 3 or 6) to provide 360 degree coverage. |
| Stub Mast | A roof-mounted mast structure which supports multiple antennas at a height where it can satisfactorily send and receive radio waves. A stub mast is typically 4m – 6m high and of steel lattice construction. Stub masts themselves play no part in the transmission of radio waves. |
| TETRA | TErrestrial Trunked RA dio, typically used by utilities and emergency services. |
| Third Generation | See 3G . |
| Total Band Exposure Quotient | The sum of the frequency exposure quotients of all the bands at a single location. |
| Transmitter | Electronic equipment that generates radio frequency electromagnetic energy and is connected to an antenna via a feeder cable . |
| UMTS | Universal Mobile Telecommunication System (UMTS) is part of the international vision of a global family of third generation mobile communication systems. Some countries refer to this as 3G. |
| Unintentional Radiators | Unintentional radiators are not designed to radiate EMF . Any EMF they do emit are controlled by EMC guidelines. |
| Wavelength | Wavelength is the distance in metres between any two 'similar' points on a radio wave. This portion of the wave is referred to as one complete cycle. The lower the frequency of a wave the longer the wavelength . |
| WLAN | Wireless local area network (WLAN) is a low power radio technology which provides special zones for accessing a local area network over a short range, for instance at airports or hotels. |
| WMAN | Wireless metropolitan area network (WMAN) is providing wireless connection for broadband or multimedia users over a medium range, for instance covering small urban areas. |



Mobile Manufacturers Forum

Diamant Building
80 Boulevard A. Reyers
B-1030 Brussels, Belgium
Telephone +32 2 706 8567 • **Fax** +32 2 706 8569
Internet www.mmfai.org



Block 2, Deansgrange Business Park
Deansgrange, Co Dublin, Ireland
Telephone +353 1 289 1800 • **Fax** +353 1 289 1551
Internet www.gsmworld.com