



RSP Architecture
Version 2.0
23 August 2016

This is a Non-binding Permanent Reference Document of the GSMA

Security Classification: Non-confidential

Access to and distribution of this document is restricted to the persons permitted by the security classification. This document is confidential to the Association and is subject to copyright protection. This document is to be used only for the purposes for which it has been supplied and information contained in it must not be disclosed or in any other way made available, in whole or in part, to persons other than those permitted under the security classification without the prior written approval of the Association.

Copyright Notice

Copyright © 2016 GSM Association

Disclaimer

The GSM Association ("Association") makes no representation, warranty or undertaking (express or implied) with respect to and does not accept any responsibility for, and hereby disclaims liability for the accuracy or completeness or timeliness of the information contained in this document. The information contained in this document may be subject to change without prior notice.

Antitrust Notice

The information contained herein is in full compliance with the GSM Association's antitrust compliance policy.

Table of Contents

1	Introduction	5
1.1	Overview	5
1.2	Scope	5
1.3	Intended Audience	5
1.4	Definition of Terms	5
1.5	Abbreviations	10
1.6	References	12
1.7	Conventions	13
2	Principles	13
2.1	Basic Principles	13
2.2	Profile Principles	14
3	Roles	14
3.1	eUICC Manufacturer	14
3.2	Device Manufacturer	15
3.3	Operator and Service Provider	15
3.4	Subscriber and End User	15
3.5	Certificate Issuer	16
4	Remote SIM Provisioning System Architecture	17
4.1	eUICC Architecture	17
4.1.1	eUICC Architecture Overview	17
4.1.1.1	ECASD	18
4.1.1.2	ISD-R	18
4.1.1.3	ISD-P	18
4.1.1.4	MNO-SD	19
4.1.1.5	Profile Policy Enabler	19
4.1.1.6	Telecom Framework	19
4.1.1.7	Profile Package Interpreter	19
4.1.1.8	LPA Services	19
4.2	eUICC Requirements	19
4.3	eUICC Eligibility Check	22
4.3.1	eUICC Eligibility Check Requirements	22
4.4	Device Requirements	23
4.4.1	Device Capability Requirements	24
4.5	Device Initiated Requirements	24
4.5.1	Device Reset	24
4.5.2	eUICC Memory Reset	24
4.5.3	eUICC Test Memory Reset	25
4.6	Profile Requirements	25
4.6.1	Test Profiles	25
4.6.2	Provisioning Profile	26
4.7	Metadata Requirements	26
4.8	NFC Requirements	27

4.9 Subscription Manager Data Preparation + (SM-DP+)	27
4.9.1 SM-DP+ Overview	27
4.9.2 SM-DP+ Requirements	28
4.9.3 Default SM-DP+ Address on the eUICC	31
4.10 Local Profile Assistant (LPA)	31
4.10.1 LPA Overview	32
4.10.2 Operational LPA Modes	32
4.10.2.1 LPA in the eUICC	33
4.10.2.2 LPA in the Device	33
4.10.3 LPA Requirements	34
4.10.4 LDS Requirements	38
4.11 Subscription Manager – Discovery Service (SM-DS)	38
4.11.1 SM-DS Overview	38
4.11.2 SM-DS Implementation	39
4.11.3 SM-DS Implementation Guidelines	40
4.11.4 SM-DS functions	40
4.11.5 SM-DS Requirements	41
4.11.6 Event Registration/Deletion Procedure	43
4.11.7 Discovery Request Procedure	44
4.12 Interfaces	45
4.12.1 Operator – SM-DP+ (ES2+)	45
4.12.2 Operator – End User (ESop)	46
4.12.3 End User - LUI (ESeu)	46
4.12.4 Operator – eUICC (ES6)	46
4.12.5 SM-DP+ – LPA in the eUICC (ES5+)	46
4.12.6 SM-DP+ – LPD in the Device (ES9+)	46
4.12.7 SM-DP+ – eUICC (ES8+)	46
4.12.8 SM-DP+ – SM-DS (ES12)	46
4.12.9 LDS – SM-DS (ES11)	46
4.12.10 EUM – eUICC (ESeum)	47
4.12.11 LDS – LPA Services (ES10a)	47
4.12.12 LPD – LPA Services (ES10b)	47
4.12.13 LUI – LPA Services (ES10c)	47
4.12.14 SM-DS – SM-DS (ES15)	47
4.12.15 Device – SM-DP+ (Established Connection)	47
4.12.16 General Interface Requirements	48
4.13 Profile Policy Management	49
4.13.1 Introduction	49
4.13.2 Profile Policy Management Requirements	49
4.13.3 Policy Rules	50
4.13.4 Profile Policy Enabler Requirements	50
4.14 Certification	51
4.14.1 eUICC Certification	51
4.14.2 Device Compliance	52
4.14.3 SM-DP+ Certification	52

4.14.4	SM-DS Certification	53
4.14.5	LPA Certification	53
4.14.6	Public Key Certificates Management	53
5	Operational Procedures	54
5.1	LPA Initiated Download	54
5.1.1	LPA Initiated Download Requirements	54
5.1.2	LPA Initiated Download Procedure	54
5.2	Profile Download with Activation Code	57
5.2.1	Activation Code Requirements	57
5.2.2	Profile Download with Activation Code Procedure	58
5.3	Local Profile Management	60
5.3.1	Local Profile Management Procedures	60
5.3.1.1	Enable Profile	61
5.3.1.2	Disable Profile	62
5.3.1.3	Delete Profile	63
5.3.1.4	Add/Update Profile Nickname	64
5.3.1.5	Query Profile Metadata	65
5.3.1.6	eUICC Memory Reset	66
5.3.1.7	Add Profile with Activation Code	67
5.3.1.8	Edit SM-DP+ Address	68
Annex A	Security Threats, Risks and Creation Process Requirements (Informative)	69
Annex B	Profile Production Procedure (Informative)	73
B.1	Profile Production Procedure	73
B.1.1	Profile Description Definition	74
B.1.2	Operator Credentials Generation	74
B.1.3	Protected Profile Package Generation	75
B.1.4	Contract Conclusion and Link Profile	77
B.1.4.1	Activation Code with Known EID	78
B.1.4.2	Activation Code with Unknown EID	79
B.1.4.3	Activation Code with EID Provided to the Operator	80
Annex C	Local Profile Management Operations implementation (Informative)	82
Annex D	eUICC Categories (Normative)	83
D.1	eUICC Requirement	83
Annex E	LPA Settings (Informative)	84
Annex F	Certifications Chain and Security Model	85
F.1	Security Model	85
Annex G	LPA Integrity	92
Annex H	Rules Authorisation Table (Normative)	93
Annex I	Document Management	94
I.1	Document History	94
	Other Information	94

1 Introduction

1.1 Overview

This document provides an architecture approach as a proposed solution for the Remote SIM Provisioning of Devices across all markets.

The main goal of the Architecture is to define a mechanism for the Remote SIM Provisioning of Devices with the necessary credentials to gain mobile network access.

This version focuses on Devices for the consumer market.

Please note that SGP.21 V1.0 [31] has not been deprecated.

1.2 Scope

The aim of this document is to define a common architecture framework to enable the Remote SIM Provisioning and management of the Embedded UICC (eUICC) in Devices. The adoption of this architecture framework will aim to provide the basis for ensuring global interoperability for Remote SIM Provisioning between Operators in different deployment scenarios.

1.3 Intended Audience

Technical experts working within Operators, SIM solution providers, Device vendors, standards organisations, network infrastructure vendors, Service Providers and other industry bodies.

1.4 Definition of Terms

Term	Description
Activation Code	Information issued by an Operator/Service Provider to an End User. It is used by the End User to request for the download and installation of a Profile.
Activation Code Token	A part of the Activation Code information provided by the Operator/Service Provider to reference a Subscription.
Alternative SM-DS	SM-DS used in cascade mode with a Root SM-DS to redirect Event Registration from a SM-DP+ to the Root SM-DS.
Authenticated Confirmation	Describes a mechanism for which the End User is confirming their action through a method involving the input of personalised information (e.g. PIN, fingerprint).
Bound Profile Package	A Protected Profile Package which has been encrypted for a target eUICC.
Certificate or Public Key Certificate	A certificate as defined in RFC.5280 [1] and GlobalPlatform specifications [11].
Certified eUICC	An eUICC meeting the GSMA requirements for Remote SIM Provisioning and certified according to a GSMA eUICC protection Profile.
Companion Device	A Device that relies on the capabilities of a Primary Device for the purpose of Remote SIM Provisioning.

Term	Description
Confirmation Code	A code entered by an End User to authorise the usage of an Activation Code to confirm the download and installation of a Profile.
Confirmation Code Required Flag	A parameter to indicate whether the Confirmation Code is required or not.
Confirmation Level	Refers to the hierarchy of User Intent and Confirmation Request, where: <ul style="list-style-type: none"> • User Intent is the first and lowest level • Simple Confirmation is the second level • Authenticated Confirmation is the third and highest level Note: For examples of implementation, please refer to Annex C.
Confirmation Request	Describes a request for Authenticated Confirmation or a Simple Confirmation as defined in this specification.
Device	User equipment used in conjunction with an eUICC to connect to a mobile network. E.g. a tablet, wearable, smartphone or handset.
Device Manufacturer	An entity responsible for manufacturing Devices. The Device Manufacturer MAY be responsible for the selection and insertion of eUICCs in Devices.
Device Test Mode	A mode hidden to the End User and intended to be used by maintenance people. It allows access and use of the Test Profiles.
Disabled Profile	Profile, the files and/or applications (e.g. NAA) of which are not selectable over the UICC-Device interface.
Discovery Request	An interrogation of the Discovery Service by a Device for Event Records that are registered for its eUICC.
Embedded UICC (eUICC)	UICC which enables the secure remote and/or local management of Profiles.
Enabled Profile	Profile, the files and/or applications (e.g. NAA) of which are selectable over the UICC-Device interface. 0
Enabling Configuration File	A file whose content determines the ability of a Profile Owner to make use of Profile Policy Rules.
End User	The person using the Device.
End User Data	Information that pertains to the identity of an End User e.g. personal details, name, address, biometric characteristics, assigned identification numbers, etc.
eUICC Audit	Function that enables a SM-DP+ to check certain information related to the eUICC and its installed Profiles.
eUICC Authorisation	Token used by the SM-DS to authenticate the eUICC.
eUICC Certificate	A Certificate issued by the EUM for a specific eUICC. This Certificate can be verified using the EUM Certificate.
eUICC Eligibility Check Information	The information set sent from the eUICC to the SM-DP+ to allow eligibility checks.
eUICC Manufacturer	The eUICC Manufacturer provides eUICC products.

Term	Description
eUICC Memory Reset	An action that returns the eUICC to a state equivalent to a Factory State.
eUICC Test Memory Reset	An action that returns the eUICC to the state prior to installation of any post-issuance Test Profile.
EUM Certificate	A Certificate issued by a GSMA CI to a GSMA accredited EUM which can be used to verify eUICC Certificates.
Event	A Profile download which is set by an SM-DP+ on behalf of an Operator, to be processed by a specific eUICC.
Event-ID	Unique identifier of an Event for a specific EID generated by the SM-DP+.
Event Record	The set of information stored on the SM-DS for a specific Event, via the Event Registration procedure. This information consists of either: <ul style="list-style-type: none"> the Event-ID, EID, and SM-DP+ address or the Event-ID, EID, and SM-DS address
Event Record Query	A query to the SM-DS (Root or Alternative) executed to verify Event Registration success or determine that an Event Record still exists.
Event Registration	A process notifying the SM-DS on the availability of information on either a specific SM-DP+ or a specific SM-DS for a specific eUICC.
Factory State	The configured state of the eUICC at the point it was distributed after manufacture.
Form Factor	Physical manifestation of the UICC.
GSMA Certificate Issuer	A Certificate Authority accredited/approved by GSMA.
ICCID	Unique number to identify a Profile in an eUICC as defined by ITU-T E.118 0. Note: the ICCID throughout this specification is used to identify the Profile.
International Mobile Subscriber Identity	Refer to 3GPP 21.905 [4].
Link Profile	The process that associates a Protected Profile Package with a specific eUICC so that a Profile Download including Bound Profile Package generation can be triggered. Note: This is normally an offline process, binding is an online process happening during the communication between the SM-DP+ and the eUICC.
Local Profile Assistant	The Local Profile Assistant (LPA) describes the entity comprising of the Local User Interface (LUI), the Local Profile Download (LPD) and the Local Discovery Service (LDS).
Local Profile Management	Local Profile Management are operations that are locally initiated on the ESeu interface.
Local Profile Management Operation	Local Profile Management Operations are enable Profile, disable Profile, delete Profile, query Profile Metadata, eUICC Memory Reset, eUICC Test Memory Reset, edit nickname, add Profile, and edit default SM-DP+ address.

Term	Description
LPA Integrity	Assurance that the LPA has not been compromised or otherwise affected. The assurance SHALL be provided to the various Remote SIM Provisioning entities to ensure that the LPA can be trusted to execute the actions requested Note: This could be linked with a certification process.
LPA Mode	Defines the Operation LPA Mode which is either LPA in the eUICC or in the Device.
Metadata	Information pertaining to a Profile that is stored in the eUICC and is accessible by the LPA for the purpose of Local Profile Management.
Mobile Network Operator	An entity providing access capability and communication services to its Subscribers through a mobile network infrastructure.
Mobile Virtual Network Operator	An entity providing access capability and communication services to its Subscribers through a mobile network infrastructure but does not have an allocation of spectrum.
Multi-Factor Authentication (MFA)	A method of authentication in which an End User is only granted access after successfully presenting several separate pieces of evidence to an authentication mechanism – typically at least two of the following categories: knowledge (something they know), possession (something they have), and inherence (something they are).
Network Access Application	Refer to 3GPP 21.905 [4].
Network Access Credentials	Data required to authenticate to an ITU E.212 [5] network. This MAY include data such as Ki/K and IMSI stored within a NAA.
NFC Device	Device with NFC capability.
NFC eUICC	eUICC with NFC capability.
Nonce	An arbitrary random number generated for one time use, employed for cryptographic communication.
Notification	A report about a Profile download or Remote/Local Profile Management Operation processed by the eUICC.
Operational Profile	A Profile that allows connectivity to a mobile network.
Operator	A Mobile Network Operator or Mobile Virtual Network Operator; a company providing wireless cellular network services.
Operator Credentials	A set of credentials owned by the Operator, including Network Access Credentials, OTA Keys for Remote File/Application management, and authentication algorithm parameters.
OTA Keys	The credentials included in the Profile used in conjunction with OTA Platforms.
OTA Platform	A platform used by an Operator for the Remote File/Application management of enabled Operational Profiles on eUICCs.
Policy	Principles reflected in a set of rules that governs the behaviour of the eUICC and/or entities involved in the remote management of the eUICC.
Policy Enforcement	A function that executes Policy Rules to implement a Policy.

Term	Description
Policy Rule	Defines the atomic action of a Policy and the conditions under which it is executed.
Primary Device	A Device that can be used to provide some capabilities to a Companion Device for the purpose of Remote SIM Provisioning.
Profile	A combination of Operator data and applications to be provisioned on to an eUICC for the purposes of providing services by the Operator. The Profile SHALL be in support of a Subscription with the relevant Operator. Applications MAY be included to provide non-telecommunication services.
Profile Description	The description of a Profile in a format specific to the Operator; example formats could be an Excel table, xml format, or plain text.
Profile Management	A combination of local and remote management operations (enable Profile, disable Profile, delete Profile, and query Profile Metadata)
Profile Owner	The Operator identified by the IMSI in the Profile.
Profile Package	A personalised Profile using an interoperable description format that is transmitted to an eUICC to load and install a Profile [6].
Profile Policy Enabler	The functional element within the Profile management system that interprets and enforces Profile Policy Rules.
Profile Policy Management	A policy control system that allows the Service Provider to implement, manage and enforce its subscription terms and conditions associated with the installed Profile.
Profile Policy Rule	Defines the condition of the policy and the atomic action to be taken by the Profile Policy Enabler.
Protected Profile Package	A Profile Package which has been encrypted for storage but not to a specific eUICC.
Provisioning Profile	A Profile that allows connectivity to a mobile network solely to provide the provisioning of Profiles.
Remote SIM Provisioning	The downloading, installing, enabling, disabling, switching, and deleting of a Profile on an eUICC.
Root Certificate	A Certificate used to authenticate other entities within the Remote SIM Provisioning framework.
Root SM-DS	A globally identified central access point for finding Events from one or more SM-DP+(s).
Service Provider	The Service Provider provides Subscriptions to Subscribers either as part of an Operator or as a party with a wholesale agreement with an Operator. The Service Provider could also be the Operator.
Simple Confirmation	Describes a mechanism for which the End User is confirming their action through a confirmation (e.g yes or no).
SM-DP+ Certificate	A Certificate issued by a GSMA CI to a GSMA accredited SM-DP+.
SM-DS Certificate	A Certificate used by a GSMA CI to a GSMA accredited SM-DS.
SMDPid	Identifier of the SM-DP+ that is globally unique and is included as part of the SM-DP+ Certificate.

Term	Description
Subscriber	An entity (associated with one or more users) that is engaged in a Subscription with an Operator. The Subscriber is allowed to subscribe and unsubscribe to services, as well as register an End User or a list of End Users authorised to use these services.
Subscriber Data	Information that pertains to the identity of a Subscriber such as contract details, authentication credentials, cryptographic keys etc. Note: In many instances, the Subscriber is also the End User and therefore Subscriber Data is likely to include End User Data.
Subscription	A Subscription describes the commercial relationship between the Subscriber and the Service Provider.
Subscription Manager Data Preparation+ (SM-DP+)	This role prepares Profile Packages, secures each with a Profile protection key, stores Profile protection keys in a secure manner as well as the Protected Profile Packages in a Profile Package repository, and links the Protected Profile Packages to specified EIDs. The SM-DP+ binds Protected Profile Packages to the respective EID and securely downloads these Bound Profile Packages to the LPA of the respective eUICC.
Subscription Manager Discovery Server (SM-DS)	This is responsible for providing addresses of one or more SM-DP+(s) to a LDS.
Test Profile	A Profile which when installed on an eUICC enables access to test equipment for the purpose of testing the Device and the eUICC. This will not include any Operator Credentials.
Trusted Path	According to NIST SP 800-53r4 0, a mechanism by which an End User (through an input Device) can communicate directly with the security functions of the information system with the necessary confidence to support the system security policy. This mechanism can only be activated by the End User or the security functions of the information system and cannot be imitated by untrusted software.
User Intent	Describes the direct, real time acquisition of the manual End User input on the LUI to trigger locally a Profile download or Profile Management operation.

1.5 Abbreviations

Abbreviation	Description
AC	Activation Code
ARA-M	Access Rule Application - Master
ARF	Access Rule File
AuC	Authentication Centre
BSS	Business Support Services
CI	Certificate Issuer
DNSCurve	Domain Name System Curve
DNSSEC	Domain Name System Security Extensions

Abbreviation	Description
ECASD	eUICC Certificate Authority Security Domain
EID	Embedded UICC Identifier
eSVN	embedded Specification Version Number
ETSI	European Telecommunications Standards Institute
eUICC	Embedded UICC
EUM	eUICC Manufacturer
FASG	Fraud and Security Group
FFS	For Further Study
GSMA	GSM Association
GSMA CI	GSMA Certificate Issuer
HLR	Home Location Register
HTTP	Hypertext Transfer Protocol
ICCID	Integrated Circuit Card Identifier
IMSI	International Mobile Subscriber Identity
ISD-P	Issuer Security Domain - Profile
ISD-R	Issuer Security Domain - Root
ISIM	IP Multimedia Services Identity Module
ITU	International Telecoms Union
LDS	Local Discovery Service
LPA	Local Profile Assistant
LPD	Local Profile Download
LUI	Local User Interface
M4M	Mifare4Mobile
MFA	Multi-Factor Authentication
MNO	Mobile Network Operator
MNO-SD	Mobile Network Operator - Security Domain
MSISDN	Mobile Subscriber International Subscriber Directory Number
NAA	Network Access Application
OS	Operating System
OTA	Over The Air
PFS	Perfect Forward Secrecy
RAM	Remote Application Management
RAT	Rules Authorisation Table
RFM	Remote File Management
SAS	Security Accreditation Scheme
SD	Security Domain
SIM	Subscriber Identity Module
SM-DP+	Subscription Manager - Data Preparation +

Abbreviation	Description
SM-DS	Subscription Manager - Discovery Server
SSD	Supplementary Secure Domain
USIM	Universal Subscriber Identity Module

1.6 References

Ref	Document Number	Title
[1]	RFC 5280	X.509 Public Key Infrastructure Certificate and Certificate Revocation List (CRL) Profile
[2]	ETSI TS 102 221	UICC-Terminal interface; Physical and logical characteristics
[3]	ETSI TS 102 671	Smart cards; Machine to Machine UICC; Physical and logical characteristics
[4]	3GPP 21.905	Technical Specification Group Services and System Aspects; Vocabulary for 3GPP Specifications
[5]	ITU E.212	The international identification plan for public networks and Subscriptions
[6]	SIMAPP	SIMalliance: eUICC Profile Package - Interoperable Format Technical Specification http://simalliance.org/euicc/euicc-technical-releases/
[7]	ETSI TS 102 226	Remote APDU structure for UICC based applications
[8]	RFC 2119	"Key words for use in RFCs to Indicate Requirement Levels", S. Bradner http://www.ietf.org/rfc/rfc2119.txt
[9]	3GPP TS 21.133	3G security; Security threats and requirements
[10]	SGP.02	GSMA Remote SIM Provisioning of Embedded UICC Technical specification
[11]	GPC_SPE_034	GlobalPlatform Card Specification with its Amendments
[12]	3GPP TS 35.231	Specification of the TUAk Algorithm Set; Document 1: Algorithm Specification
[13]	3GPP TS 35.205	Specification of the MILENAGE Algorithm Set; Document 1: General
[14]	3GPP TS 35.206	Specification of the MILENAGE Algorithm Set; Document 2: Algorithm Specification
[15]	EUM SAS	FS.04 - Security Accreditation Scheme for UICC Production – Standard
[16]	SM-DP SAS	FS.08 - GSMA SAS Standard for Subscription Manager Roles
[17]	ETSI TS 103 383	Smart Cards; Embedded UICC; Requirements Specification
[18]	ITU-T E.118	The International Telecommunication Charge Card
[19]	3GPP TS 31.102	Characteristics of the Universal Subscriber Identity Module (USIM) application

Ref	Document Number	Title
[20]	GPD_SPE_013	GlobalPlatform Device Technology Secure Element Access Control - Version 1.1
[21]	3GPP TS 22.022	Personalisation of Mobile Equipment - Mobile functionality specification
[22]	TS.26	GSMA NFC Handset Requirements
[23]	NIST SP 800-53r4	Security and Privacy Controls for Federal Information Systems and Organisations – Revision 4
[24]	OMAPI	SIMalliance Open Mobile API Specification
[25]	SGP.03	NFC UICC Requirements Specification V6.1
[26]	GPS_SPE_013	GlobalPlatform Device Technology – Secure Element Access Control
[27]	WAG UAProf	Wireless Application Protocol WAP-248-UAProf-20011020-a
[28]	SGP.05	Embedded UICC Protection Profile
[29]	SGP.07	GSMA SAS Standard for Subscription Manager Roles - Version 1.0 or later
[30]	SGP.21	SGP.21 Architecture Specification - Version 1.0
[31]	SGP.22	SGP.22 Technical Specification - Version 2.0

1.7 Conventions

The key words “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in RFC2119 [8].

“FFS” or “For Further Study” means that it will be covered in SGP.22 V2.1.

2 Principles

This section contains the principles related to the GSMA Remote SIM Provisioning system for the Embedded UICC.

The solution based on the requirements described within this document has to be provided in a non-discriminatory manner.

2.1 Basic Principles

Principle no.	Description
BAS1	Existing standards and specifications SHALL be used where possible for the specification of the eUICC and related provisioning systems.
BAS2	GlobalPlatform specifications SHALL be used as a framework of choice for the implementation of the eUICC.
BAS3	The overall security of the eUICC in combination with the related management processes SHALL at all times and under all circumstances be at least equivalent to the current removable UICC and its provisioning processes.

Principle no.	Description
BAS4	The architecture of the eUICC and its Remote SIM Provisioning system SHALL comply with the requirements of 3GPP TS 21.133 [9].
BAS5	The architecture SHALL support a level of security with respect to the protection of Operator Credentials which is at least equivalent to the present levels of security. This applies in particular to: <ul style="list-style-type: none"> the confidentiality of cryptographic keys and authentication parameters ; the integrity of Subscriber identities (e.g. IMSI).
BAS6	The architecture SHALL support a level of security for all Profile content which is at least equivalent to the current state of the art level of security of the UICC.
BAS7	The architecture SHALL NOT compromise the security and privacy of Subscriber Data, nor the security and privacy of End User Data. Examples depending on territory include identities that can be used for tracking such as ICCID, MSISDN, EID, IMSI Ki etc.
BAS8	Regulatory issues are considered outside the scope of this document. However, any data which could be used to identify an individual SHALL be treated as personal data and subject to local regulations e.g. the EID, ICCID, etc.

Table 1: Basic Principles

2.2 Profile Principles

Principle no.	Description
PRO1	Profiles are the property of and SHALL be under the control of the issuing Operator.
PRO2	A Profile does not exist outside of an eUICC. I.e. a Profile is always located on a particular eUICC.
PRO3	A Profile SHALL be uniquely identified by its ICCID.
PRO4	An Enabled Profile in combination with an eUICC SHALL be able to carry all logical characteristics of a UICC.
PRO5	Once the Profile is enabled, all relevant UICC characteristics or features as described in ETSI 102 221 [2] specifications SHALL apply, with the exceptions as defined within this specification.
PRO6	It SHALL be possible to delete Profiles only when in a disabled state, with the exception of eUICC Memory Reset, and eUICC Test Memory Reset functions.
PRO7	Profile Management SHALL be governed by Policy.

Table 2: Profile Principles

3 Roles

3.1 eUICC Manufacturer

Role no.	Description
EUM1	The eUICC Manufacturer is responsible for the initial cryptographic configuration and security architecture of the eUICC.
EUM2	The eUICCs are delivered by the eUICC Manufacturer (EUM).

Role no.	Description
EUM3	Relevant parts of the eUICC Manufacturer's products and processes are certified by a GSMA-approved certification process.
EUM4	The EUM SHALL issue the eUICC Certificate to allow: <ul style="list-style-type: none"> eUICC authentication and proof of certification to other entities; authenticated keyset establishment between a SM-DP+ and an eUICC.
EUM5	The eUICC Manufacturer SHALL be responsible for the implementation of any LPA elements that reside in the eUICC and the compliance of the LPA with the requirements in Section 4.10.3.

Table 3: eUICC Manufacturer Role

3.2 Device Manufacturer

Role no.	Description
DM1	The Device Manufacturer SHALL be responsible for the implementation of any LPA elements that reside on the Device and the compliance of the LPA with the requirements in Section 4.10.2.
DM2	The Device Manufacturer SHALL be responsible for the implementation of any application that resides on the Primary Device allowing User Interface access to the Companion Device.

Table 4: Device Manufacturer Role

3.3 Operator and Service Provider

This section describes the characteristics of the Operator and Service Provider roles relevant to this architecture and its operation. Other characteristics exist but are considered out of scope.

Role no.	Description
OPE1	The Operator SHALL have access to a SM-DP+ via the ES2+ interface.
OPE2	In the event that a Subscriber has selected a Service Provider, that Service Provider will initiate the provisioning of a Profile Package.
OPE3	The Operator, potentially on behalf of the Service Provider, specifies the Profile characteristics and any features and applications analogous to removable UICCs.
OPE4	Operators SHALL be able to use an OTA Platform in order to manage the content of their Enabled Profile in the eUICC (RAM, RFM).
OPE5	A Subscriber MAY have a relationship with any number of Service Providers simultaneously.

Table 5: Operator Role

3.4 Subscriber and End User

Role no.	Description
SEU1	The Subscriber is the contract partner of the Service Provider for the Subscription. Note: The Subscriber MAY not be the End User.

Role no.	Description
SEU2	The End User is a human and uses the Device and/or the services related to the Enabled Profile.

Table 6: Subscriber and End User Role

3.5 Certificate Issuer

Role no.	Description
CIS1	The Certificate Issuer issues Certificates for Remote SIM Provisioning entities and acts as a trusted third party for the purpose of authenticating the entities of the system.
CIS2	The Certificate Issuer communicates with the SM-DP+, SM-DS and the EUM through interfaces that are out of scope of this specification.

Table 7: Certificate Issuer Role

4 Remote SIM Provisioning System Architecture

This section contains the functional description of the Remote SIM Provisioning system architecture for the Embedded UICC.

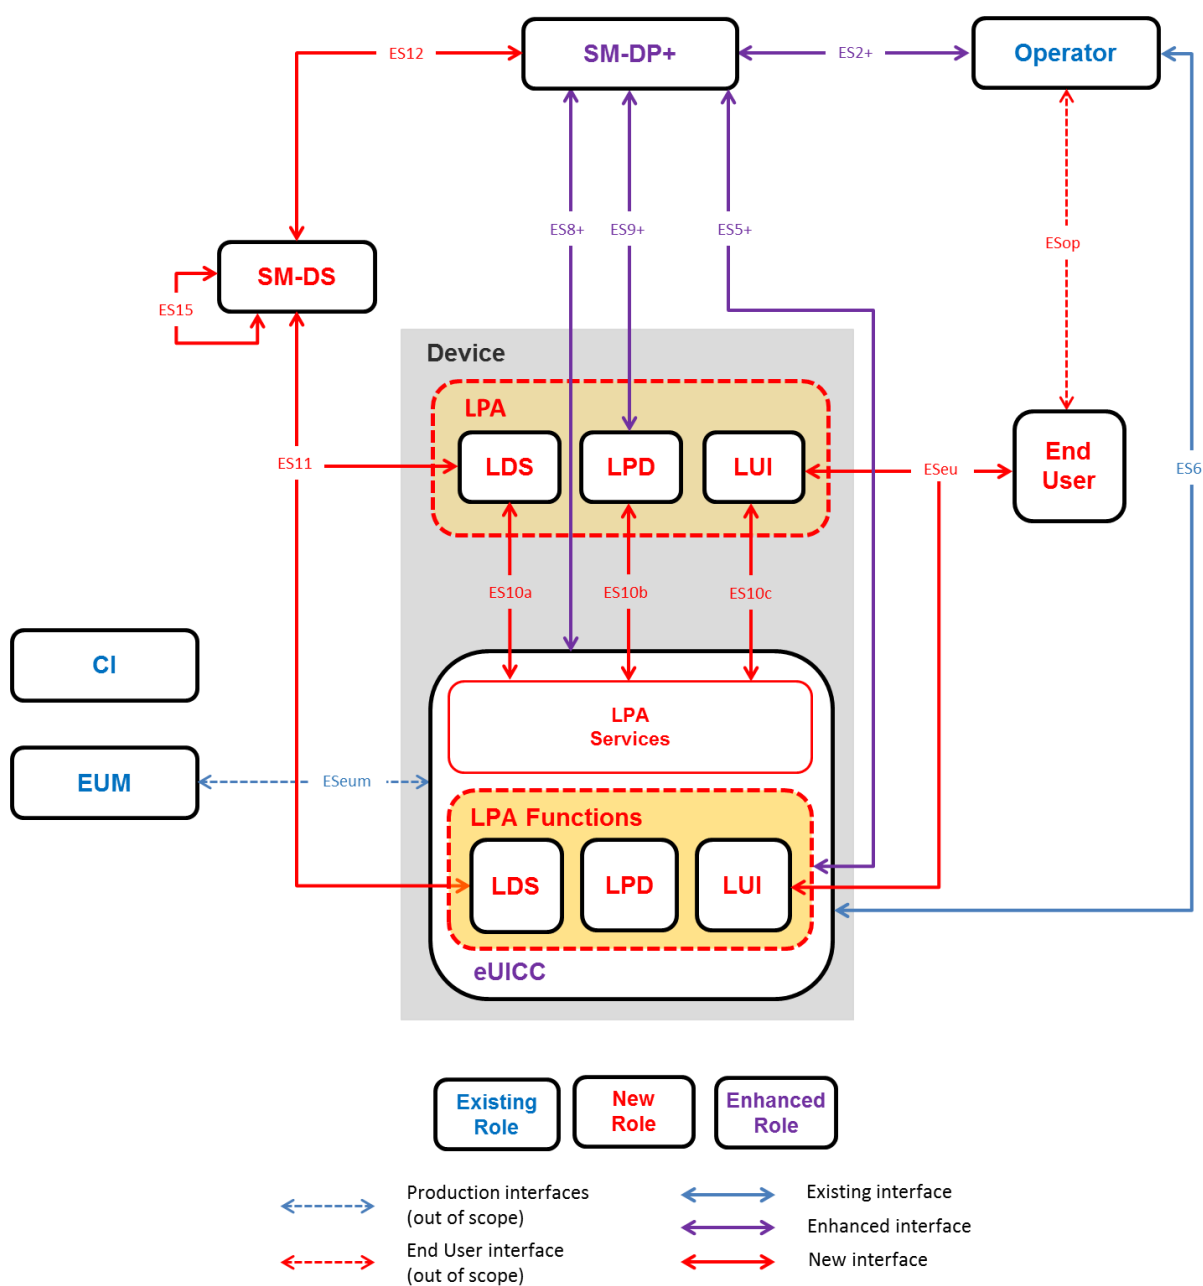


Figure 1: Remote SIM Provisioning System Architecture

4.1 eUICC Architecture

4.1.1 eUICC Architecture Overview

This section describes the internal high-level architecture of the eUICC. It SHOULD be noted that the eUICC architecture is similar to that used in the GSMA Remote SIM specification [10]. Profiles are provisioned based on the security framework defined in the GlobalPlatform Card Specification [11].

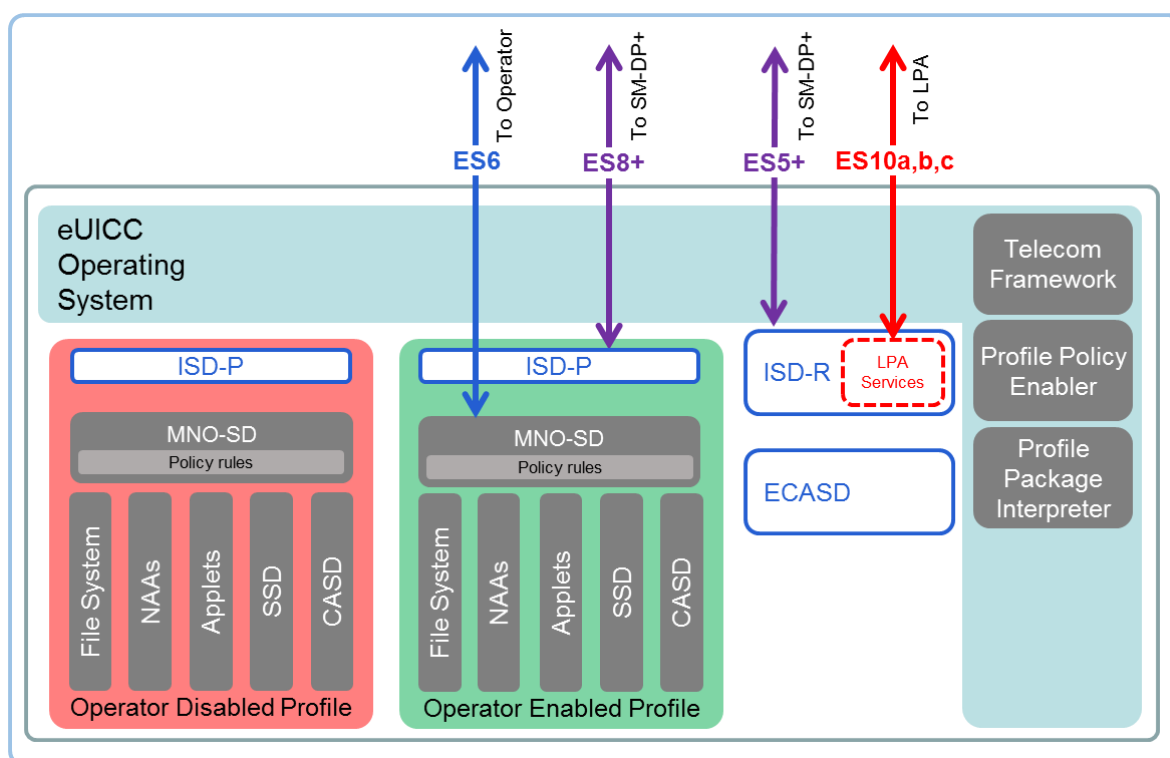


Figure 2: Schematic Representation of the eUICC

4.1.1.1 ECASD

The Embedded UICC Controlling Authority Security Domain (ECASD) is responsible for the secure storage of credentials needed to support the required security domains on the eUICC.

There SHALL only be one ECASD on an eUICC. The ECASD SHALL be installed and personalised by the EUM during the eUICC manufacturing as described in [11].

The ECASD SHALL have the following properties:

- Non-modifiable eUICC private keys for creating signatures.
- Associated Certificates for eUICC authentication.
- The Certificate Issuers' (CI) root public keys for verifying SM-DP+ Certificates.
- eUICC Manufacturers' (EUMs) keyset for key/Certificate renewal.

Additionally, the ECASD SHALL provide security functions used during key establishment and eUICC authentication.

4.1.1.2 ISD-R

The ISD-R is responsible for the creation of new ISD-Ps and the lifecycle management of all ISD-Ps.

4.1.1.3 ISD-P

The ISD-P is a secure container (security domain) for the hosting of a Profile. The ISD-P is used for Profile download and installation in collaboration with the Profile Package interpreter for the decoding/interpretation of the received Bound Profile Package.

The ISD-P is the on-card representative of the SM-DP+.

4.1.1.4 MNO-SD

The MNO-SD is the on-card representative of the Operator. It contains the Operator's Over-The-Air (OTA) Keys and provides a secure OTA channel.

4.1.1.5 Profile Policy Enabler

The eUICC Operating System (OS) service which offers Profile Policy Rules validation and enforcement.

4.1.1.6 Telecom Framework

The telecom framework is an operating system service that provides standardised network authentication algorithms to the NAAs hosted in the ISD-Ps. Furthermore, it offers the capability to configure the algorithms with the necessary parameters.

4.1.1.7 Profile Package Interpreter

The Profile Package interpreter is an eUICC operating system service that translates the Profile Package data into an installed Profile using the specific internal format of the target eUICC.

4.1.1.8 LPA Services

The LPA services provide necessary access to the services and data required by the LPA functions for the following:

1. The optionally stored Root SM-DS and/or Default SM-DP+ addresses.
2. Facilitates the reception of the Bound Profile Package in transfer from the LPA.
3. Provide information regarding the installed Profiles and their Metadata.
4. Provides Local Profile Management.
5. Provides functions for the LPA to authenticate and interact with the SM-DS.
6. Ensures access to the EID is restricted to only the LPA.

4.2 eUICC Requirements

Req no.	Description
EUICC1	The eUICC is a discrete tamper resistant hardware component.
EUICC2	An removable eUICC is packaged in a standardised ETSI Form Factor [2].
EUICC3	The eUICC SHALL be either removable or non-removable.
EUICC4	The behaviour of the eUICC with an Enabled Profile SHALL be equivalent to the UICC.
EUICC5	The eUICC SHALL be able to contain zero or more Profiles.
EUICC6	At a maximum, only one Profile SHALL be enabled at any point in time.
EUICC7	The behaviour of a NAA USIM or ISIM within a Profile on an eUICC SHALL be identical to a removable UICC NAAs USIM or ISIM. Note: No changes to existing 3GPP/3GPP2 USIM, CSIM and ISIM specifications are expected.
EUICC8	The eUICC SHALL support Milenage 00 and TUAK 0 algorithm sets.

Req no.	Description
EUICC9	The ownership of the eUICC MAY change throughout its lifetime as can the Device.
EUICC10	If any Profile Management operation does not complete successfully, the eUICC SHALL maintain the state it was in before it received the request.
EUICC11	The eUICC SHALL contain an ECASD and ISD-R security domains installed and personalised during manufacture.
EUICC12	The ECASD cannot be deleted or modified after eUICC manufacture.
EUICC13	The ISD-R SHALL be responsible for the creation of new ISD-Ps and the lifecycle management of all ISD-Ps.
EUICC14	The ISD-R SHALL be installed and personalised by the EUM during eUICC manufacturing as described in [11].
EUICC15	The eUICC SHALL be able to support an eUICC Memory Reset. This can only be requested by the End User.
EUICC16	The eUICC SHALL be able to support an eUICC Test Memory Reset. This can only be requested by the End User when the Device is in Device Test Mode.
EUICC17	The eUICC SHALL support the eUICC Profile Package Interoperable format as defined by SIMalliance [6].
EUICC18	An ISD-R SHALL: <ul style="list-style-type: none"> • be created within an eUICC at the time of manufacture; • NOT be deleted or disabled; • NOT be able to perform any operations inside an ISD-P.
EUICC19	An eUICC MAY provide LPA functions.
EUICC20	An ISD-P SHALL be created by the ISD-R at the request of the SM-DP+.
EUICC21	Communication between the eUICC and the SM-DP+ SHALL be protected in authenticity, integrity and confidentiality.
EUICC22	The eUICC SHALL NOT export Profiles installed on the eUICC.
EUICC23	The eUICC SHALL enforce an isolation of Profiles and prevent Profiles from operating outside of their execution environment i.e. Profile SHALL run in a sandbox.
EUICC24	The integrity of the Bound Profile Package SHALL be ensured during its installation on the eUICC.
EUICC25	The eUICC SHALL be tamper resistant (physically and logically).
EUICC26	Profile keys and algorithm parameters SHALL NOT be extractable from the eUICC.
EUICC27	All cryptographic functions SHALL be implemented in a robust tamper-resistant way and be resistant to side-channel attacks.
EUICC28	The Operator SHALL be able to update the OTA Keys in its Profile on the eUICC in a secure and confidential way, reusing existing OTA Platform mechanisms.
EUICC29	A downloaded Profile Package SHALL be installed on the eUICC in a disabled state.

Req no.	Description
EUICC30	The eUICC SHALL always report its specification version number in the first communication during the commencement of each session with the SM-DP+ or SM-DS.
EUICC31	The EUM SHALL install an eUICC Certificate in the eUICC used to verify the eUICC certification.
EUICC32	The EUM SHALL install an EUM Certificate in the eUICC used to verify the eUICC Certificate.
EUICC33	The eUICC SHALL have a means to authenticate to the SM-DS.
EUICC34	The eUICC SHALL protect itself against unauthorised access.
EUICC35	Upon Profile deletion, the eUICC SHALL ensure a complete deletion of all data related to the Profile.
EUICC36	The eUICC SHALL only accept Profile Management operations sent from the LPA in either the eUICC, or the Device.
EUICC37	The eUICC SHALL reject any Profile Management commands that are in conflict with the Policy Rules of the respective Profile.
EUICC38	If any Bound Profile Package download or installation does not complete successfully, the eUICC SHALL maintain the state it was in before it received the request.
EUICC39	The eUICC SHALL support GlobalPlatform Secure Element Access Control 0.
EUICC40	There SHALL be a means to preset a default SM-DP+ address in the eUICC.
EUICC41	The eUICC SHALL be able to store a Root SM-DS address.
EUICC42	The eUICC SHALL be able to send a delete Notification to notify the SM-DP+ that the Profile was deleted.
EUICC43	In EUICC42, if connectivity is not available to send the Notification of deletion to the SM-DP+, the Notification SHALL be retained and sent as soon as connectivity becomes available again.
EUICC44	The delete Notification process SHALL also be executed for each deleted Profile in case of eUICC Memory reset.
EUICC45	The eUICC SHALL support a set of standard functions and services including, but not limited to Java Applications, USIM Toolkit functions and GlobalPlatform features. The list of supported functions and services (e.g. API package names and versions) SHALL be explicitly referenced within the technical specification (SGP.22 0). A different set of functions and services MAY be defined/supported according to the different Embedded UICC categories as defined in Annex D.
EUICC46	<p>The eUICC SHALL support at least the following USIM Toolkit commands:</p> <ul style="list-style-type: none"> • PROVIDE LOCAL INFORMATION including the following fields: local info, IMEI, network measure results, date & time, access technology • TERMINAL PROFILE • ENVELOPE (SMS-PP DOWNLOAD) • SEND SHORT MESSAGE • DISPLAY TEXT

Req no.	Description
	<ul style="list-style-type: none"> • GET INPUT • RING TONE
EUICC47	An eUICC SHALL support at least two sets of elliptic curve parameters preloaded by the EUM during eUICC manufacturing, defined in GSMA SGP.22 V2.0 0.
EUICC48	Each Notification SHALL be uniquely identifiable and SHALL be signed by the eUICC.
EUICC49	Each Notification (delete, pre-delete, disable) SHALL be re-play attack protected and signed by the eUICC.
EUICC50 (FFS)	It SHALL be possible to request through a Profile parameter a pre-delete Notification to be sent notifying of a deletion which will be carried out by the eUICC after the sending of the Notification has been attempted.
EUICC51 (FFS)	In the event that a pre-delete Notification has been successfully attempted, the eUICC SHALL delete the Profile for which the Notification attempt was made. In the event that this Notification is unsuccessful but the Profile is deleted anyway, the Notification SHALL be retained and sent as soon as connectivity becomes available again.

Table 8: eUICC Requirements

4.3 eUICC Eligibility Check

The eUICC eligibility check enables a SM-DP+ to validate the eligibility of an eUICC for the installation of a Profile using information sent by the eUICC. The set of information sent by the eUICC to the SM-DP+ for eligibility checking purposes is referenced herein as the eUICC Eligibility Check Information. Some eUICC eligibility check parameters MAY be required due to Device capabilities which must be supported by the Profile/eUICC and delivered as part of the eUICC Eligibility Check Information set.

Note: Device capability refers to a Device feature or service-enabling function provided by the Device that MAY have a direct effect on the content of the Profile or the procedure used to download the Profile, and in turn requires support from the eUICC.

4.3.1 eUICC Eligibility Check Requirements

Req no.	Description
ELG1	The eUICC SHALL include the eSVN in the eUICC Eligibility Check Information.
ELG2	The eUICC SHALL include the available memory in the eUICC Eligibility Check Information.
ELG3	The eUICC SHALL declare in the Eligibility Check Information if it is unable to accept an additional Profile.
ELG4	The eUICC SHALL provide a valid current Certificate to the SM-DP+ signed by the EUM.
ELG5	The eUICC SHALL provide an identification of the EUM.
ELG6	The eUICC SHALL provide the current OS version.

ELG7	The eUICC SHALL provide Device enabler information relating to services that MAY need Profile support (e.g. NFC enablers).
ELG8	Eligibility Check Information SHALL be integrity and authenticity protected by the eUICC for its sending to the SM-DP+.
ELG9	The eUICC SHALL indicate the application runtime environment version and libraries versions supported in eUICC Eligibility Check Information.
ELG10	The eUICC SHALL indicate cryptographic algorithms and their respective key lengths supported in the eUICC Eligibility Check Information.
ELG11	The eUICC SHALL indicate the specification version it is supporting. This parameter SHALL be transmitted to the SM-DP+ during the eUICC eligibility check.
ELG12	The eUICC SHALL indicate its current certification status. This parameter SHALL be transmitted to the SM-DP+ during the eUICC eligibility check.
ELG13	If the eUICC is NFC capable (e.g. CAT3) it SHALL indicate its support to the relevant NFC services including its current certification status.
ELG14	The eUICC SHALL indicate its category (see Annex D). This parameter SHALL be transmitted to the SM-DP+ during the eUICC Eligibility Check.

Table 9: eUICC Eligibility Check Requirements

Note: It is assumed that the EID is normally shared to the SM-DP+ by other means and could be used for the eligibility check procedure.

4.4 Device Requirements

Req no.	Description
DEV1	The Device SHALL conform to the terminal requirements within ETSI TS 102 221 [2] with the exceptions as defined in this specification.
DEV2	There SHALL be a means for the End User to obtain the EID through the Device software. This SHALL only be possible through the LUI.
DEV3	If an eUICC is within the Device packaging, then the EID SHALL be printed in machine readable form on the Device packaging.
DEV4	Bearer connection of the Companion Device to the SM-DP+ SHALL only be determined by the bearer availability. Note: The Companion Device MAY use any connectivity method available to connect to the SM-DP+.
DEV5	Devices compliant with the GSMA NFC Handset Requirements 0 SHALL support the Open Mobile API 0 used by the Device applications to exchange data with their counterpart applications running in the Enabled Profile on the eUICC.
DEV6	The implementation of the Remote SIM Provisioning specification in the Device SHALL not impact the potential use of the SIM Lock mechanism defined in 3GPP TS 22.022 0
DEV7	In the case where the Device supports both the LPA in the Device, and the LPA in the eUICC, the Device SHALL have a mechanism (setting or configuration parameter) that sets which LPA SHALL be used.
DEV8	The End User SHALL be able to modify the parameter defined in DEV7.

Req no.	Description
DEV9	A Device that supports an embedded UICC without an LPA in the eUICC, SHALL provide LPA functions.
DEV10	A Device that supports only an embedded UICC with an LPA in the eUICC, MAY provide LPA functions.

Table 10: Device Requirements

4.4.1 Device Capability Requirements

Req no.	Description
DEVCAP1	There SHALL be a mechanism that is able to provide the Device capabilities to the SM-DP+.

Table 11: Device Capability Requirements

4.5 Device Initiated Requirements

4.5.1 Device Reset

Req no.	Description
FAC1	It SHALL be possible for the End User to perform any type of Device reset without affecting the status of the eUICC.
FAC2	The Device SHALL by means of a secured procedure, trigger/request the eUICC Memory Reset.
FAC3	The Device SHALL by means of a secured procedure, trigger/request the eUICC Test Memory Reset.

Table 12: Device Reset Requirements

4.5.2 eUICC Memory Reset

Req no.	Description
MEM1	eUICC Memory Reset SHALL delete all Profiles on the eUICC apart from pre-installed Profiles that are flagged as permanent.
MEM2	eUICC Memory Reset SHALL delete all Profiles on the eUICC regardless of their Policy Rules but not the Provisioning Profile or preinstalled Test Profiles.
MEM3	Authenticated Confirmation SHALL be verified in order to initiate eUICC Memory Reset.
MEM4	In addition to MEM3, other secure means MAY be provided to perform the eUICC Memory Reset function. The same level of security as is offered by the LUI based reset function SHALL apply. User Intent and Confirmation Request SHALL apply.

Table 13: eUICC Memory Reset Requirements

4.5.3 eUICC Test Memory Reset

Req no.	Description
MENT1	eUICC Test Memory Reset SHALL delete all post-issuance installed Test Profiles on the eUICC including the Enabled Test Profile if any.
MENT2	Simple Confirmation SHALL be verified in order to enable eUICC Test Memory Reset.
MENT3	If Test Profiles are not supported, then eUICC Test Memory Reset is not required.

Table 14: eUICC Test Memory Reset Requirements

4.6 Profile Requirements

4.6.1 Test Profiles

Req no.	Description
TPRO1	It is OPTIONAL for the removable eUICC to support the requirements of Test Profiles described in this section. If Test Profiles are not supported, it SHALL not be possible to download Test Profiles into the eUICC.
TPRO2	Test Profiles SHALL NOT be able to authenticate to an Operator's mobile network using Operator Credentials. The eUICC SHALL ensure that such Profiles cannot be used to connect to any Operator's mobile network even if authentication information is contained in the Test Profile.
TPRO3	A Test Profile SHALL be installed in its own individual ISD-P.
TPRO4	Test Profiles MAY be pre-installed on the eUICC.
TPRO5	Test Profiles SHALL only be visible and usable when the Device is in Device Test Mode.
TPRO6	It SHALL be possible to download, install, enable, disable or delete Test Profiles in the eUICC only in Device Test Mode with the exception of the eUICC Memory Reset operation.
TPRO7	Test Profiles, as with any other Profile, SHALL be managed through a certified SM-DP+.
TPRO8	The enabling of a Test Profile SHALL override the do not disable Policy Rule.
TPRO9	When the Device Test Mode is deactivated, the LPA SHALL disable any enabled Test Profile.
TPRO10	When the Test Profile is disabled, the eUICC SHALL enable the Operational Profile that was previously enabled, if any.
TPRO11	The Device Test Mode activation SHALL be obfuscated from the End User.
TPRO12	When exiting Device Test Mode, an End User notice SHALL be presented to prompt the tester to perform an eUICC Test Memory Reset.

Table 15: Test Profiles Requirements

The Device MAY implement a mechanism for connecting an external SIM card for the purpose of testing in the context of Device repair, without affecting the state of the eUICC.

4.6.2 Provisioning Profile

Req no.	Description
PPRO1	Provisioning Profiles SHALL be based on the same format structure as described for the Profile (Figure 2).
PPRO2	A Provisioning Profile MAY be enabled by the LPA upon End User request for operations defined in PPRO6 if establishment of the connectivity using the currently Enabled Profile is unsuccessful. If this results in an Operational Profile being disabled, the End User SHALL first give consent to the loss of communication provided by the Enabled Profile.
PPRO3	Provisioning Profiles and their associated Metadata SHALL not be visible to the End User on the LUI.
PPRO4	Provisioning Profiles SHALL not be selectable by the End User.
PPRO5	Provisioning Profiles SHALL not be deleted through any action by the End User including the use of eUICC Memory Reset.
PPRO6	Provisioning Profile SHALL only be used for the intended purposes of Profile downloading and related Profile maintenance functions. The Provisioning Profile SHALL not be used as an Operational Profile.
PPRO7	PPRO6 SHALL be enforceable in the RSP architecture.

Table 16: Provisioning Profile Requirements

4.7 Metadata Requirements

Req no.	Description
META1	All Profiles SHALL have associated Metadata.
META2	The Metadata SHALL be stored in the eUICC.
META3	The Metadata SHALL be accessible irrespective of the state of the Profile.
META4	The Metadata SHALL include a field for the Service Provider name. Note: EFSPN is already used in a different context outside of this specification and could be blank.
META5	The Metadata SHALL include a field for the ICCID of the Profile.
META6	The Metadata SHALL include a field for the End User nickname of the Profile.
META7	The Metadata SHALL include a field for containing a short description of the Profile defined by the Operator/Service Provider.
META8	The nickname SHALL be editable by the End User.
META9	The Metadata SHALL always be available to the LUI.
META10	The Metadata SHALL include an OPTIONAL field to allow the display of an icon defined by the Operator/Service Provider for the respective Profile.
META11	The Metadata SHALL be able to include a copy of the Policy Rules associated to the Profile.
META12	All Profiles SHALL be uniquely identified in the Metadata as Operational, Provisioning or Test Profile.
META13	An Operator SHALL be able to access and update the following Metadata of its Profile using the ES6 interface if the Profile is Enabled:

Req no.	Description
	<ul style="list-style-type: none"> • Service Provider name • Short description of the Profile • Icon of the Profile

Table 17: Metadata Requirements

4.8 NFC Requirements

An NFC Device and an NFC eUICC SHALL be compliant with the following list of requirements:

Req no.	Description
NFC1	An NFC Device SHALL be compliant with GSMA TS 26 0.
NFC2	After installation of an Operational Profile, the NFC eUICC SHALL support all requirements as specified in the SGP.03 GSMA NFC UICC Requirements Specification 0.
NFC3	The NFC Device SHALL retrieve and enforce access control rules as specified in the GlobalPlatform SEAC specification 0.
NFC4	The eUICC SHALL be able to generate proof that the Operational Profile has been deleted.
NFC5	All NFC applications and NFC enabling applications (e.g. ARA-M, PPSE, CRS, CREL, etc.) attached to an Operational Profile SHALL be included under the ISD-P created for the Profile, either under the MNO-SD or in an SD hierarchy with a self-extradited SSD with authorised management privilege.
NFC6	The NFC eUICC solution SHALL be able to provide assurance to NFC application Service Providers that the combination of an eUICC and Operational Profile is trusted. This solution SHALL be based on the CASD that is part of the Operational Profile and scenario Push 2B and scenario 3 as specified by SGP.03 0.
NFC7	If the NFC eUICC is compliant with M4M, the eUICC SHALL reset all the M4M virtual cards associated to that Profile when a Profile containing M4M applications is disabled.
NFC8	The appropriate NFC related certification information SHALL be part of the information shared with the SM-DP+ during the eUICC Eligibility Check.
NFC9	A NFC Device SHALL at least have an embedded eUICC or have the capability to support a removable eUICC that is compliant with CAT3 and SGP.03 0 in either instance.

Table 18: NFC Requirements

4.9 Subscription Manager Data Preparation + (SM-DP+)

4.9.1 SM-DP+ Overview

The SM-DP+ is responsible for the creation, generation, management and the protection of resulting Profiles upon the input/request of the Operator. It is also responsible for the delivery of a Profile within a Bound Profile Package, making the Bound Profile Package available for the secure delivery. In addition, the SM-DP+ is responsible for requesting the creation of the ISD-P in the eUICC into which the Profile will be installed. The SM-DP+ will

also be the off-card entity that will be responsible for the lifecycle management of the ISD-P that was created at its request. This is performed via the distinct functions listed below.

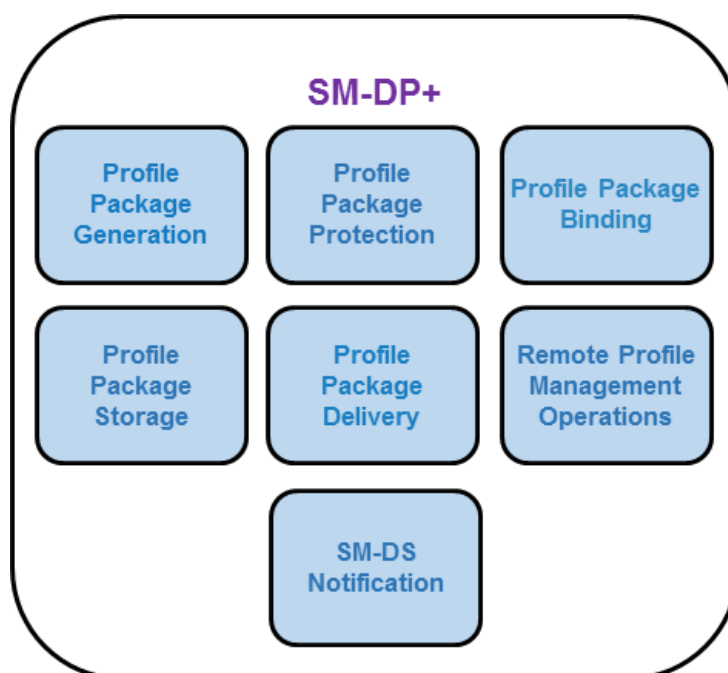


Figure 3: SM-DP+ Functions

Function name	Description
Profile Package Generation	Creates Profile Packages (i.e. Personalised Profiles, including (IMSI, Ki, ICCID,...)) from Profile Descriptions agreed with Operators. This can be an off-line batch or real time process.
Profile Package Protection	Secures each Profile Package according to the security process creating the Protected Profile Package.
Profile Package Binding	Binds the Protected Profile Package to a target eUICC using the security process thus creating the Bound Profile Package.
Profile Package Storage	Temporarily stores Protected Profile Packages or Bound Profile Packages for subsequent delivery to the eUICC.
Profile Package Delivery	Securely transmits and installs the Bound Profile Package to the eUICC through the LPA.
SM-DS Event Registration	Notifies the SM-DS of a pending operation for a specific eUICC.

Table 19: SM-DP+ Function Descriptions

4.9.2 SM-DP+ Requirements

Req no.	Description
SMDP1	The SM-DP+ SHALL act on behalf of an Operator.
SMDP2	The SM-DP+ SHALL be able to initiate the request for ISD-P creation as part of the Bound Profile Package delivery.

Req no.	Description
SMDP3	The SM-DP+ SHALL establish an end-to-end secure channel to the eUICC to download and install Bound Profile Packages via the LPA or directly to the eUICC.
SMDP4	The SM-DP+ SHALL link a Protected Profile Package for binding to a specific eUICC only at the request of the respective Operator.
SMDP5	The SM-DP+ SHALL create a Bound Profile Package from the linked Protected Profile Package only at the request of the respective eUICC.
SMDP6	The SM-DP+ SHALL be able to create a Bound Profile Package for any Certified eUICC.
SMDP7	Only the target eUICC SHALL be able to decrypt the content of a Bound Profile Package delivered by the SM-DP+.
SMDP8	Profile Packages SHALL only leave the SM-DP+ after completing all production steps, Profile Package Protection, and binding.
SMDP9	Communication session between the SM-DP+ and the LPA SHALL be terminated by the SM-DP+ after execution of intended Operation(s).
SMDP10	End-to-end communication between the SM-DP+ and the eUICC involved in the Profile download and installation SHALL be protected in terms of integrity, authenticity and confidentiality.
SMDP11	Profile Packages stored within the SM-DP+ SHALL always be protected through encryption.
SMDP12	On the SM-DP+, backups as well as used data within the Profile creation and storage infrastructure SHALL be discarded using secure deletion procedures (logically and physically).
SMDP13	SM-DP+/eUICC communication SHALL incorporate Perfect Forward Secrecy (PFS).
SMDP14	The transport used for the Bound Profile Package SHALL implement anti-replay mechanisms between the SM-DP+ and the eUICC.
SMDP15	Connectivity to the SM-DP+ SHALL be aborted and an explicit error message SHALL be triggered by the SM-DP+ upon failure to verify authenticity of the connecting party. (No message SHALL be sent to the connecting party)
SMDP16	After a configurable number of failed attempts to download a Bound Profile Package to the LPA, the transport encryption procedure SHALL be renewed. If subsequent attempts to download the Bound Profile Package fail more than a configurable number of times, the provisioning transaction SHALL be terminated and the Operator SHALL be notified.
SMDP17	The SM-DP+ SHALL use a secure version of Internet protocols whenever available (e.g. DNSSEC, DNSCurve, etc.).
SMDP18	The SM-DP+ SHALL prepare Profile Packages following the eUICC Profile Package Interoperable Format Specification as defined by SIMalliance [6].
SMDP19	The SM-DP+ SHALL be able to create Bound Profile Packages on demand.
SMDP20	It SHALL be possible for the SM-DP+ to create Profile Packages in bulk.

Req no.	Description
SMDP21	The SM-DP+ SHALL send a confirmation of the successfully completed download and installation of a Profile to the Operator.
SMDP22	There SHALL be a mechanism to remove any relationship between any SM-DP+ and the ISD-P following the successful installation of the Profile. Such a mechanism SHALL either be ordered by the Operator or be performed by the Operator itself. If such deletion mechanism is used, there will be no off-card entity responsible for managing the ISD-P of the installed Profile.
SMDP23	The SM-DP+ SHALL be globally uniquely identified by its SMDPid.
SMDP24	The SM-DP+ Certificate SHALL include the SMDPid.
SMDP25	The SM-DP+ SHALL be able to send a Notification to the Operator informing them that a specific Bound Profile Package download is about to start.
SMDP26	The SM-DP+ SHALL be able to send an eUICC Eligibility Check Information report and other relevant information (e.g. Activation Code, ICCID, etc.) to the Operator ahead of/prior to the eUICC Bound Profile Package download.
SMDP27	The SM-DP+ SHALL be able to perform Event Registrations to the SM-DS.
SMDP28	The SM-DP+ SHALL be able to request from an Alternative SM-DS not to propagate the Event Registration to the Root SM-DS.
SMDP29	The SM-DP+ SHALL be able to send a Profile delete Notification to the Operator owning a Profile when a related delete Notification is received from the eUICC.
SMDP30	The SM-DP+ SHALL support the following states for a Profile Package, triggered by the Profile Owner: <ul style="list-style-type: none"> • A Profile Package is not released for Profile Package download. • A Profile Package is released for Profile Package download.
SMDP31	The SM-DP+ SHALL be able to select the elliptic curve parameter in the Profile download procedure.
SMDP32 (FFS)	It SHALL be possible for a SM-DP+ to conduct an Event Record Query to a SM-DS (Root or Alternative) for the purpose of auditing Event Registrations it owns.
SMDP33 (FFS)	The SM-DP+ SHALL be able to query the existence of an Event Record on the Root SM-DS or the Alternative SM-DS, identified by the EID or the Event-ID over the ES12 interface.
SMDP34 (FFS)	Response to a SM-DP+ Event Record Query SHALL only occur where the Root SM-DS or Alternative SM-DS validates the Event Record ownership.
SMDP35 (FFS)	Ownership validation of a SM-DP+ Event Record Query SHALL only use the requester's address or the submitted Event-ID against the components of the Event Record held.
SMDP36	A SM-DP+ SHALL support all sets of elliptic curve parameters as defined in GSMA SGP.22 V2.0 0.

Table 20: SM-DP+ Requirements

4.9.3 Default SM-DP+ Address on the eUICC

Req no.	Description
DF1	The default SM-DP+ address in the eUICC SHALL be ignored if an SM-DP+ address is present in an AC being presented to the LUI.
DF2	The default SM-DP+ address in the eUICC SHALL be accessible by the LPA to establish a connection to this SM-DP+.
DF3	The default SM-DP+ address in the eUICC MAY be left blank.
DF4	If the default SM-DP+ address in the eUICC is blank, then the use of the SM-DS discovery procedure or an SM-DP+ address in an AC SHALL be required to establish the target SM-DP+.
DF5 (FFS)	No redirection SHALL be supported from a query to the default SM-DP+ address.

Table 21: Default SM-DP+ Address on the eUICC Requirements

4.10 Local Profile Assistant (LPA)

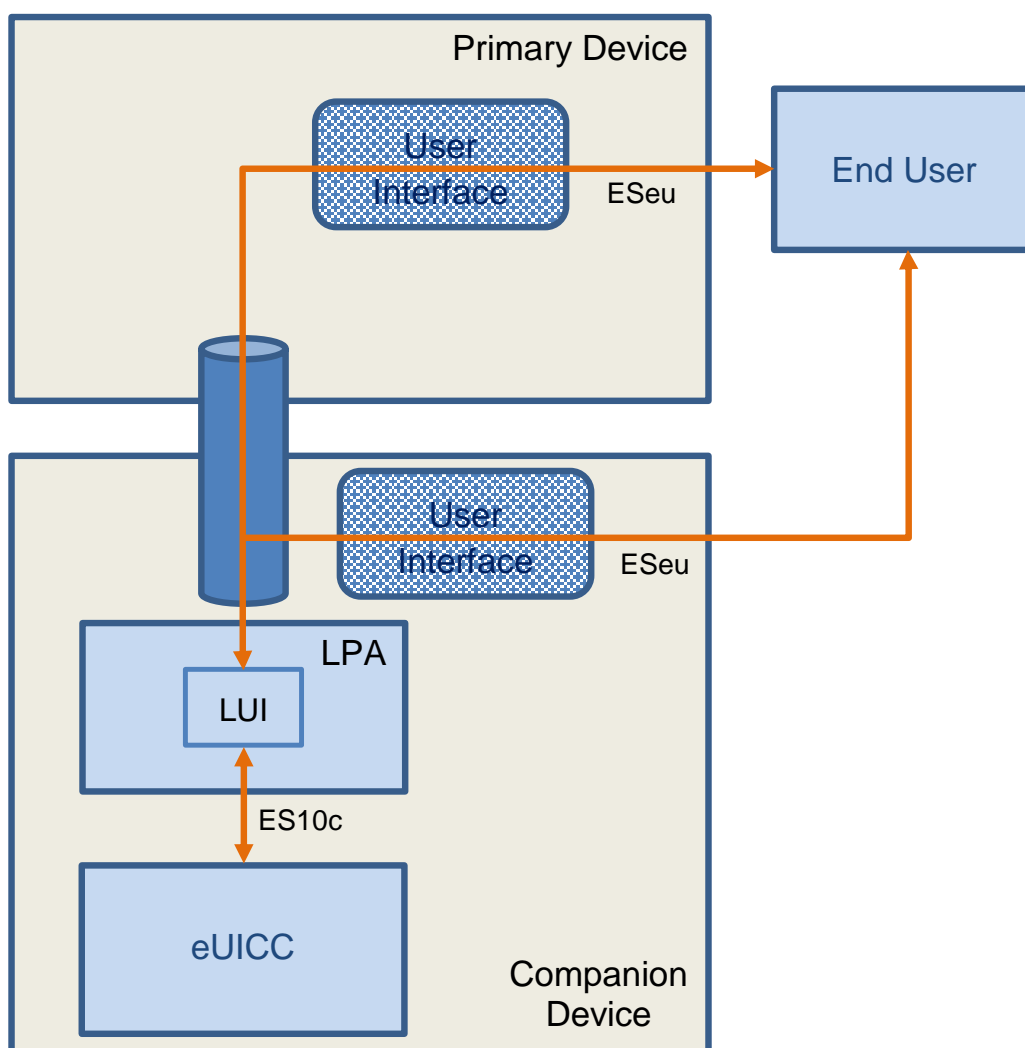


Figure 4: End User Interaction and Interfaces between a Primary and Companion Device, where the Companion Device MAY have a UI

4.10.1 LPA Overview

This role exists both within the Device in conjunction with LPA Services provided by the eUICC, and within the eUICC with the LPA function provided by the eUICC. It provides three distinct functions, the Local User Interface (LUI), the Local Profile Download (LPD) and the Local Discovery Service (LDS) as described below. Whilst the eUICC alone cannot provide any of these functions without Device interaction, the specific level of interaction will depend upon the capability within the Device. Therefore, the functions of the LPA will be undertaken within the Device. The way this variability is implemented across different Devices and Device types is for further study.

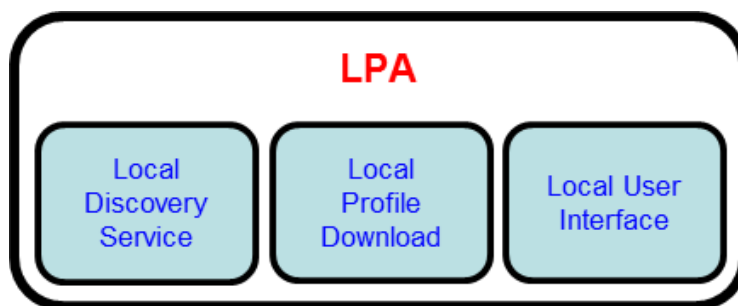


Figure 5: LPA Functions

Function name	Description
Local Discovery Service (LDS)	Where required, the LDS is responsible for retrieving pending Event Records from the SM-DS.
Local Profile Download (LPD)	This plays a proxy role for the efficient download of a Bound Profile Package in two stages: (i) the download of a Bound Profile Package from the SM-DP+ to the LPD in a single transaction, and (ii) the onward transfer of the Bound Profile Package into the eUICC in segments. This function will depend on network, Device, and eUICC capabilities.
Local User Interface (LUI)	This function allows the End User to perform Local Profile Management on the Device. User Intent SHALL be enforced.

Table 22: LPA Function Descriptions

4.10.2 Operational LPA Modes

When there is an LPA in the Device and in the eUICC, then the LPA to be used is specified by the Device settings (DEV7):

- LPA in the Device
- LPA in the eUICC

4.10.2.1 LPA in the eUICC

LPA functions are provided by the eUICC.

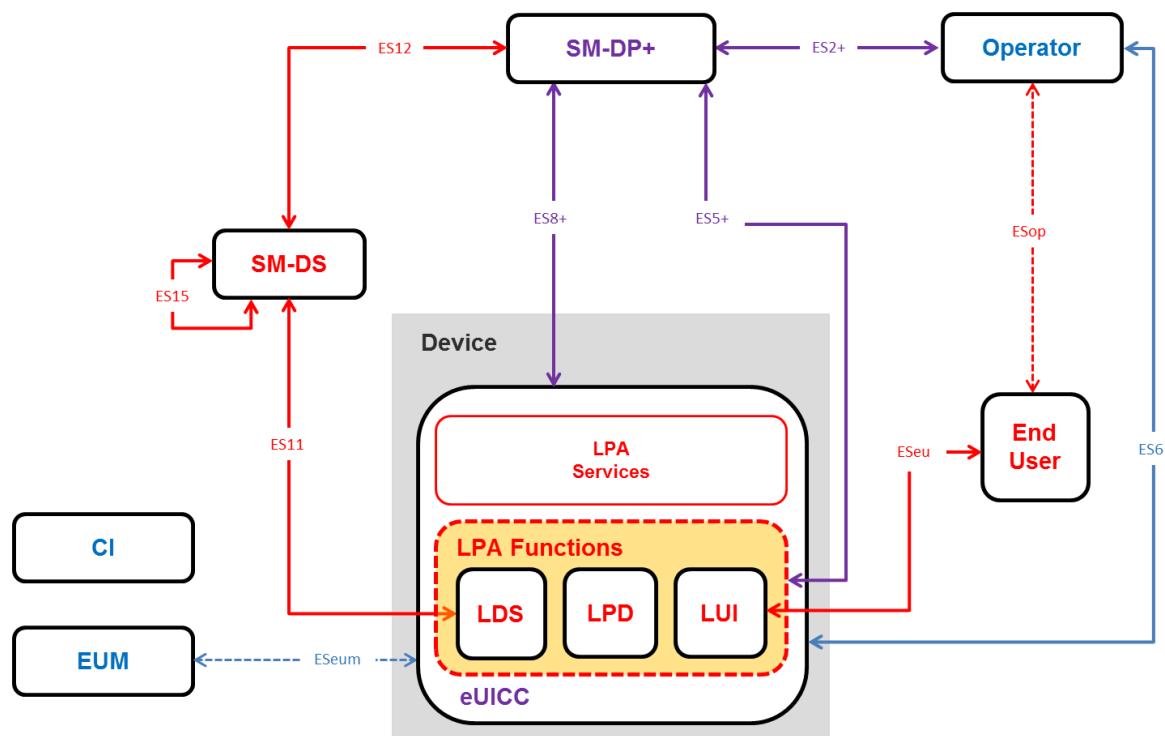


Figure 6: LPA in the Euicc

4.10.2.2 LPA in the Device

LPA functions are provided by the Device.

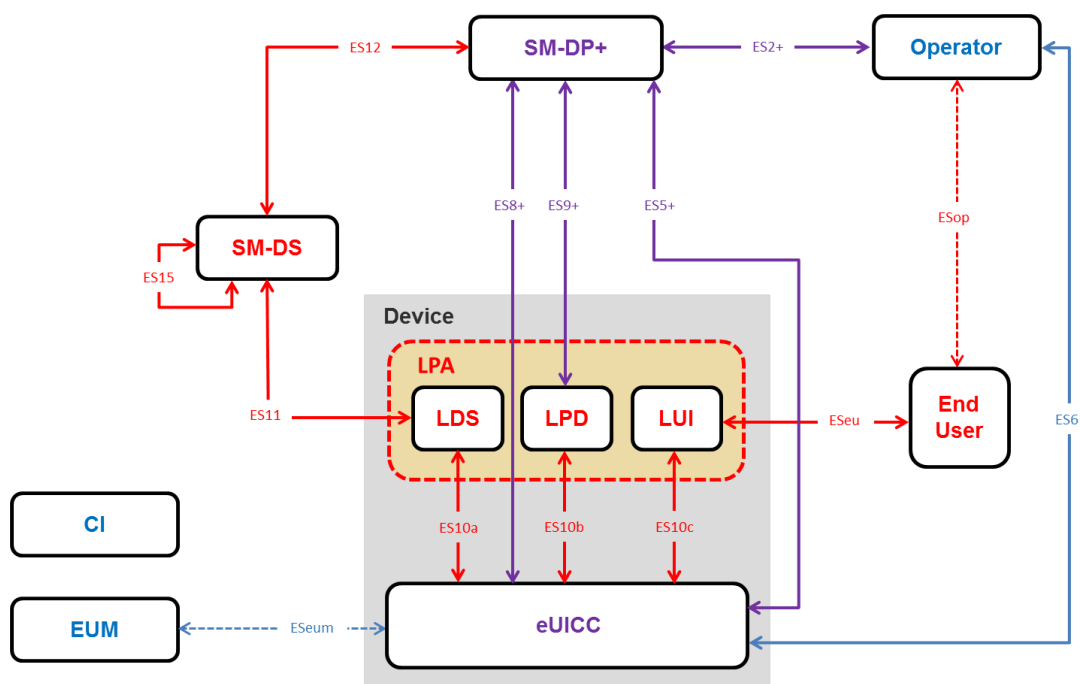


Figure 7: LPA in the Device

4.10.3 LPA Requirements

Req no.	Description
LPA1	The LPA SHALL be responsible for instructing the eUICC to perform Local Profile Management functions as per End User request.
LPA2	A mechanism SHALL be implemented between any LPA elements outside the eUICC, and the eUICC to ensure that the communication is not compromised wherever the LPA is located.
LPA3	A secure mechanism SHALL be implemented between the LUI and the associated display or input applications on the Device.
LPA4	Access to the LUI application(s) SHALL be protected according to current best practices. This SHALL be enforced by the Device OS.
LPA5	All Local Profile Management Operations SHALL require User Intent (no automation).
LPA6	LUI access SHALL require User Intent (no automation).
LPA7	The End User SHALL be able to easily access the list of installed Profiles.
LPA8	The LPA SHALL protect Profile Metadata from unauthorised access.
LPA9	The Local Profile Management Operation, 'enable' SHALL be supported. This operation SHALL allow the End User to select the Profile.
LPA10	The Local Profile Management Operation, 'disable' SHALL be supported. This operation SHALL allow the End User to disable the Enabled Profile.
LPA11	The Local Profile Management Operation, 'delete' SHALL be supported. This operation SHALL allow the End User to delete a Disabled Profile from the eUICC. The End User SHALL acknowledge the message of consequences for the deletion of the Profile. Authenticated Confirmation SHALL be enforced.
LPA12	The Local Profile Management Operation 'query' SHALL be supported. This operation SHALL allow the End User to view the list of installed Operational Profiles on the eUICC and relevant associated information through the Metadata.
LPA13	The Local Profile Management Operation, 'edit default SM-DP+ address' SHALL be supported. This operation SHALL allow the End User to edit the default SM-DP+ address. Simple confirmation SHALL be enforced.
LPA14	The Local Profile Management Operation 'eUICC Memory Reset' SHALL be supported. This operation SHALL execute the eUICC Memory Reset as described in Section 4.5.2. The End User SHALL acknowledge the message of consequences of 'eUICC Memory Reset'. Authenticated Confirmation SHALL be enforced.
LPA15	The Local Profile Management Operation 'eUICC Test Memory Reset' SHALL be supported. This operation SHALL execute the eUICC Test Memory Reset as described in Section 4.5.3. Simple Confirmation SHALL be enforced.
LPA16	The Local Profile Management Operation 'edit nickname' SHALL be supported. This operation SHALL allow the End User to add or modify a nickname for the selected Profile. The operation SHALL NOT modify the Service Provider name.
LPA17	The Local Profile Management Operation 'add Profile' SHALL be supported. This operation SHALL allow the LPA to download and install a new Profile to the eUICC. Three options SHALL be supported by the LPA:

	<ul style="list-style-type: none"> • Profile download via default SM-DP+ • Profile download via SM-DS services • Profile download via Activation Code <p>Authenticated Confirmation SHALL be enforced except in the case of initial Device setup (LPA62).</p>
LPA18	The LPA SHALL NOT be accessible by any applications other than those provided by the provider of the LPA for the sole purpose of enabling the services and functions of the LPA.
LPA19	The LPA provider SHALL enforce a secure and non-interceptable Authenticated Confirmation.
LPA20	The LPA provider SHALL enforce a secure and non-interceptable Simple Confirmation located on the Device.
LPA21	Access to the LUI SHALL be protected by an Authenticated Confirmation.
LPA22	The mechanism in LPA21 SHALL be selectable/unselectable by the End User.
LPA23	The mechanisms in LPA21 SHALL be prompted to be enabled by default but this can be skipped by the End User.
LPA24	The Device SHALL implement a mechanism to protect the LPA access through an Authenticated Confirmation. This Authenticated Confirmation MAY be implemented by using the mechanisms implemented in the Device such as phone lock code, fingerprint input, etc.
LPA25	The End User SHALL be able to define dedicated personalised user credential to access the LPA.
LPA26	If the End User selects the protection of access to the LUI (LPA23), then the subsequent Authenticated Confirmation at operation level MAY be replaced with a Simple Confirmation.
LPA27	When enforced, any Confirmation Request SHALL allow the End User to cancel the Local Profile Management Operation.
LPA28	It SHALL be possible to expose the LUI of a Companion Device allowing input from an End User interface on the Primary Device.
LPA29	<p>When a Companion Device LUI allows input from a Primary Device, the Companion Device LUI SHALL be able to restrict the actions that can be applied. For example:</p> <ul style="list-style-type: none"> • not offer the eUICC Memory Reset; • only 'enable' and 'disable' operation are exposed. • Profile enabling is exposed only if no Profile is already enabled on the Companion Device.
LPA30	The LUI of the Companion Device SHALL be able to request an End User initiated action on the Companion Device before the establishment of any proximity secure link (used for inputs into the LUI from another Device).
LPA31	A point-to-point proximity secure link initiated by the End User and offering confidentiality and integrity SHALL be established between the Companion and Primary Device for any input executed from the Primary Device.
LPA32	When operating a Companion Device LUI from a Primary Device, any required User Intent or Confirmation Request SHALL only be executed by the LPA on the Companion Device. The physical End User input MAY be done in either the Primary or the Companion Device.

LPA33	The Device Manufacturer of the Companion Device SHALL implement a secure measure to ensure integrity and eligibility of any application accessing the LUI.
LPA34	The End User Data used for the User Intent protection (e.g. PIN code, fingerprint) SHALL be stored in a secure environment.
LPA35	The LPA SHALL be able to utilise any on-Device and existing connection to the internet, such as Wi-Fi or Wi-Fi direct, in order to reach out to the SM-DP+. Over such connection, ES8+ and ES9+/ES5+ can be established.
LPA36	The LPA SHALL be able to utilise any internet connection offered by another Device, via other connectivity mechanisms such as cabled tethering, locally shared Wi-Fi connections or Bluetooth in order to reach out to the SM-DP+. Over such connection, ES8+, and ES9+/ES5+ can be established.
LPA37	The LPA SHALL be able to determine if connectivity to the SM-DP+ is available by any means.
LPA38	The LPA SHALL be able to notify the End User that there is no connection to the internet and or no connection to the SM-DP+ in order to allow the End User to enable or troubleshoot required connectivity.
LPA39	The LPA SHALL only be able to access the eUICC if it has assigned privileges.
LPA40	There SHALL only be one LPA on the Device.
LPA41	The LPA SHALL only perform operations that are described in this specification.
LPA42	LPA procedures SHALL not be called by any external (non-LPA) processes.
LPA43	When multiple Operational Profiles are installed, the Local Profile Management Operation 'enable' SHALL first initiate the 'disable' operation for any Enabled Profile prior to initiating the 'enable' operation for the selected Profile.
LPA44	The LPA SHALL be able to read the Policy Rules.
LPA45	When a Profile with Profile Policy Rules is installed, in the case where End User consent is requested, the LPA SHALL display the consequences of the Policy Rule to the End User. This message SHALL be formulated in a descriptive and non-discriminatory manner (e.g. for "Non-Delete" Policy Rule: "The profile that you are about to install cannot be deleted under the terms you have agreed with your service provider. Approve installation YES/NO?"). Authenticated Confirmation SHALL be enforced with the exception listed in LPA17.
LPA46	<p>Prior to downloading a new Profile, the LPA SHALL check the condition for whether the Enabled Profile, if any, has enabled POL RULE1. If this is the case a dedicated message SHALL be displayed identifying the consequences to the End User. Examples of information that may be displayed would be:</p> <ul style="list-style-type: none"> • Enabling of the new Profile will not be possible because the currently Enabled Profile cannot be disabled. • The Profile name of the Enabled Profile. • For more information, the End User should contact the Profile Owner of this Profile. <p>With displaying this message, the End User SHALL be able to decide on whether to continue the download or to cancel the operation.</p> <p>This dialogue MAY be combined with the regular End User Intent for confirming a Profile download.</p>

LPA47	The communication between the User Interface of the Primary Device and the LUI of the Companion Device SHALL be protected (confidentiality, integrity and authentication).
LPA48	There SHALL be a mechanism to limit the validity of LPA26 if the End User quits the LPA menu or does not perform the operation within a period of time to avoid the abuse of bypassing the Authenticated Confirmation
LPA49	Confirmation Requests for consecutive Local Profile Management Operations MAY be achieved in one step as long as the different actions are clearly explained to the End User. For instance, upon installation of a new Profile, the LPA MAY propose 'add Profile' and 'enable' into one single step with a single confirmation only (e.g. "Do you want to install profile 'ProfileName' on your Device and enable it? Yes / No / Install only")
LPA50	When consecutive operations are achieved in one single step (LPA49), the highest level of confirmation SHALL be applied - i.e. in the case of two operations having respectively Authenticated and Simple Confirmation Requests, the single step SHALL use the Authenticated Confirmation Request.
LPA51	The Local Profile Management Operations 'enable' (LPA9), 'disable' (LPA10), 'delete' (LPA11) SHALL be able to trigger a Notification to the SM-DP+ of the respective Profile being managed to indicate that this operation was actioned. This Notification is sent on a best effort basis and SHALL not impact otherwise the operation.
LPA52	The LPA SHALL provide a Trusted Link from the End User to the eUICC through the LUI.
LPA53	The End User SHALL be able to configure the LPA such that the automatic Event Record retrieval from the SM-DS can be disabled.
LPA54	The LPA SHALL be able to read any SM-DS and SM-DP+ addresses configured in the eUICC.
LPA55	It SHALL be possible to check the LPA Integrity. If the integrity check fails, communication between the eUICC and the LPA SHALL not occur.
LPA56	LPA Integrity SHALL be ensured using the best practice methods on the targeted platform. See Annex G.
LPA57	The polling mechanism in the LPA SHALL have two types of triggers; those that are event based, and those that are End User initiated.
LPA58	Event based triggers for polling SHALL be provided. As a minimum this SHALL include Device power-up; in addition other triggers MAY be provided. Event based triggers MAY be disabled by the End User.
LPA59	End User initiated triggers for polling SHALL include: <ul style="list-style-type: none"> • The 'Add Profile' operation to trigger the default SM-DS if configured, and the Root SM-DS. • The 'Update Profile' operation to trigger the SM-DP+ stored in the Profile. • In addition, other manual triggers MAY be provided.
LPA60	If a Profile Package is not yet released for download then the LPA SHALL be informed by means of a specific error code.
LPA61	Error/retry handling of the LPA polling mechanism SHALL be implemented e.g. advise the End User to retry or automatically retry as appropriate. The corresponding confirmation needs to be enforced in the retry cases.

LPA62	<p>During initial Device setup, if no Operational Profile is already installed, the following procedure SHALL apply in this order:</p> <ol style="list-style-type: none"> 1. If a default SM-DP+ address is configured, the LPA SHALL contact the SM-DP+ to check for a waiting Profile. 2. If no Profile is waiting in (1), then the Root SM-DS address SHALL be contacted to check for the Notification of a waiting Profile. <p>Simple Confirmation SHALL be enforced for the procedure described above.</p>
LPA63	<p>The End User SHALL always be able to manually request the retrieval of any waiting Event Record via the LPA if there is no default SM-DP+ address.</p> <p>Note: This may be achieved through the combination with existing operations – e.g. pressing “Add Profile” would contact the server to retrieve a Notification</p>
LPA64	<p>The Operator/Service Provider name SHALL be given in the signalling information from the SM-DP+ to the LPA when initiating the download of a Profile and shown to the End User before the Profile is downloaded.</p> <p>Simple Confirmation SHALL be enforced.</p>
LPA65	<p>The LPA SHOULD present the EID to the End User as both text and in a defined scannable format (e.g. QR Code).</p>
LPA66 (FFS)	<p>For the case where a Profile to be disabled and deleted in a combined action is providing the only available connection, the pre-delete Notification SHALL be sent before the Profile is disabled. The failure of this attempt SHALL not block the deletion nor the connection teardown.</p>
LPA67	<p>If the SM-DP+ stops the Profile download procedure, the LPA SHALL be able to notify the End User.</p>

Table 23: LPA Requirements

4.10.4 LDS Requirements

Req no.	Description
LDS1	<p>The LDS SHALL be able to read out the address(es) described in EUICC Error! Reference source not found. and only use the(se) address(es) to connect to the SM-DS</p>

Table 24: LDS Requirement

4.11 Subscription Manager – Discovery Service (SM-DS)

4.11.1 SM-DS Overview

The role of the SM-DS is to provide mechanisms that allow an SM-DP+ to inform the LDS within any Device that an SM-DP+ wishes to communicate with it. The purpose of the SM-DS to LDS communication SHALL be informing the LDS of a pending Event

The principle of operation remains the same for all use cases. The SM-DP+ will send an Event Registration message for a target Device to a SM-DS.

In a simple deployment, only the Root SM-DS is configured on the eUICC. The Root SM-DS address is unique and filled in the eUICC. The LDS in the target Device polls the Root SM-DS using the same logical location. When the Root SM-DS has an Event-ID for the target Device it will respond with the SM-DP+ address, or if there is no Event-ID the response will be a null response.

In a deployment with cascaded SM-DSs, the SM-DP+ will send an Event Registration to an Alternative SM-DS, which may not be configured as the Root SM-DS on the eUICC. This Alternative SM-DS will cascade the Event Registration to the Root SM-DSs. The LDS in the target Device polls the Root SM-DS and will receive the Alternative SM-DS address. It will then request the Event from the Alternative SM-DS, which will respond with the SM-DP+ address.

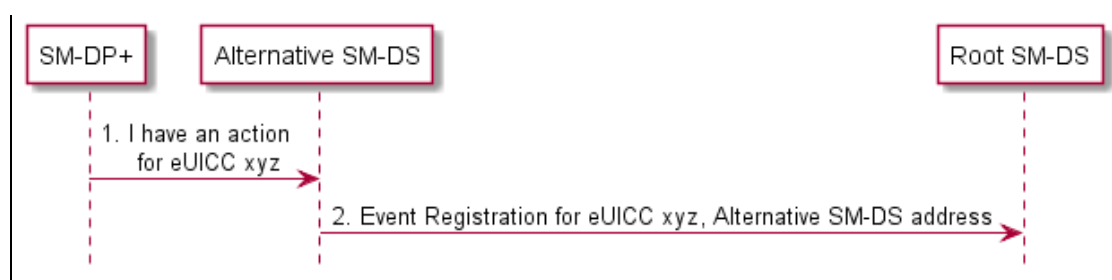


Figure 8: Alternative Device to Root SM-DS Event Registration

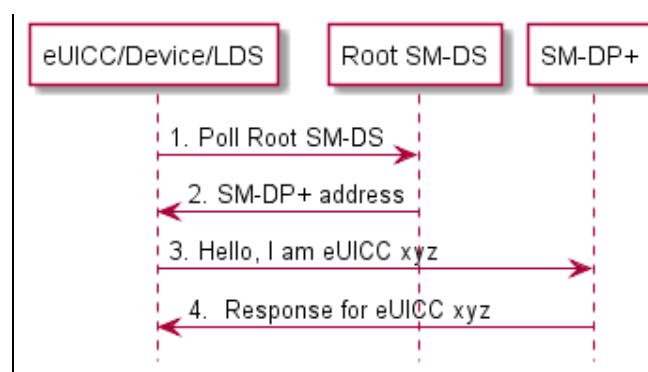


Figure 9: Root SM-DS Event Registration

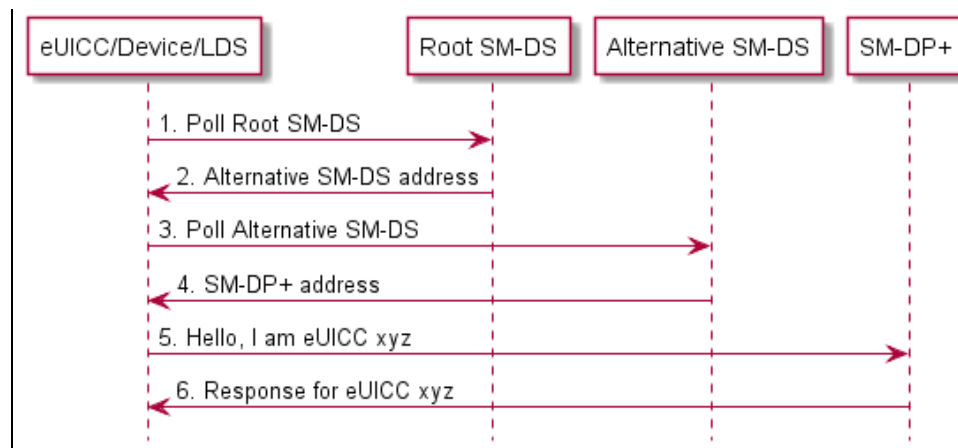


Figure 10: Alternative SM-DS Discovery

4.11.2 SM-DS Implementation

Two configurations of the SM-DS addresses on the eUICC MAY exist:

- A Root SM-DS address
- An Alternative SM-DS address

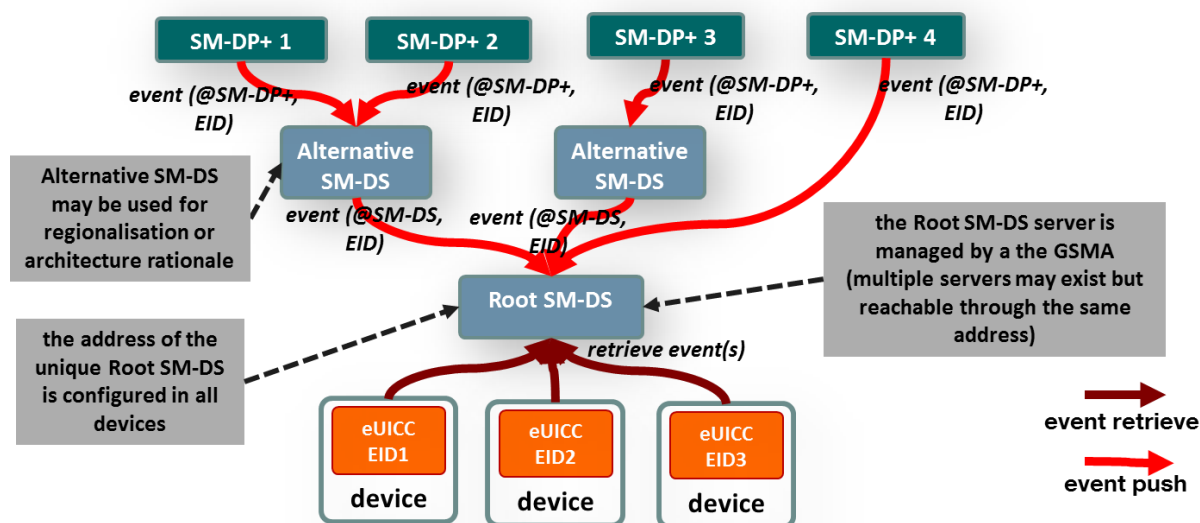


Figure 11: SM-DS Implementation

Figure 11 shows both configurations. The Root SM-DS is configured at the time of Device manufacture and is invariant.

4.11.3 SM-DS Implementation Guidelines

The following statements SHOULD be considered when defining a technical implementation:

- A competitive environment on the supply of SM-DS services SHOULD be favoured by the approach.
- There SHOULD be no single-points-of-failure.
- Implementation SHOULD inherently provide both vertical and horizontal performance/scalability.
- There SHOULD be no need for pre-registration of Devices or eUICCs at a certain SM-DS as required in SGP.02 0 (GSMA Embedded SIM for the SM-SR).

4.11.4 SM-DS functions

The SM-DS has three distinct functions:

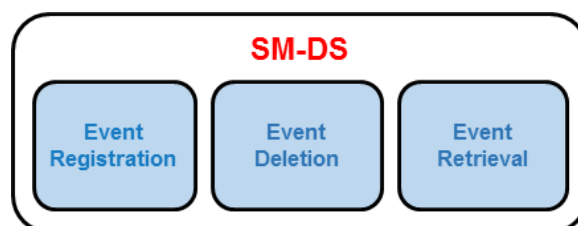


Figure 12: SM-DS Functions

Function name	Description
Event Registration	Process by which an Event Record received from a SM-DP+ is stored.
Event Deletion	Process by which an SM-DP+ can delete its own Event Record.
Event Retrieval	Provides all registered Event Records, upon Discovery Request from any enquiring LDS.

Table 25: SM-DS Function Descriptions

4.11.5 SM-DS Requirements

Req no.	Description
SMDS1	The SM-DS SHALL enable a LDS to discover its own Event Records registered by SM-DP+(s) or by Alternative SM-DS(s).
SMDS2	The SM-DS SHALL not be able to identify the nature of an Event. Note: The nature of the Event may be 'Profile Package available for download'.
SMDS3	All valid Discovery Requests and Event Registrations SHALL be processed in a non-discriminatory manner.
SMDS4	The SM-DS SHALL only accept Event Registrations from <ul style="list-style-type: none"> any authorised and authenticated SM-DP+(s) having a valid Certificate. any authorised and authenticated SM-DS(s) or SM-DS(s) having a valid Certificate.
SMDS5	The SM-DS SHALL only accept Discovery Requests authenticated by the corresponding eUICC via the LDS.
SMDS6	The SM-DS and the SM-DP+ as well as connected SM-DSs SHALL be mutually authenticated.
SMDS7	The SM-DS SHALL NOT have visibility of any data that may be used to compromise the End User's privacy.
SMDS8	The SM-DS SHALL support multiple concurrent Event Registrations per eUICC and SHALL present to the LDS all currently valid Event Records in the same order as they were received by the SM-DS (first in, first out).
SMDS9	The SM-DS only stores Event Records destined for specific EIDs.
SMDS10	Subscriber Specific data and Profile related contents SHALL NOT be stored within the SM-DS.
SMDS11	The SM-DS SHALL NOT allow the harvesting of any information such as Operator, EIDs, Device Manufacturers, Devices, etc.
SMDS12	The SM-DS SHALL only return to the LDS, the Event Records related to the served eUICC.
SMDS13	The SM-DS SHALL NOT have any contact with the Profile Packages e.g. SHALL NOT store or process any Profile Package.
SMDS14	The SM-DS SHALL provide the same data regardless of the status of the Device that queries it (i.e. consistent in time and in geographic location).
SMDS15	The SM-DS SHOULD NOT significantly impact the end-to-end provisioning time.
SMDS16	The SM-DS SHALL provide defence against DoS attacks.

Req no.	Description
SMDS17	All communications to, from and between entities of the SM-DS SHALL be encrypted.
SMDS18	The SM-DP+ SHALL be able to delete any of its own Event Records registered on the SM-DS.
SMDS19	An Alternative SM-DS SHALL be able to delete any of its own Event Records registered on the Root SM-DS (In response to an SM-DP+ delete operation defined in SMDS18).
SMDS20	An Alternative SM-DS SHALL propagate the Event Record to the Root SM-DS if requested by the SM-DP+.
SMDS21	If there are multiple Event Records registered on the SM-DS for one eUICC, these SHALL all be sent as a single response.
SMDS22	An SM-DP+ SHALL be able to send an Event Record to an LDS either by the Root SM-DS or via any alternative one selected by the SM-DP+. If the alternative is chosen the Event Record to the LDS SHALL come from this alternative SM-DS.
SMDS23	There SHALL be a unique Root SM-DS. Note: This requirement does not forbid the potential load-balancing of this Root SM-DS.
SMDS24	The Root SM-DS SHALL be managed by the GSMA.
SMDS25 (FFS)	It SHALL be possible for the Alternative SM-DS to conduct an Event Record Query to the Root SM-DS for the purpose of auditing Event Registrations it owns.
SMDS26 (FFS)	A SM-DS response to an Event Record Query SHALL only confirm Event Record existence and SHALL NOT include additional information.
SMDS27 (FFS)	An Alternative SM-DS SHALL be able to query the existence of an Event Record on the Root SM-DS, identified by the EID or the Event-ID over the ES15 interface.
SMDS28 (FFS)	Response to a SM-DS Event Record query SHALL only occur where the responder validates the Event Record ownership.
SMDS29 (FFS)	Ownership validation of a SM-DS Event Record Query SHALL only use the requester's address or the submitted Event-ID against the components of the Event Record held.
SMDS30 (FFS)	The SM-DS (Root or Alternative) MAY inform the SM-DP+ directly or via another SM-DS, that a Discovery Request from an authorised LDS has been answered by issuing an Event Record.
SMDS31 (FFS)	The SM-DS SHALL only inform the Event Record's owning SM-DP+ or SM-DS that it has replied to a Discovery Request.

Table 26 SM-DS Requirements

4.11.6 Event Registration/Deletion Procedure

The figure below shows the procedure for a deployment with the Root SM-DS and an Alternative SM-DS (cascade mode).

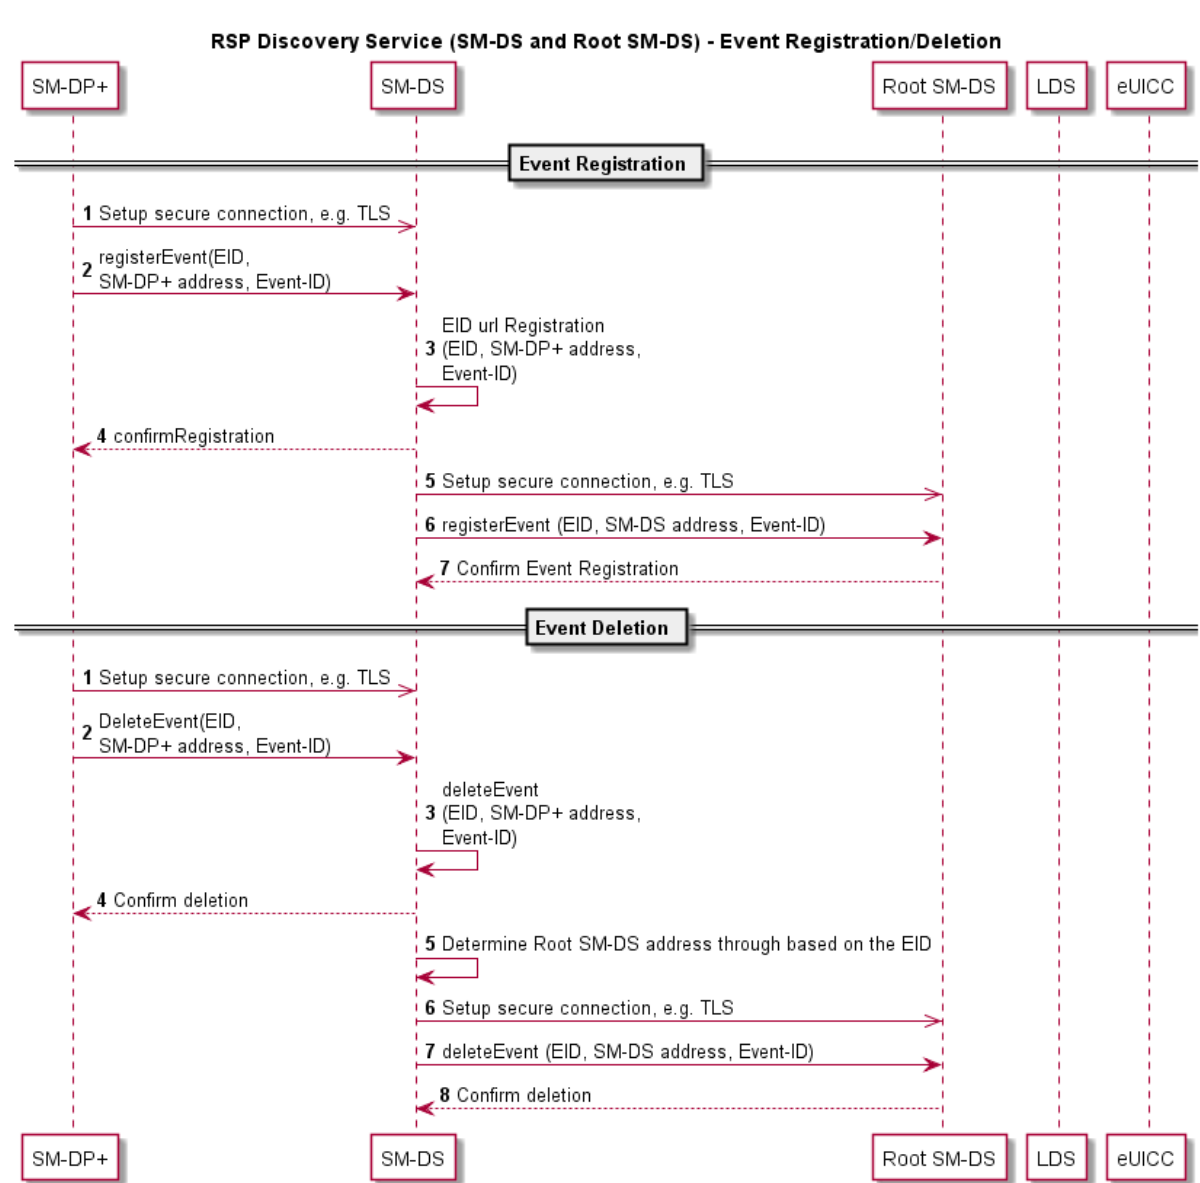


Figure 13: Event Registration/Deletion Procedure

Starting Condition:

- The SM-DP+ has an action waiting for a target eUICC identified by the EID.

Procedure:

1. The SM-DP+ establishes a secure connection to an Alternative SM-DS of the Profile Owner's choice.
2. The SM-DP+ notifies the Alternative SM-DS about a pending action.
3. to 4. The Alternative SM-DS registers and confirms the Event Registration.
5. The Alternative SM-DS establishes a secure connection to the Root SM-DS.
6. The Alternative SM-DS informs the Root SM-DS that for the given EID, an Event Record is waiting at the Alternative SM-DS.
7. The Root SM-DS confirms the receipt of the information.

4.11.7 Discovery Request Procedure

The figure below shows the procedure for a deployment with an Alternative SM-DS and the Root SM-DS (cascade mode).

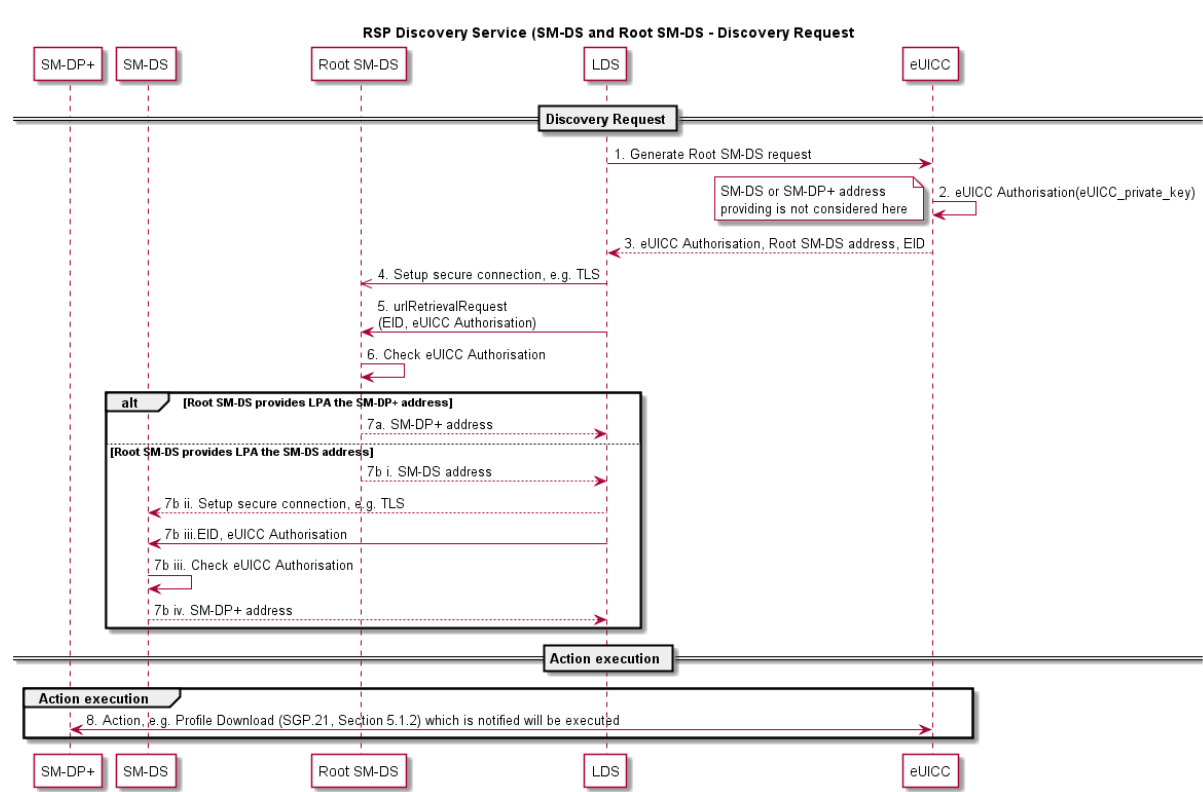


Figure 14: Discovery Request Procedure

Procedure:

1. to 3. In order to generate a Discovery Request, the LDS requests the eUICC to generate an eUICC Authorisation which contains (at least) the eUICC-Certificate and is signed by the eUICC.
4. to 5. The LDS establishes a secure communication to the Root SM-DS.
6. The Root SM-DS verifies the authenticity of the eUICC by checking the eUICC Authorisation.
7. In case the eUICC is authentic and an Event Record is waiting, it delivers back:
 - a. The address of the SM-DP+, where an action is waiting.
 - or
 - b. The rest of the following actions:

- i. The address of the Alternative SM-DS, where an Event Record can be retrieved.
 - ii. The LDS establishes a secure connection to the Alternative SM-DS.
 - iii. The Alternative SM-DS verifies the authenticity of the eUICC by checking the eUICC Authorisation.
 - iv. In case the eUICC is authentic and an Event Record has been received, it delivers back the address of the SM-DP+, where an action is waiting.
8. The LPA establishes a connection to the SM-DP+ and the waiting action can be performed.

4.12 Interfaces

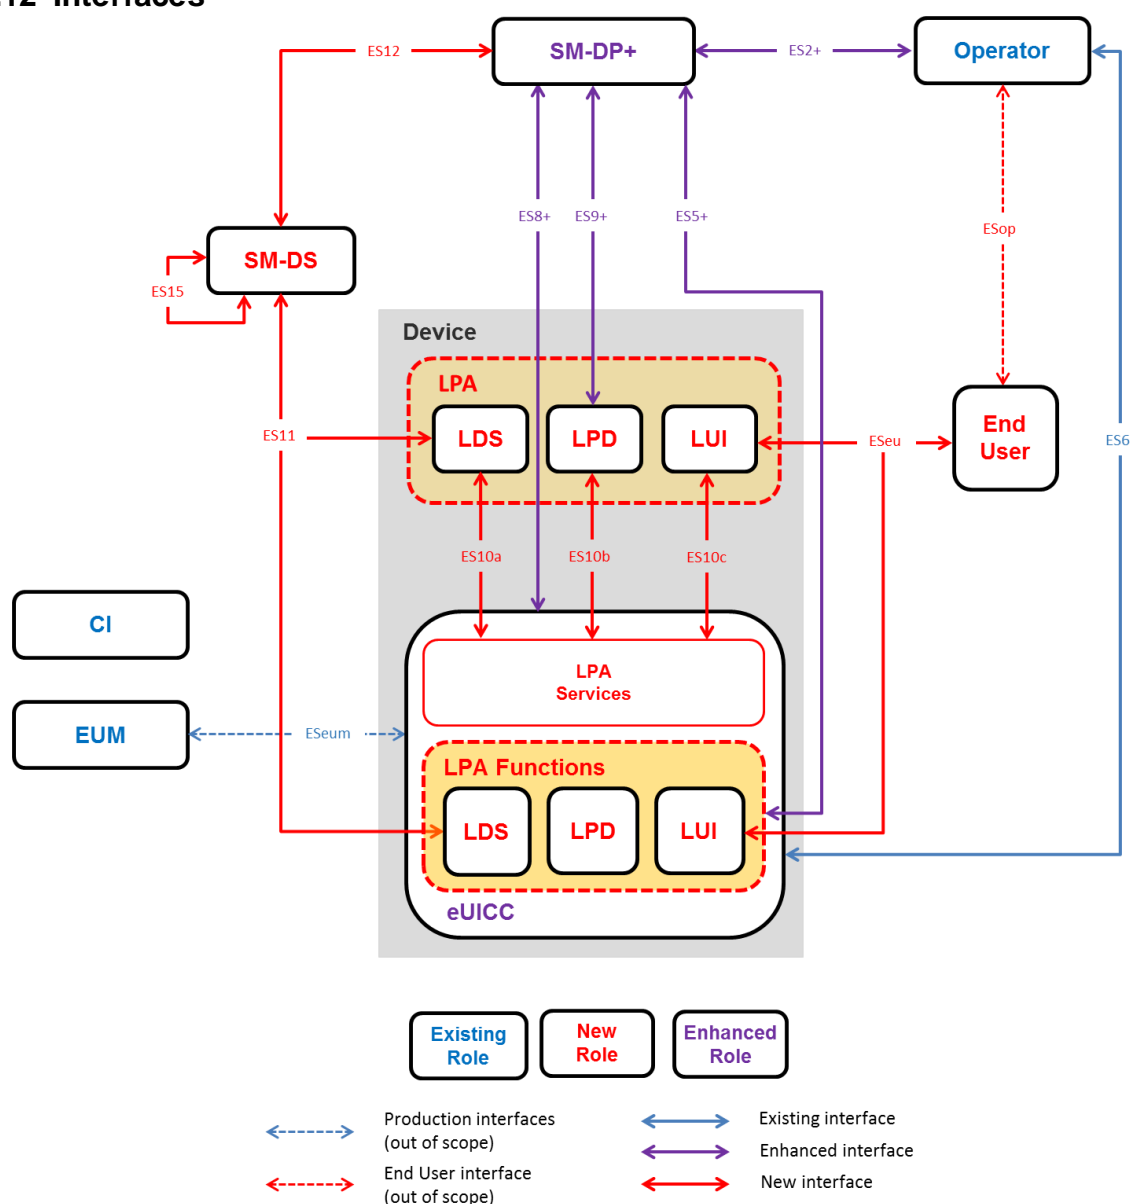


Figure 15: Interfaces on the eUICC Architecture with the LPA in the Device Configuration

4.12.1 Operator – SM-DP+ (ES2+)

The ES2+ interface is used by the Operator to order Profiles for specific eUICCs as well as other administrative functions.

4.12.2 Operator – End User (ESop)

This interface is out of scope of this specification.

4.12.3 End User - LUI (ESeu)

ESeu is the interface between the End User and the LUI.

In a Primary/Companion Device scenario the LUI used SHALL only reside within the Companion Device or its eUICC.

The ESeu interface is used to support the following requirements:

Req no.	Description
ESeu1	The Local Profile Management Operations SHALL be executed only over the ESeu interface.
ESeu2	Each Local Profile Management Operation SHALL be explicitly initiated by the End User, verified by User Intent.
ESeu3	The ESeu interface SHALL support the triggering and confirmation of the Profile download and installation operation.

Table 27: End User to LUI (ESeu) Interface Requirements

4.12.4 Operator – eUICC (ES6)

The ES6 interface is used by the Operator for the management of Operator services via OTA services.

4.12.5 SM-DP+ – LPA in the eUICC (ES5+)

The ES5+ interface is used to provide a secure transport between the SM-DP+ and the LPA in the eUICC for the delivery of the Bound Profile Package.

4.12.6 SM-DP+ – LPD in the Device (ES9+)

For Devices with an LPA, the ES9+ interface is used to provide a secure transport for the delivery of the Bound Profile Package between the SM-DP+ and the LPD.

4.12.7 SM-DP+ – eUICC (ES8+)

The ES8+ interface provides a secure end-to-end channel between the SM-DP+ and the eUICC for the administration of the ISD-P and the associated Profile during download and installation. It is an enhanced version of the existing ES8 interface, providing Perfect Forward Secrecy.

4.12.8 SM-DP+ – SM-DS (ES12)

The ES12 interface allows any SM-DP+ to issue or remove Event Registrations on the SM-DS.

4.12.9 LDS – SM-DS (ES11)

The ES11 interface allows the LDS to retrieve Event Records for the respective eUICC.

4.12.10 EUM – eUICC (ESeum)

This interface is out of scope of this specification.

4.12.11 LDS – LPA Services (ES10a)

The ES10a interface is used between the LDS in the Device and the LPA Services to request the eUICC Authorisation to generate a Discovery Request.

4.12.12 LPD – LPA Services (ES10b)

The ES10b interface is used by the LPD in the Device and the LPA services to transfer a Bound Profile Package to the eUICC.

4.12.13 LUI – LPA Services (ES10c)

The ES10c interface is used between the LUI in the Device and the LPA services for Local Profile Management by the End User.

4.12.14 SM-DS – SM-DS (ES15)

In the case of deployments with cascaded SM-DSs, the ES15 interface is used to connect the SM-DSs.

4.12.15 Device – SM-DP+ (Established Connection)

This connection will be provided either by:

- An internet connectivity available or provided on the same Device where the LPA resides
or
- An internet connection shared from another Device via a local go-between connection

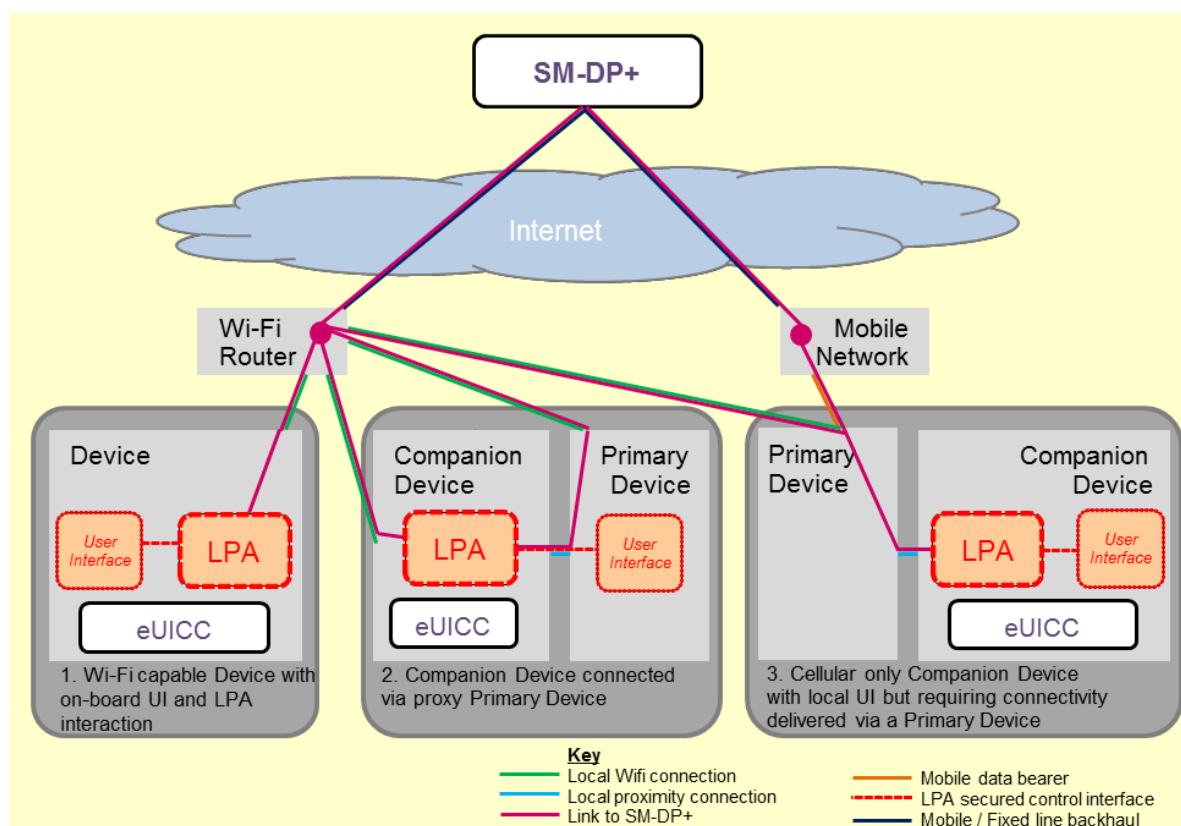


Figure 16: Example Connection Methods for Companion Devices to reach out to the SM-DP+

4.12.16 General Interface Requirements

Req no.	Description
INT1	All interfaces from the eUICC SHALL indicate the specification version number.
INT2	The behaviour of all interfaces SHALL support the indicated specification version number.
INT3	During the indication of the supported specification version number from the eUICC to the SM-DP+, the eUICC version SHALL be used or the procedure SHALL fail. See table below.
INT4	All communicating entities involved in Remote SIM Provisioning SHALL be mutually authenticated. The Device and the eUICC are considered as one entity in this context.

Table 28: General Interface Requirements

Platform	Version 1 (V1)	Version 2 (V2)	Version 3 (V3)
eUICC V1	Platform uses V1	Platform uses V1 or fails.	Platform uses V1 or fails.
eUICC V2	X	Platform uses V2	Platform uses V2 or fails.
eUICC V3	X	X	Platform uses V3

Table 29: eUICC Version vs Platform

4.13 Profile Policy Management

4.13.1 Introduction

The Profile Policy Management function provides mechanisms by which Service Providers are able to reinforce the conditions or policies (operational and business) under which services are provided to the Subscriber. In some instances this MAY also include the enforcement of the policies set by the Subscriber.

Profile Policy Management MAY also be applied with other already existing policy enforcement technologies which are also subject to agreement by the Subscriber.

The realisation of the Policy Management function is based on two key elements. The first element is the Profile Policy Enabler which is contained within the eUICC. The second element is a set of defined Profile Policy Rules which are required for the actual enforcement of specific policies.

4.13.2 Profile Policy Management Requirements

Policy no.	Description
POL1	A Profile Policy Rule SHALL only be configured within a Profile.
POL2	Each Profile MAY have Policy Rules associated to itself.
POL3	A Policy Rule SHALL only apply to the Profile that contains it.
POL4	Profile Policy Enforcement SHALL be consistent across implementations.
POL5	Profile Policy Enforcement SHALL be able to resolve any Profile Policy Rule conflict.
POL6	The updating of a Profile's Policy Rules SHALL be restricted to the Profile Owner.
POL7	The mechanism used for the update of a Policy Rule SHALL be atomic.
POL8	The set of Profile Policy Rules SHALL be extensible for future releases.
POL9	There SHALL be a Profile Policy Rule scheme to allow extensibility of the Policy Rules, e.g. described like 'operational command, scope of application, qualification'
POL10	A Profile Policy Rule SHALL be enforced whenever a Profile state change is attempted.
POL11	Downloading and installing a Profile with the Profile Policy Rule 'Do not disable' SHALL only be possible if no other Operational Profile is currently installed.
POL12	The LPA and the eUICC SHALL prevent the downloading and installation of a Profile containing Profile Policy Rules that conflict with the Profile Policy Rules of the already installed Profiles. Note: The technical specification SHALL describe exhaustively each conflict that MAY occur.
POL13	An Operator SHALL be able to deactivate the Profile Policy Rules of its Profile using the ES6 interface if the Profile is enabled. Note: The activation of Profile Policy Rules on the ES6 interface is FFS.

Policy no.	Description
POL14	Before a Profile is installed with Profile Policy Rules, the End User SHALL be able to be notified about the Profile Policy Rules and if notified, the installation SHALL thereafter be conditional on End User Authenticated Confirmation. This prompting may not be needed if the installation is directly allowed by the RAT.
POL15	The request for End User consent for the installation of Profile Policy Rules and Profile download MAY be combined into a single prompt therefore requiring a single confirmation by the End User.
POL16	Profile Policy Rules SHALL be enforced by the Profile Policy Enabler in the eUICC.
POL17	The Profile Policy Enabler SHALL only support the Profile Policy Rules defined in this specification.
POL18	The Profile Policy Enabler SHALL be capable of supporting all the Profile Policy Rules as defined in this specification.
POL19	POL RULE3 SHALL be enforceable in all cases with the exception of the enabling of a Provisioning Profile. Note: POL RULE3 is defined for use in specific use cases that have not yet been fully defined and is not applicable for this version of the specification.
POL20	Allowing the installation of a Profile with Profile Policy Rules SHALL be subject to compliance with local regulatory requirements.

Table 30: Profile Policy Principles

4.13.3 Policy Rules

Policy no.	Description
POL RULE1	The Profile Policy Rule 'Disabling of this Profile is not allowed' SHALL be supported.
POL RULE2	The Profile Policy Rule 'Deletion of this Profile is not allowed' SHALL be supported.
POL RULE3	The Policy Rule 'Deletion of this Profile is required upon its successful disabling' SHALL be supported. Note: POL RULE3 is defined for use in specific use cases that have not yet been fully defined and is not applicable for this version of the specification.

Table 31: Policy Rules Requirements

4.13.4 Profile Policy Enabler Requirements

Policy no.	Description
POLPPE1	The Rules Authorisation Table (RAT) SHALL be stored in the Profile Policy Enabler in the eUICC.
POLPPE2	The Profile Policy Enabler SHALL enforce the contents of the installed RAT, if any, only at Profile installation time.
POLPPE3	The RAT SHALL allow multiple Profile Owners to have Policy Rules enabled in their Profiles.

Policy no.	Description
POLPPE4	The RAT SHALL be able to support specific configurations which allow a set of or all Profile Policy Rules for any Profile Owner.
POLPPE5	The RAT SHALL only be installed at pre-issuance or during the initial Device setup provided there are no Operational Profiles installed.
POLPPE6	The RAT SHALL not be affected by the eUICC Memory Reset function.
POLPPE7	To support identifiable regulatory requirement, a RAT SHALL be able to support a specific configuration which MAY forbid any Profile Owner to set a specific Profile Policy Rule.
POLPPE8	If POLPPE7 is set, this information SHALL be part of the eligibility check information shared between the SM-DP+ and the eUICC.
POLPPE9	Where the RAT allows the Profile Policy Rules for the Profile being installed, installation SHALL proceed as stated in POL14.
POLPPE10	The RAT SHALL be able to support a setting to display the consequences of the Profile Policy Rules to the End User before installation of the Profile.
POLPPE11	The OEM or EUM SHALL be responsible for providing the RAT.
POLPPE12	A fixed RAT SHALL be implemented in the eUICC. Note: The allowed RAT configuration(s) are detailed in Annex H.

Table 32: Profile Policy Enabler Requirements

4.14 Certification

4.14.1 eUICC Certification

Req no.	Description
CERTEU1	The EUM SHALL be GSMA SAS certified 0.
CERTEU2	The EUM SHALL be required to declare eUICC product compliance with GSMA SGP.22 V2.0 0.
CERTEU3	The eUICC SHALL be certified according to the Protection Profile defined by the GSMA (TBD).
CERTEU4	The eUICC Protection Profile SHALL at least include the following elements: platform service manager, ISD-R, Profile storage and isolation of Profiles.
CERTEU5	The eUICC protection Profile SHALL be equivalent to the eUICC Protection Profile defined in SGP.05 0.
CERTEU6	The Evaluation Assurance Level of the eUICC Protection Profile SHALL be (at least) EAL4 augmented with AVA_VAN.5 and ALC_DVS.2 (EAL 4+) or equivalent. Note: A study needs to be performed in terms of assurance level by FASG.
CERTEU7	The eUICC public key Certificate used for authentication SHALL contain the EID.
CERTEU8	The eUICC public key Certificate(s) SHALL contain the technical reference of the product, for example the Common Criteria certification report number.
CERTEU9	The EUM Public Key Certificate(s) SHALL be signed by a GSMA CI.

Req no.	Description
CERTEU10	The eUICC Certificate(s) SHALL be signed by the EUM using its EUM Certificate (CERTEU9Error! Reference source not found.).

Table 33: eUICC Certification Requirements

4.14.2 Device Compliance

Req no.	Description
CERTDEV1	There SHALL be a compliance process for all parts of Local Profile Management implementations in accordance with the GSMA.

Table 34: Device Certification Requirement

4.14.3 SM-DP+ Certification

Req no.	Description
CERTDP1	The SM-DP+ provider SHALL be required to declare product (SM-DP+) compliance with GSMA SGP.22 V2.0 0.
CERTDP2	The SM-DP+ SHALL be certified according to GSMA SAS 0.
CERTDP3	SM-DP+ elements SHALL use Hardware Security Modules (HSM) for cryptographic related operations (key storage, derivation, cryptographic operations). Note: This is to be covered by the SAS document "HSM certified according to FIPS 140-2 level 3 or higher"
CERTDP4	The SM-DP+ SHALL implement privileges isolation (Log, Audit, Operation, and Administration).
CERTDP5	The SM-DP+ SHALL implement operating system hardening mechanisms.
CERTDP6	The SM-DP+ SHALL implement separation of control, user and administrative planes.
CERTDP7	The SM-DP+ SHALL use Multi-Factor Authentication and administration operation.
CERTDP8	SM-DP+ hard drives and backup mediums used for storing Profiles SHALL be ciphered.
CERTDP9	The private key of SM-DP+ Certificate used for mutual authentication with eUICC SHALL be protected and stored in HSM according to CERTDP3.
CERTDP10	The SM-DP+ SHALL implement rate-limiting mechanisms to mitigate against DoS attacks.
CERTDP11	The SM-DP+ SHALL log all Certificate authentication failures.
CERTDP12	The SM-DP+ Public Key Certificate(s) SHALL be signed by a GSMA CI.

Table 35: SM-DP+ Certification Requirements

4.14.4 SM-DS Certification

Req no.	Description
CERTDS1	The SM-DS provider SHALL be required to declare product compliance with GSMA SGP.22 0.
CERTDS2	The SM-DS SHALL be certified according to the relevant GSMA SAS.
CERTDS3	The SM-DS SHALL implement isolation of privileges (Log, Audit, Operation, Administration).
CERTDS4	The SM-DS SHALL implement operating system hardening mechanisms.
CERTDS5	The SM-DS SHALL implement separation of control, user and administrative planes.
CERTDS6	The SM-DS SHALL use Multi-Factor Authentication and administration operation.
CERTDS7	SM-DS hard drives and backup mediums SHALL be ciphered.
CERTDS8	The SM-DS Certificate SHALL be signed by a GSMA CI.

Table 36: SM-DS Certification Requirements

4.14.5 LPA Certification

Req no.	Description
CERTLPA1	There SHALL be a certification process for all the LPA elements communicating with Remote SIM Provisioning entities.
CERTLPA2	The certification process SHALL ensure that Local Profile Management Operations are sent by authorised LPA elements only.
CERTLPA3	The certification process SHALL ensure a mechanism exists to block compromised LPAs.
CERTLPA4	The LPD SHALL authenticate the SM-DP+ during the TLS session.
CERTLPA5	The LDS SHALL authenticate the SM-DS during the TLS session.
CERTLPA6	The LPA SHALL only accept Certificates signed by a GSMA CI for server authentication.

Table 37: LPA Certification Requirements

4.14.6 Public Key Certificates Management

Req no.	Description
CERTPK1	The eUICC SHALL verify the Public Key Certificate of the SM-DP+.
CERTPK2	The LPD SHALL verify the Public Key Certificate of the SM-DP+.
CERTPK3	The LDS SHALL verify the Public Key Certificate of the SM-DS.
CERTPK4	The LDS authentication of an SM-DS using an invalid Public Key Certificate SHALL fail (see CERTPK11), and on-going communication SHALL stop.
CERTPK5	The LPD authentication of an SM-DP+ using an invalid Public Key Certificate SHALL fail (see CERTPK11), and on-going communication SHALL stop.

Req no.	Description
CERTPK6	The SM-DP+ authentication of an eUICC using an invalid Public Key Certificate SHALL fail (see CERTPK11), and on-going communication SHALL stop.
CERTPK7	The eUICC authentication of an SM-DP+ using an invalid Public Key Certificate SHALL fail (see CERTPK11), and on-going communication SHALL stop.
CERTPK8	The GSMA CI SHALL revoke the Public Key Certificate of any entities (SM-DP+, SM-DS, EUM) if it is compromised (e.g. private key theft).
CERTPK9	The eUICC SHALL be able to support a set of GSMA CIs.
CERTPK10	<p>A Public Key Certificate SHALL be considered as valid if:</p> <ul style="list-style-type: none"> • it has a valid signature • it is signed by a GSMA CI, or a trusted chain of Certificates up to a GSMA CI. Certificate Path validation SHALL follow the process defined in RFC 5280 00. • it has not been revoked, and no Certificate in the trust chain has been revoked • it has not expired <p>If any of these applicable verifications fail, the Public Key Certificate SHALL be considered as invalid.</p>
CERTPK11	The eUICC, LPA, SM-DS and SM-DP+ SHALL have knowledge of revoked Public Key Certificates.

Table 38: Public Key Certificates Management Requirements

5 Operational Procedures

5.1 LPA Initiated Download

5.1.1 LPA Initiated Download Requirements

Req no.	Description
LID1	The LPA SHALL use any Root SM-DP+ or default SM-DS address populated on the eUICC if it has not been provided already by the Activation Code.
LID2	In the context of LID1, if both a Root SM-DP+ and a default SM-DS address are populated, the LPA SHALL first contact the SM-DP+ and then SM-DS to initiate a Remote SIM Provisioning transaction.

Table 39: LPA Initiated Download Requirements

5.1.2 LPA Initiated Download Procedure

This following procedure describes the Events that are part of the Profile Package download and installation procedure initiated by the LPA.

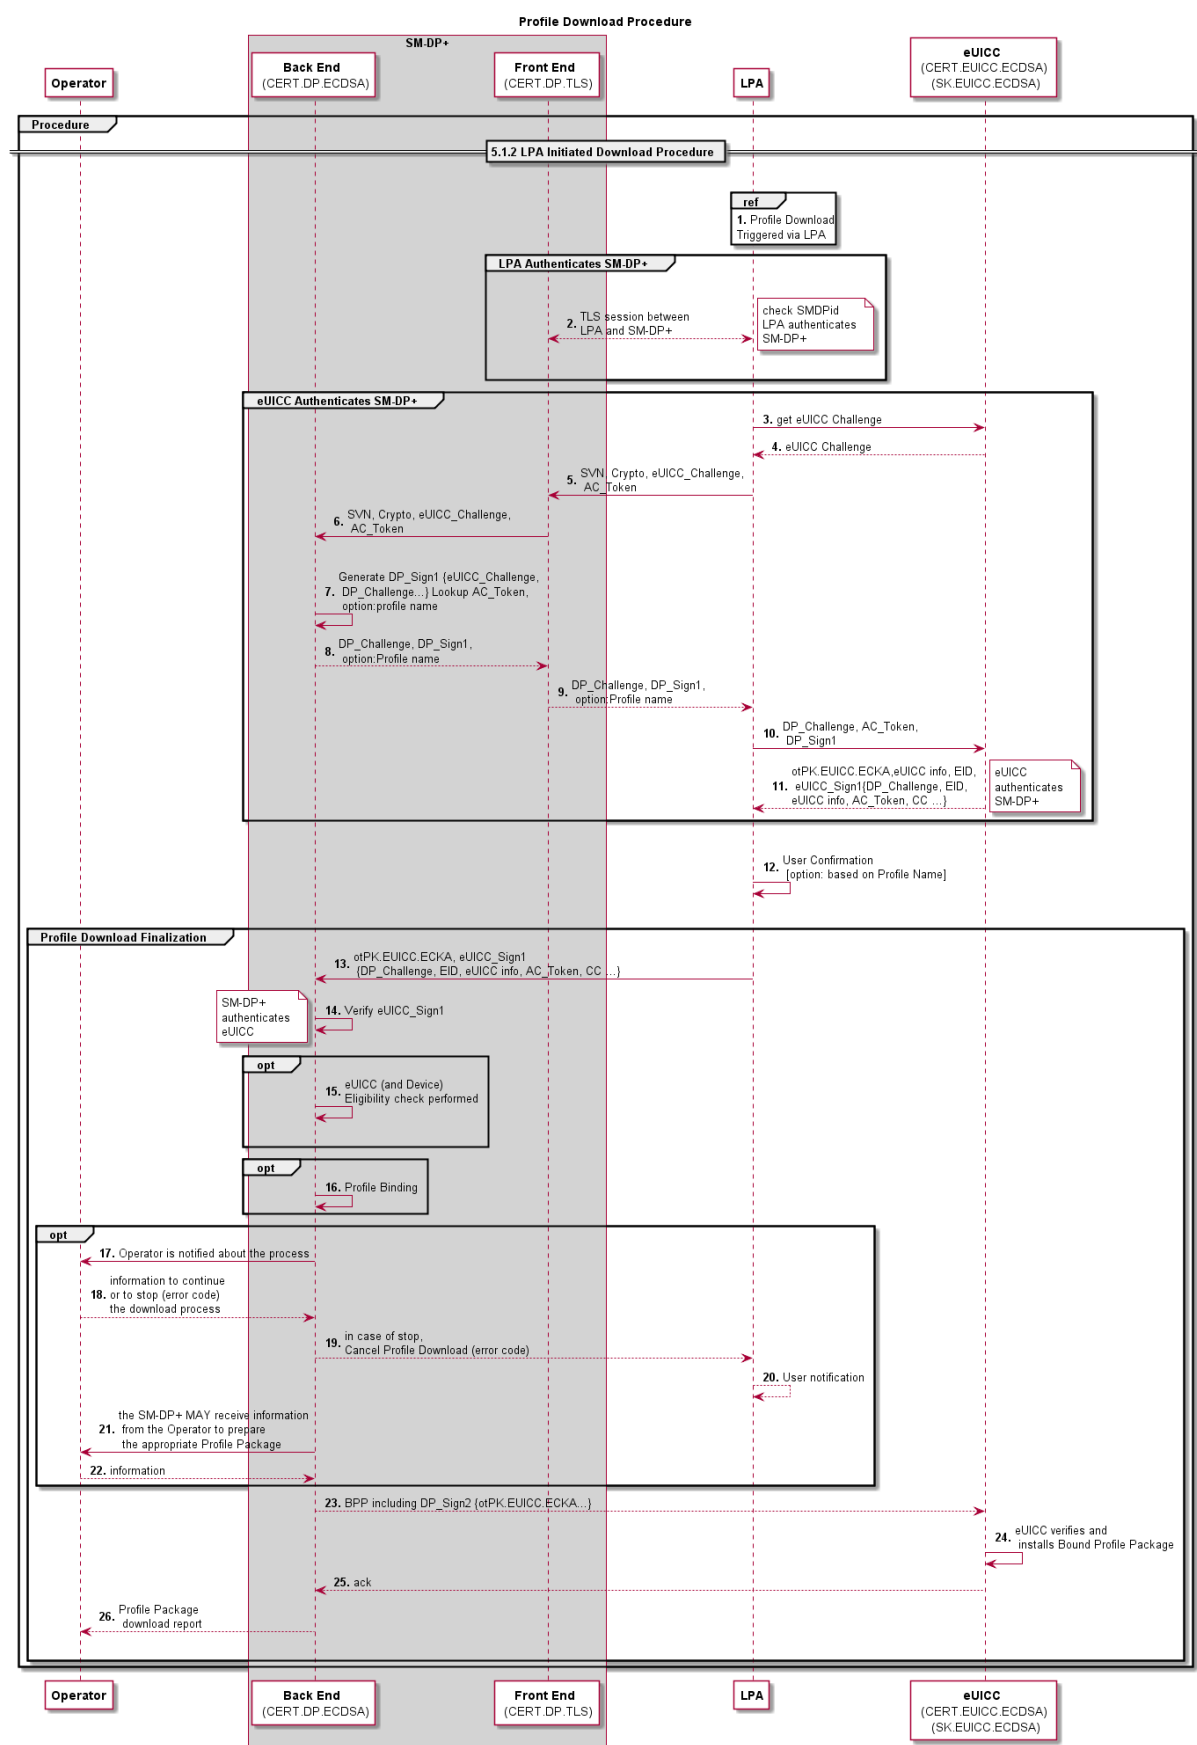


Figure 17: Profile Download Procedure

Start conditions:

- a. The Subscriber has completed the Subscription process to the selected Operator/Service Provider offer.
- b. The Profile ordering process related to this Subscription has been completed (i.e. an assigned Protected Profile Package is stored on the SM-DP+).

Procedure:

1. The LPA initiates Profile Package download and identifies the address of the SM-DP+ where the Profile is stored and available for download (via e.g. URL, QR code, manual input, etc) as well as other information provided (e.g. Token, SMDPId, Confirmation Code).
2. The LPA authenticates the SM-DP+ through establishing a TLS connection with the SM-DP+, and verifying the SMDPId if such information has been provided.
3. to 4. The LPA gets an eUICC challenge
5. to 6. The LPA sends the eUICC challenge and any other relevant information to the SM-DP+.
7. to 9. The SM-DP+ signs the eUICC challenge, and generates a DP_Challenge to be sent back to the eUICC.
10. The LPA sends the material received by the SM-DP+ and the AC Token to the eUICC; the eUICC checks the SMDPId and authenticates the SM-DP+.
11. The eUICC sends back a signed set of information including the DP_Challenge, the AC Token, the EID and its Certificate to the LPA.
12. The End User confirms the download of the Profile, optionally with the display of the Profile name of the Operator.
13. The LPA sends the set of information received in Step 11 from the eUICC to the SM-DP+.
14. The SM-DP+ verifies the signature; the eUICC is authenticated.
15. to 16. OPTIONAL: The eUICC Eligibility Check and Profile binding functions are performed by the SM-DP+.
- 17. to 22. OPTIONAL**
17. The Operator is notified about the Profile Package that is about to be downloaded.
18. If the Operator has been notified, it MAY request to stop the download process by indicating an error code to the SM-DP+.
19. If the Operator sends an error code to the SM-DP+, the SM-DP+ stops the download process and indicates the error code to the LPA.
20. The LPA notifies the End User with an appropriate message.
21. to 22. The SM-DP+ MAY receive information from the Operator to prepare the appropriate Profile Package.
23. to 25. The Bound Profile Package is sent to the eUICC and installed on the eUICC.
26. The Profile Package download report is sent from the SM-DP+ to the Operator.

End Condition:

- a. The Profile is installed in the eUICC in a Disabled state

5.2 Profile Download with Activation Code

5.2.1 Activation Code Requirements

Req no.	Description
AC1	Where used, the Activation Code SHALL trigger the download of a Bound Profile Package from a specific SM-DP+.
AC2	The Activation Code SHALL comprise of the following parameters: <ul style="list-style-type: none"> • SM-DP+ address • Activation Code Token (Includes OPTIONAL Confirmation Code Required Flag) • SMDPid (OPTIONAL)
AC3	The Activation Code Token SHALL be able to include a parameter indicating whether a Confirmation Code is required or not. If such a Confirmation Code is required, the LPA SHALL ask the End User to input a Confirmation Code. The SM-DP+ SHALL verify the Confirmation Code before delivering the Bound Profile Package. Note: How the Confirmation Code is created and provided to the End User is out of scope of this specification.
AC4	The Activation Code SHALL be verified by the SM-DP+ before delivering the Bound Profile Package.
AC5	The Activation Code input in the LPA by the End User SHALL support at least manual typing and QR code scanning.
AC6	All Activation Code procedures SHALL be implemented natively as part of the LPA.
AC7	The Activation Code procedure SHALL conditionally be automatically offered to the End User during initial Device set-up. This automatic setting SHALL NOT apply if a Profile is already provisioned. No Authenticated Confirmation is required. Note: For example this could be inappropriate from an open market cellular-enabled notebook computer.
AC8	Following the Activation Code procedure, the Profile Package download procedure SHALL be used.
AC9	The Activation Code procedure SHALL preserve eco-system security, privacy and validation of User Intent.
AC10	The Activation Code procedure SHALL be used for the sole purpose of downloading a Profile package to the targeted eUICC. The Activation Code procedure SHALL prevent sending IMEI and EID information to a non-authenticated SM-DP+.
AC11	The Activation Code SHALL uniquely identify the Operator/Service Provider.
AC12	The Activation Code request to the SM-DP+ SHALL be extended by the LPA with the EID after the specific SM-DP+ has been authenticated.

Table 40: Activation Code Requirements

5.2.2 Profile Download with Activation Code Procedure

The Activation Code procedure defines a common functionality which allows the Subscriber or the End User on behalf of the Subscriber to “activate” a Device by means of requesting the download of an Operational Profile from the Device itself.

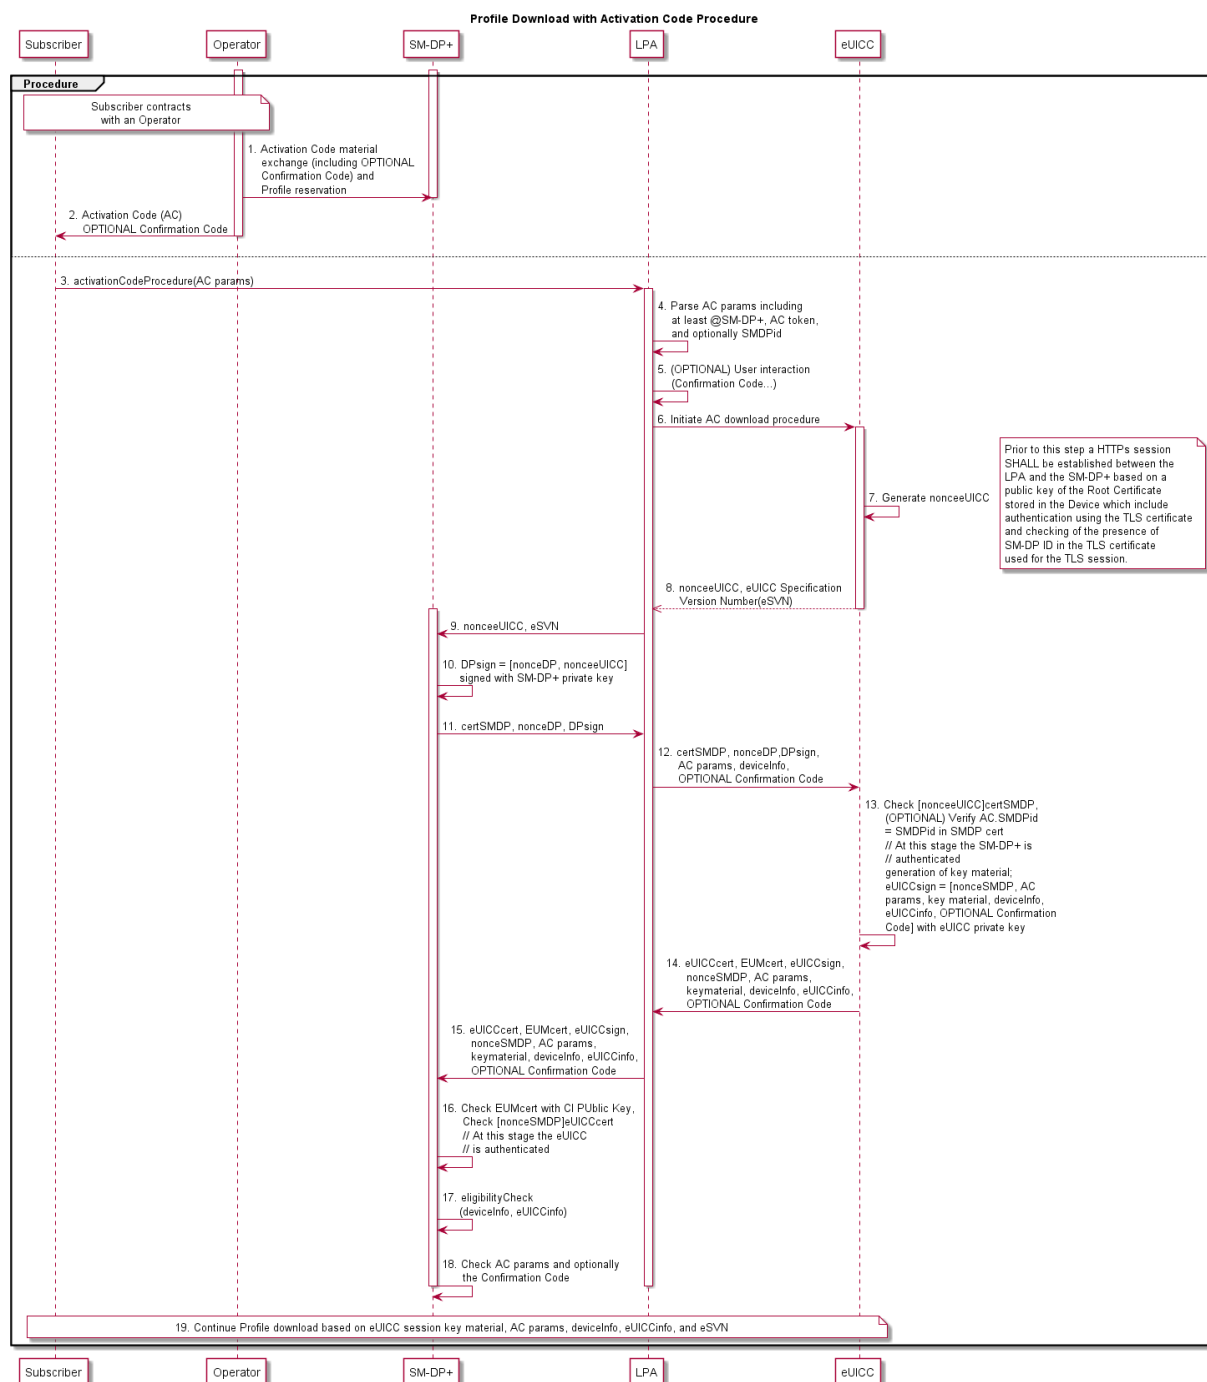


Figure 18: Profile Download with Activation Code Procedure

Start Conditions:

- A Subscription has been established by the Subscriber.
- An Activation Code has been provided to the End User and optionally a Confirmation Code (side channel).

Procedure:

1. The End User inputs the Activation Code to the LPA through the LUI.
2. The LPA parses the Activation Code parameters to recognise the SM-DP+ address, the Activation Code Token, the LPA Mode and optionally the SMDPid. In addition, the LPA MAY parse in the Activation Token the information that a Confirmation Code is required.
3. If the Confirmation Code parameter in the Activation Code Token is set to "require Confirmation Code", the End User is prompted to input a Confirmation Code provided to them by the issuing Operator/Service Provider.
4. The Activation Code download procedure is initiated by the LPA. The LPA requests a nonceeUICC from the eUICC.
5. The eUICC creates a nonceeUICC associated with the supported eUICC specification version number (eSVN).
6. The eUICC transmits the nonceeUICC associated with the supported eSVN to the LPA.
7. The LPA sends the nonceeUICC associated with the supported eSVN to the SM-DP+.

Note: Prior to this step a HTTPs session SHALL be established between the LPA and the SM-DP+ based on a public key of the Root Certificate stored in the Device which includes authentication using the TLS Certificate and checking for the presence of the SMDPid in the TLS Certificate used for the TLS session.

8. Upon receiving the nonceeUICC and the associated eSVN, the SM-DP+ creates nonceSMDP and signs both the nonceSMDP and the nonceeUICC.
9. The SM-DP+ sends the signed nonceeUICC and nonceSMDP to the LPA.
10. The LPA collects the Activation Code parameters as well as the Device information needed for the eligibility procedure and optionally the Confirmation Code and transmits them with the signed nonceeUICC and nonceSMDP to the eUICC.
11. The eUICC checks the signature attached to the nonceeUICC. If the SMDPid is configured in the AC, the eUICC checks that the SMDPid provided by the LPA and the SMDPid in the SM-DP+ Certificate correspond. The SM-DP+ is at this stage authenticated by the eUICC. The eUICC generates key material that will be used for the session key establishment. The eUICC signs a set of information with the eUICC private key which includes:
 - a. The nonceSMDP
 - b. Key material created by the eUICC to calculate session keys for the preparation of the Bound Profile Package
 - c. Activation Code parameters
 - d. The Device and eUICC information
 - e. Optionally the Confirmation Code
12. The eUICC sends the signed set of information to the LPA in addition to:
 - a. The nonceSMDP
 - b. Key material created by the eUICC to calculate session keys for the preparation of the Bound Profile Package
 - c. Activation Code parameters

- d. The Device and eUICC information
- e. The eUICC Certificate which includes the EID
- f. The EUM Certificate
- g. Optionally the Confirmation Code
- 13. The LPA sends the whole set of information received from the eUICC to the SM-DP+.
- 14. The SM-DP+ checks the EUM Certificate with the CI Public Key. The SM-DP+ checks the signature of the nonceSMDP; the eUICC is at this stage authenticated by the SM-DP+.
- 15. The SM-DP+ proceeds with the eligibility check based on the transmitted information (EID, Device information, eUICC information, eSVN).
- 16. The SM-DP+ checks the Activation Code parameters and optionally the Confirmation Code to retrieve the referenced Profile Package.
- 17. The Profile Package is downloaded to the eUICC:
 - a. The SM-DP+ establishes session keys with the eUICC.
 - b. A Bound Profile Package is prepared on the basis of the eUICC session key material and is downloaded and installed on the eUICC.
 - c. Successful installation of the Profile on the eUICC is acknowledged and the Operator is notified by the SM-DP+.
 - d. Successful installation of the Profile on the eUICC is acknowledged by the eUICC to the LPA which notifies the End User of the status.

End Conditions:

- a. A Bound Profile Package has been downloaded and installed on the eUICC in a Disabled state.
- b. The LPA MAY offer the Profile for enablement by the End User.

5.3 Local Profile Management

5.3.1 Local Profile Management Procedures

5.3.1.1 Enable Profile

This procedure performs the enabling of a target Profile. The request is given by the End User to the LPA.

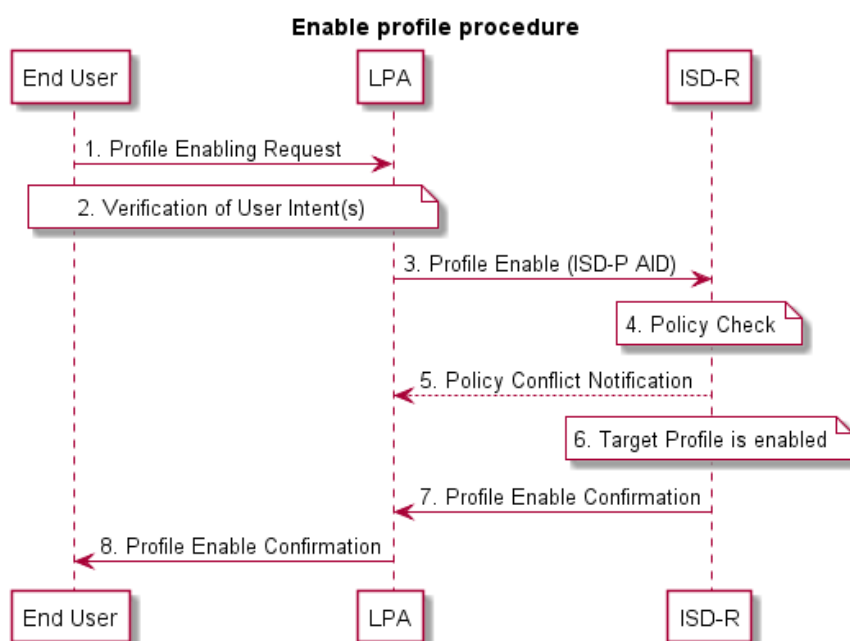


Figure 19: Enable Profile Procedure

Start conditions:

- a. The target Profile is disabled on the eUICC.
- b. The target Profile has been chosen by the End User.
- c. The LPA is authenticated to the eUICC as legitimate for performing Local Profile Management.

Procedure:

1. The End User makes a Profile enable request on the LPA.
2. User Intent is verified.
3. The LPA sends a Profile enable operation for the target Profile to the ISD-R on the eUICC.
4. The ISD-R checks if applied Policy Rules on the target Profile permits the Profile to be enabled
5. If there is a conflict with Policy Rules, the ISD-R aborts the procedure and informs the End User via the LPA.
6. The target Profile is enabled.
7. The ISD-R informs the LPA of the enabling of the Profile.
8. The End User is informed via the LPA.

End conditions:

- a. The target Profile is enabled.

5.3.1.2 Disable Profile

Profile disabling can be achieved with the following procedure. The request is given by the End User on the LPA.

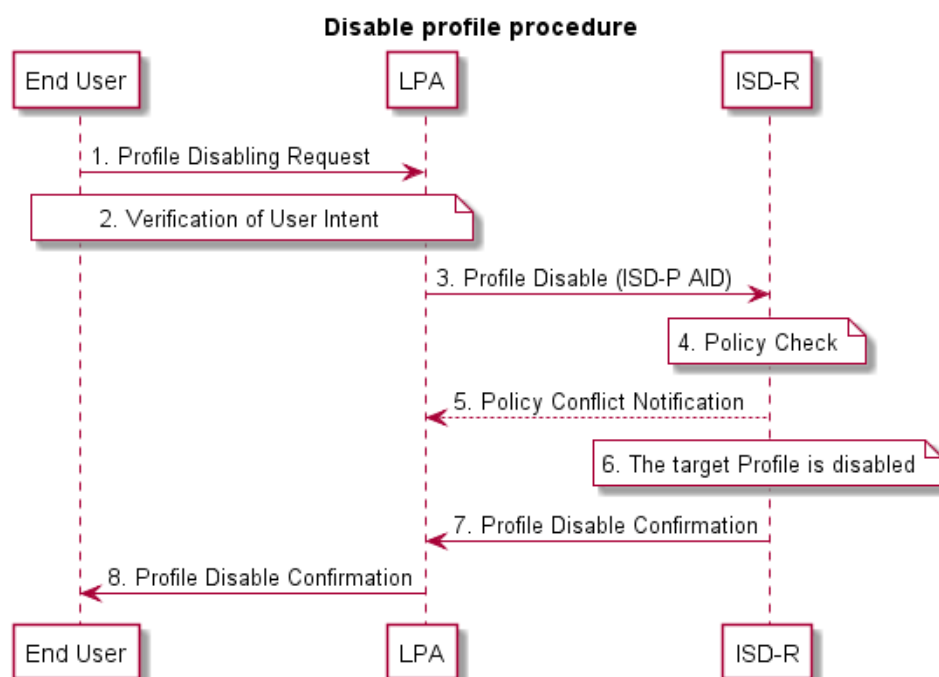


Figure 20: Disable Profile Procedure

Start conditions:

- a. The target Profile is enabled on the eUICC.
- b. The target Profile has been chosen by the End User.
- c. The LPA is authenticated to the eUICC as legitimate for performing Local Profile Management.

Procedure:

1. The End User makes a Profile disable request on the LPA.
2. User Intent is verified.
3. The LPA sends a Profile disable operation to the ISD-R on the eUICC.
4. The ISD-R checks if applied Policy Rules on the target Profile permits the Profile to be disabled.
5. If there is a conflict with Policy Rules, the ISD-R aborts the procedure and informs the End User via the LPA.
6. The ISD-R disables the target Profile.
7. The ISD-R informs the LPA of the disabling of the Profile.
8. The End User is informed via the LPA.

End conditions:

- a. The target Profile is disabled.

5.3.1.3 Delete Profile

Profile deletion can be achieved with the following procedure. The request is given by the End User on the LPA.

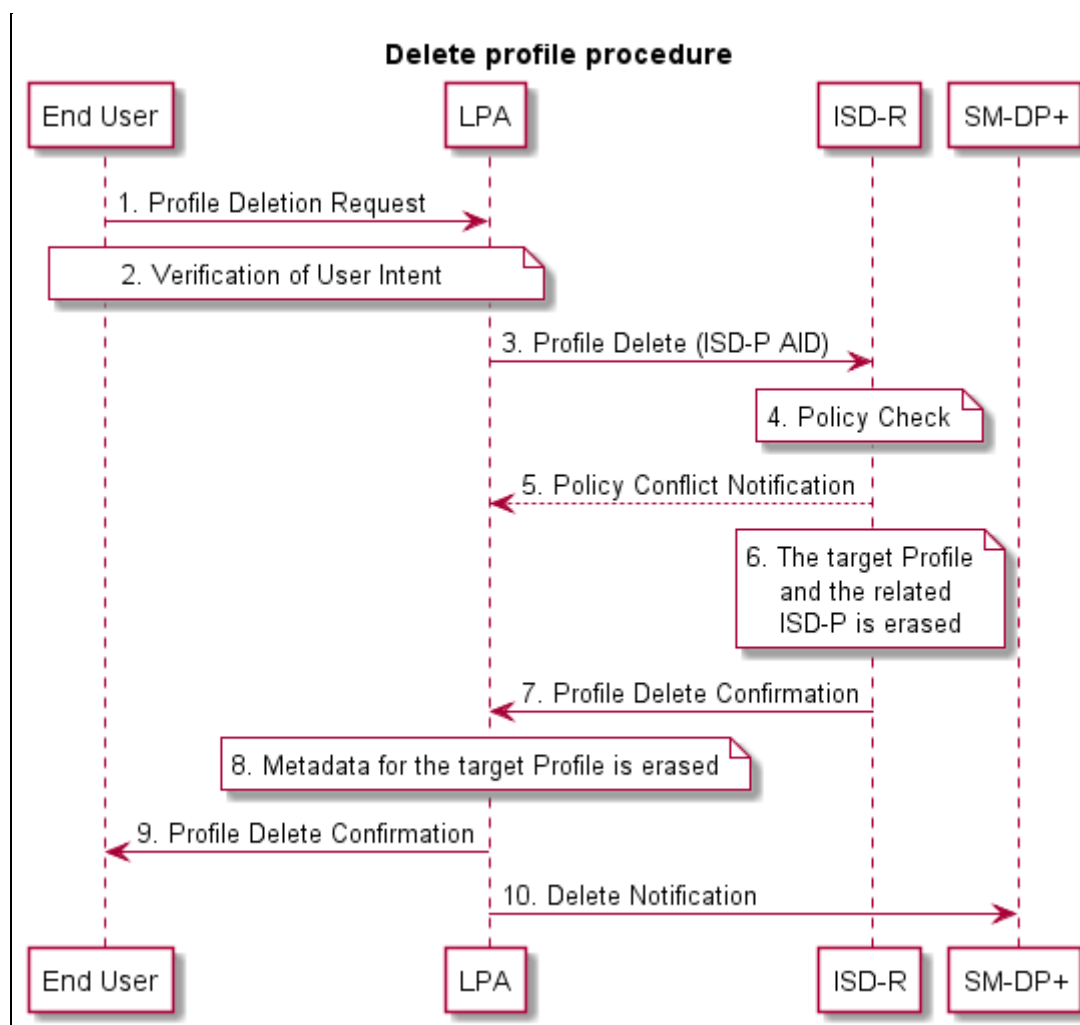


Figure 21: Delete Profile Procedure

Start conditions:

- The target Profile is disabled.
- The target Profile has been chosen by the End User
- The LPA is authenticated to the eUICC as legitimate for performing Local Profile Management.

Procedure:

- The End User makes a Profile deletion request on the LPA.
- User Intent is verified.
- The LPA sends a Profile deletion operation for the target Profile to the ISD-R on the eUICC. The request includes the ISD-P AID of the target Profile.
- The ISD-R checks if applied Policy Rules permits the Profile to be deleted.
- If there is a conflict with Policy Rules, the ISD-R aborts the procedure and informs the End User via the LPA.
- The ISD-R erases the target Profile and the related ISD-P.

7. The ISD-R informs the LPA of the Profile deletion.
8. The Metadata for the target Profile is erased.
9. The End User is informed via the LPA.
10. The LPA sends a delete Notification to the SM-DP+ that originally installed the Profile.

End conditions:

- a. The target Profile is deleted.

5.3.1.4 Add/Update Profile Nickname

Add/update nickname will allow the Subscriber or End User to attribute a nickname to a Profile for ease of use. Note that adding or changing a nickname SHALL NOT affect any other data or other Metadata for that Profile.

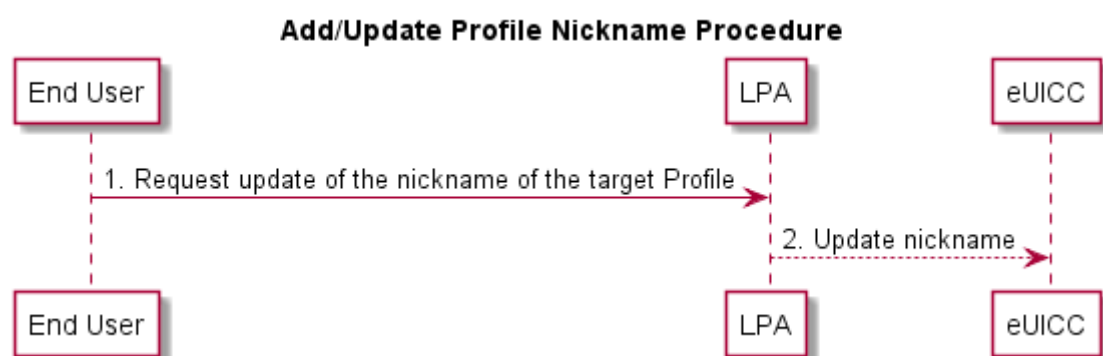


Figure 22: Add/Update Profile Nickname Procedure

Start conditions:

- a. User Intent has been verified.
- b. The target Profile has been chosen by the End User.
- c. The LPA is authenticated to the eUICC as legitimate for performing Local Profile Management.

Procedure:

1. The End User requests the update of the nickname on the LPA.
2. The LPA updates the Metadata of the target Profile with the End User's choice of nickname in the eUICC.

End conditions:

- a. Metadata of the target Profile has been updated with the End User's choice of nickname.

5.3.1.5 Query Profile Metadata

This procedure will allow the End User to query the Metadata of the Profiles accessible to the End User. The result SHALL display all (or parts of) the Metadata for the selected Profile on the eUICC at the time of querying. No changes are made to any data on the eUICC as a result of this procedure.

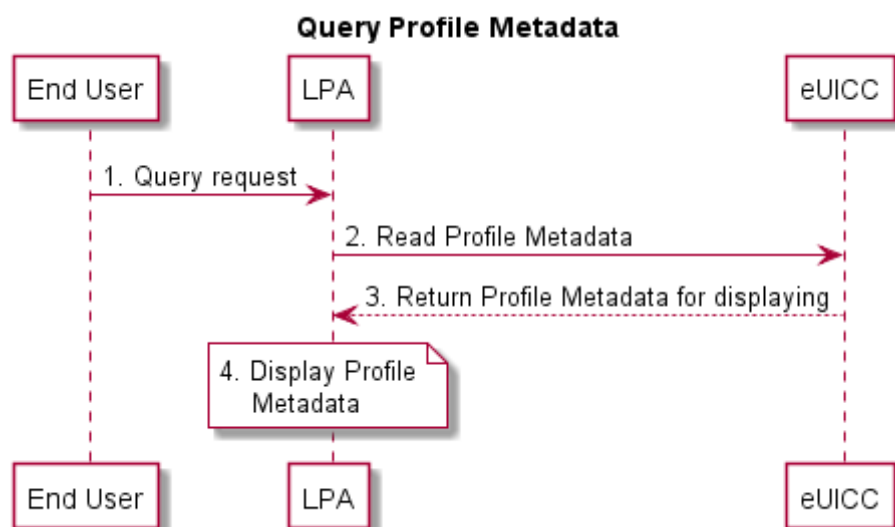


Figure 23: Query Profile Metadata Procedure

Start conditions:

- a. The LPA is authenticated to eUICC as legitimate for performing Local Profile Management.
- b. The list of Profiles accessible to the End User is displayed by the LPA(LUI).

Procedure:

1. The End User selects a Profile to query.
2. The LPA receives a query request from the End User.
3. The LPA requests Profile Metadata from the eUICC.
4. The LPA displays the Profile Metadata to the End User on the LUI.

End conditions:

- a. No change to Profile Metadata.

5.3.1.6 eUICC Memory Reset

This procedure performs the eUICC Memory Reset of the eUICC including its associated Profile Metadata. The request is given by the End User to the LPA.

Note: A similar procedure will apply to perform the eUICC Test Memory Reset of the eUICC.

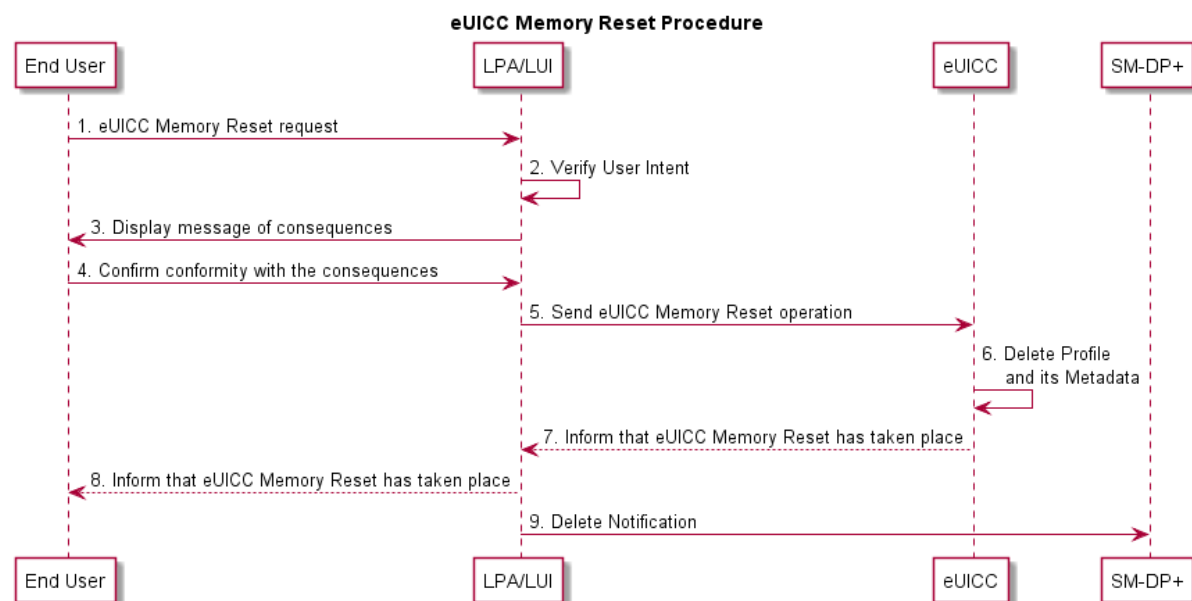


Figure 24: eUICC Memory Reset Procedure

Start conditions:

- a. The LPA is authenticated to the eUICC as legitimate for performing Local Profile Management.
- b. The eUICC Memory Reset option is displayed by the LPA (LUI).

Procedure:

1. The End User makes an eUICC Memory Reset request on the LPA (LUI).
2. User Intent is verified.
3. The LPA (LUI) displays a message of consequences of 'eUICC Memory Reset' to the End User.
4. The End User confirms the conformity with the consequences to the LPA.
5. The LPA sends an eUICC Memory Reset operation to the eUICC.
6. The eUICC deletes the Profile on the eUICC even if it is an Enabled Profile including the Metadata associated with it.
7. The eUICC informs the LPA of the eUICC Memory Reset of the eUICC.
8. The End User is informed via the LPA (LUI).
9. The LPA sends a delete Notification to each SM-DP+ that originally installed the Profile.

End conditions:

- a. The Profile is deleted from the eUICC.

5.3.1.7 Add Profile with Activation Code

This procedure will allow the Subscriber to add a single Profile. This procedure will not enable the downloaded Profile, nor disable an Enabled Profile. Network connectivity is assumed. The download can be initiated by the input of an Activation Code.

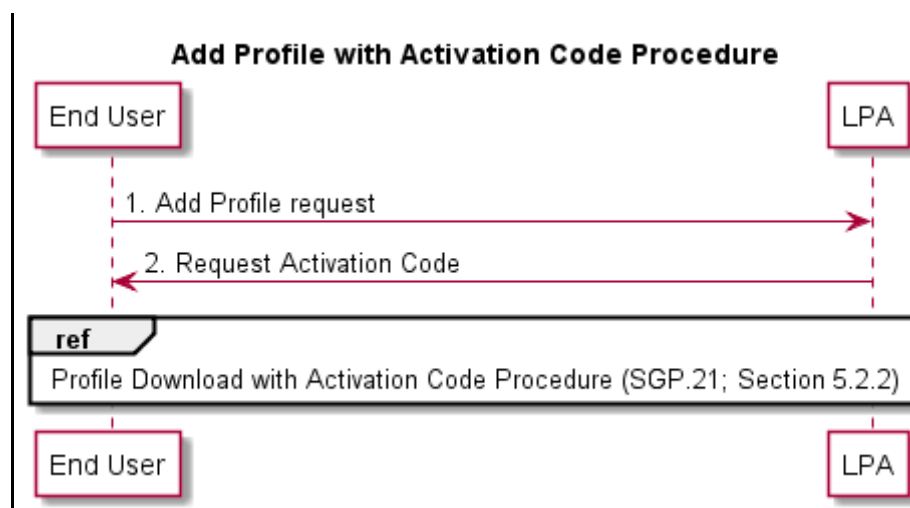


Figure 25: Add Profile with Activation Code Procedure

Start conditions:

- a. User Intent has been verified.
- b. The download of a new Profile is allowed on the eUICC.
- c. The LPA is authenticated to the eUICC as legitimate for performing Profile download.

Procedure:

1. The End User obtains an Activation Code to add a Profile to their Device.
2. The LPA requests the End User to enter the Activation Code.
3. Profile Download with Activation Code Procedure as described in Section 5.2.2 starts.

End conditions:

- a. The Profile has been installed on the End User's Device.
- b. Profile Metadata has been updated from the Profile.

5.3.1.8 Edit SM-DP+ Address

This procedure will allow the End User to edit a default SM-DP+ address on to the eUICC.

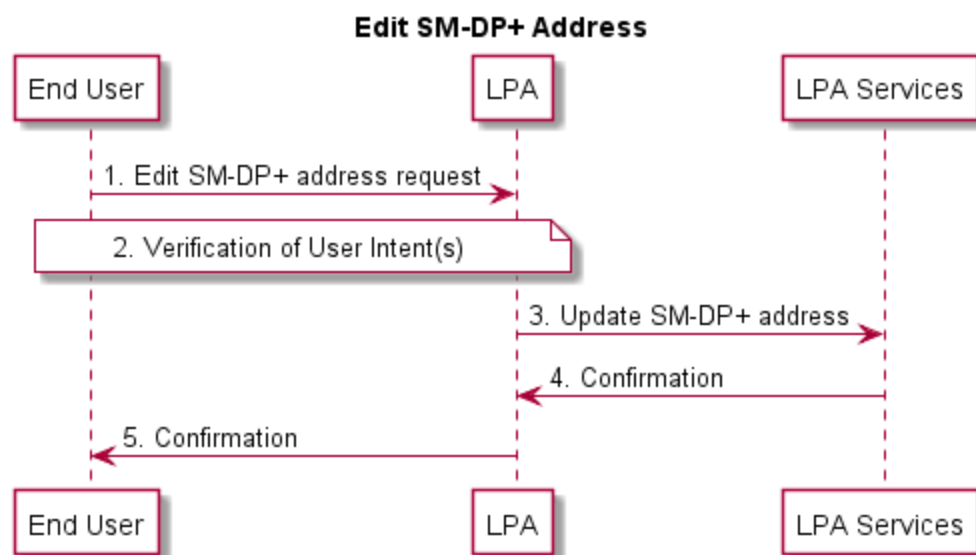


Figure 26: Edit SM-DP+ Address

Start conditions:

- a. There is a default SM-DP+ address in the LPA.
- b. The End User is willing to edit the default SM-DP+ address

Procedure:

1. The End User edits the SM-DP+ Address via the LPA.
2. Simple Confirmation from the User is required.
3. The LPA sends the default SM-DP+ address for storage in the LPA Service.
4. The LPA Service informs the LPA of the storage of the default SM-DP+ address.
5. The End User is informed via the LPA.

End conditions:

- a. The target default SM-DP+ Address is edited in the LPA Services.

Annex A Security Threats, Risks and Creation Process Requirements (Informative)

New Profile on New Primary Device (Off Device Activation)

Risk no.	Risk description
INI1	Incomplete or corrupted Profile being pushed to the Subscriber.
INI2	Malicious eUICC party using privileged position in order to push unsolicited Profiles to Devices.

Table 41: New Profile on New Primary Device Risks

Profile Deletion

Risk no.	Risk description
IND1	Long term gathering of key materials due to a long term storage of delivered Profiles after their disabling.
IND2	Loss of sensitive data from discarded media supports (hard drives...)
IND3	Malware launching coordinated or isolated deletion of one or several Profiles leading to a loss of connectivity to an End User.
IND4	Accidental Profile deletion (e.g. unattended children...) leading to a loss of connectivity to an End User.
IND5	Non-tech-sawy or malicious Subscriber repeatedly deleting Profiles and asking for them to be reloaded leading to surcharge of provisioning servers.

Table 42: Profile Deletion Risks

Profile Switch

Risk no.	Risk description
INP1	Malicious Profile switching originating from an internal party.
INP2	Human error leading to the switching of alternate Profiles leading to a loss of connectivity.
INP3	Malware launching coordinated or isolated switching of one or several Profiles leading to a loss of connectivity.
INP4	Malware launching coordinated or isolated switching of one or several Profiles leading to major fraud scenarios.

Table 43: Profile Switching Risks

Profile Swap

Risk no.	Risk description
INS1	Race condition leading to the deactivation of all Profiles and a loss of connectivity.

Table 44: Profile Swapping Risks

Cryptographic Related Risks

Risk no.	Risk description
INO1	Loss or theft of private keys in one or several Profile Management components leading to the loss of confidentiality on the whole chain.
INO2	Inability to revoke compromised Certificates leading to the loss of trust on the whole Certificate chain.
INO3	Local law enforcement requests leading to the forceful disclosure of key materials.
INO4	Local law enforcement requests leading to the forceful compromise of key components.
INO5	Malicious or accidental revocation of Certificates leading to the denial of service on the whole provisioning Certificate chain.
INO6	Use of temporary symmetric cryptographic or “generic” key material during the Profile creation, temporary storage, transport, or long-term storage leading to single point of failure and attack being created.

Table 45: Cryptographic Related Risks

Quality of Service

Risk no.	Risk description
QoS1	Profile creation burst leading to the inability for the eUICC platforms to deliver expected service level.
QoS2	Denial of service on delivery platforms leading to the inability to deliver expected service level.
QoS3	Inability to recover from management communication failures leading to a temporary or permanent inability to deliver a Profile.

Table 46: Quality of Service Risks

Non-human or Unpredictable

Risk no.	Risk description
EXC1	Catastrophic event such as floods, earthquakes, etc. leading to the destruction of a datacentre.
EXC2	Geopolitical/Human events leading to the destruction of a datacentre.
EXC3	Change of regulation leading to partial or total loss of trust for an actor of the provisioning delivery chain (Operator, OEM, SIM vendor...).

Table 47: Non-human or Unpredictable Risks

New Profile during Subscriber Journey

Risk no.	Risk description
EXN1	Malicious pairing of new Device using unattended Primary or Companion Device.
EXN2	Use of public Wi-Fi for internet connectivity leading to the loss of confidentiality during the provisioning of Profile operations.

Risk no.	Risk description
EXN3	Use of public Wi-Fi for internet connectivity leading to the tampering of registration information during provisioning of Profile operations.
EXN4	Social engineering leading to the communication of OTP materials to attackers.
EXN5	Man-in-the-middle or eavesdropping during Profile provisioning leading to the loss of confidentiality.
EXN6	“Implicit authentication” (e.g. HTTP MSISDN enrichment) leading to the loss of authentication or Profile material.

Table 48: New Profile during Subscriber Journey Risks

Device Swap

Risk no.	Risk description
EXS1	Malicious Subscriber using race condition scenarios leading to Profiles being activated on both Devices.
EXS2	Malicious entity using weak swap procedures in order to compromise authentication vectors.

Table 49: Device Swapping Risks

Loss of Privacy

Risk no.	Risk description
PRI1	Improper handling, transport or disclosure of the EID or any user related data information leading to the use of the latter as a “super” user tracking identifier.
PRI2	eUICC management commands leading to the creation of unexpected and unpredicted « remote paging » or « remote control » commands used by 3rd parties to spy or compromise Devices or the Subscriber themselves.

Table 50: Loss of Privacy Risks

Others

Risk no.	Risk description
EXO1	Compromising of exchanges between Profile Management actors leading to the critical loss of private keys.
EXO2	Profile cloning due to unpredicted implementation routines for specific scenarios.

Table 51: Other Risks

Creation Process

Req no.	Requirement description
CRE1	Profiles failing to be created SHALL be securely deleted or at least purged of authentication vectors.

Req no.	Requirement description
CRE2	Communication between systems participating in the Profile creation SHALL be protected in integrity and confidentiality.

Table 52: Creation Process Requirements

Annex B Profile Production Procedure (Informative)

B.1 Profile Production Procedure

This section describes a generic implementation. It should be regarded as an example only ; specific implementation MAY be required to address specific security concerns.

Within the eUICC, the current functionality of the UICC is represented by a Profile. Just as with current UICCs, Profiles are the responsibility of the Operator and Profile production is performed upon their request and permission (if not produced by the Operators themselves).

The same Operator procedures as in the current UICCs SHALL apply.

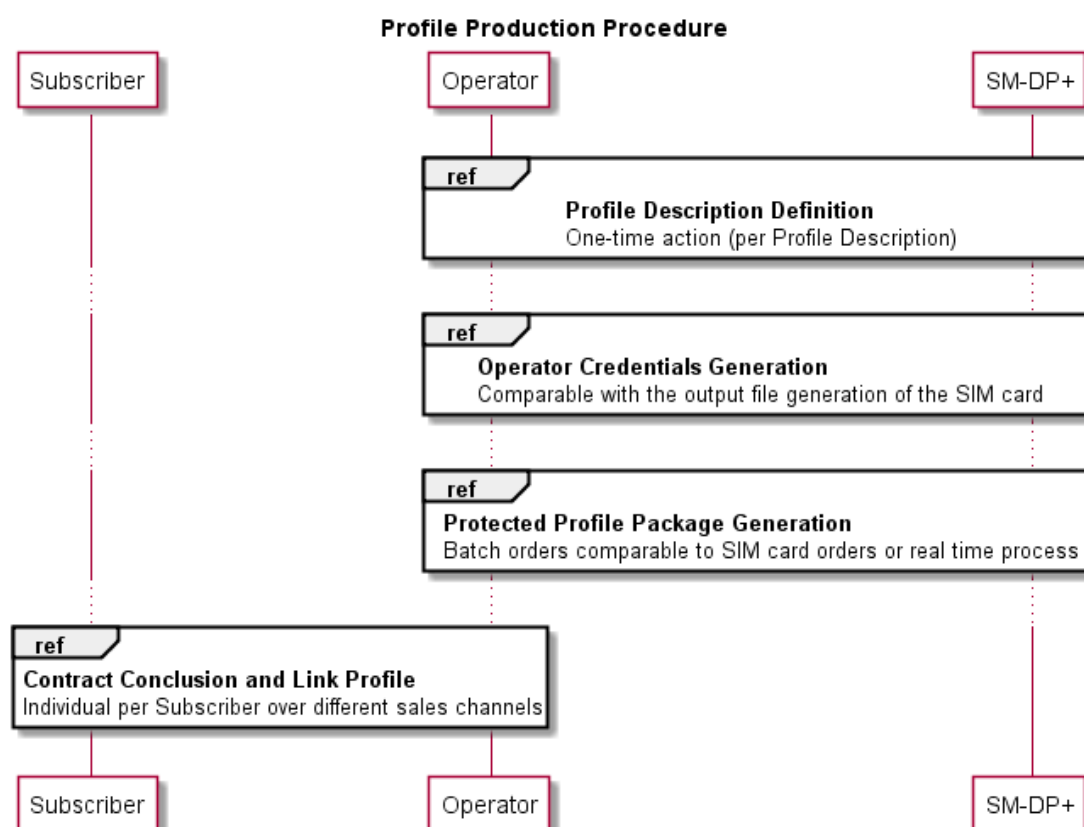


Figure 27: Profile Production Procedure

Profile Production consists of three steps:

- **Profile Description definition:** The SM-DP+ creates and registers a Profile Description based on the Operational Profile Description.
- **Operator Credentials generation:** The Operator asks the SM-DP+ to generate Operator Credentials that will be used in the next step. This procedure is **OPTIONAL** and will not be used if the Operator wants to generate the Operator Credentials during Protected Profile Package generation.
- **Protected Profile Package generation:** The Profile Packages will be created, protected and stored. This step (batch type of operation or real time process) is only performed after an order with the respective Operator.

- **Contract conclusion and Link Profile:** At the end of the contract conclusion, an Activation Code is delivered to the End User and the Profile MAY be allocated for this contract.

Note: The generation of the Bound Profile Package is part of the Profile download with Activation Code procedure in Section 5.2.2.

B.1.1 Profile Description Definition

The Profile description definition MAY comprise of the following sequence:

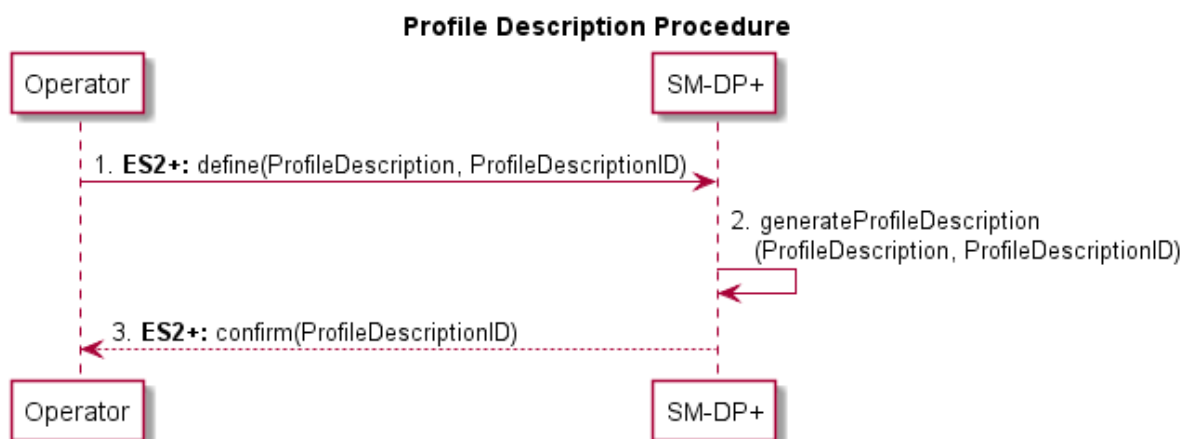


Figure 28: Profile Description Procedure

Start Condition:

- Contractual relationship between the Operator and the SM-DP+.

Procedure:

- The Operator defines its different Profile types (identified by a [non-standardised] Profile Description ID) which contains the Network Access Application like USIM, file structure, data and applications, etc.
- The SM-DP+ creates the Profile Descriptions based on the Operators input with the corresponding Profile Description ID.
- The SM-DP+ confirms the Profile Description definition e.g. by sending the corresponding Profile Description ID.

Note: An Operator can define multiple Profile Descriptions with the SM-DP+

End Condition:

- The Operator is able to order Protected Profile Packages based on Profile Description IDs.

B.1.2 Operator Credentials Generation

This procedure allows the Operator to allocate a set of Operator Credentials on the SM-DP+ without associating them to a specific ProfileDescriptionID.

Operator Credentials generation MAY comprise of the following sequence:

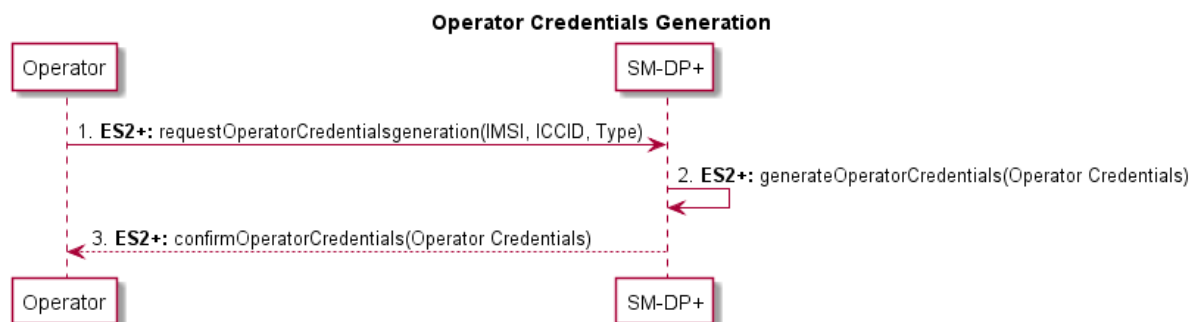


Figure 29: Operator Credentials Generation

Start Condition:

- a. IMSI, ICCID and other resources have been allocated by the Operator.

Procedure:

1. The Operator provides the IMSI, ICCID, type of credential to be created (e.g. Milenage00, TUAK 0 etc.) and other resources that MAY already be allocated to the SM-DP+. It asks the SM-DP+ to securely generate and store a set of Operator Credentials.
2. The SM-DP+ securely generates and stores a set of Operator Credentials based on the Operator's input with the corresponding IMSI, ICCID and other resources provided.
3. The SM-DP+ confirms the generation of Operator Credentials and provides them to the Operator.

B.1.3 Protected Profile Package Generation

The Protected Profile Package Generation MAY comprise of the following sequence:

This procedure MAY apply between the Profile Description definition, and the Contract conclusion and Link Profile, depending on whether the Protected Profile Package is created on demand or prepared in advance.

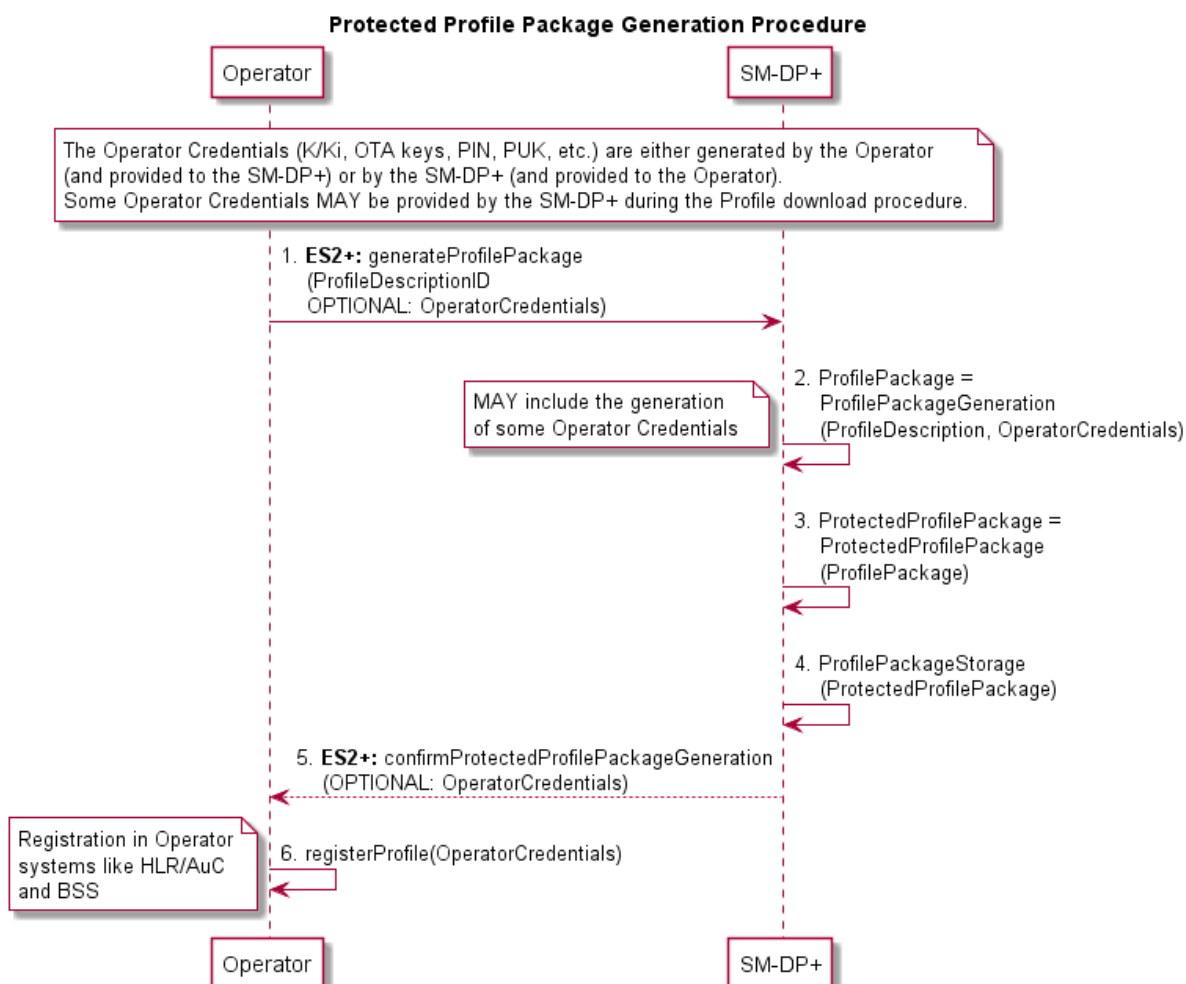


Figure 30: Protected Profile Package Generation Procedure

Start Conditions:

- a. Profile Description definition

Procedure:

1. The Operator orders the Protected Profile Package generation by providing the SM-DP+ with the Profile Description ID and some corresponding Operator input data (credentials e.g. ICCID, IMSI). The Operator input data required for Protected Profile Package generation (IMSI, ICCID, K/Ki, OTA Keys, PIN, PUK, etc.) is either created by the Operator (and provided to the SM-DP+) or by the SM-DP+ (and provided to the Operator).
2. The SM-DP+ creates the Profile Packages.
3. The SM-DP+ creates the Protected Profile Packages.
4. The SM-DP+ stores the Protected Profile Packages (securely).
5. The SM-DP+ confirms the Protected Profile Package generation, and eventually sends the additional Operator input data created by the SM-DP+.
6. The Operator registers the Operator data in the Operator systems like HLR/AuC and BSS.

End Condition:

- a. The ordered Protected Profile Packages are available at the SM-DP+. The Operator is able to activate these Subscriptions and a Profile download can be triggered upon binding to an EID.

B.1.4 Contract Conclusion and Link Profile

The Activation Code has to be provided to the End User in order to achieve the Profile download procedure. The contract conclusion and Link Profile procedure describes different scenarios to link a contract with the Activation Code process. The following options are described below:

- **Activation Code with known EID:** The EID is given by the Subscriber to the Operator during the conclusion of the contract.
- **Activation Code with unknown EID:** The EID is not given by the Subscriber to the Operator during the conclusion of the contract. The EID is only provided to the SM-DP+ during the Profile download procedure and is given back from the SM-DP+ to the Operator.
- **Activation Code with EID provided to the Operator:** The EID is not immediately given by the Subscriber during the contract conclusion, but provided in step two to the Operator.

The contract reference MAY be, but not necessarily, any Activation Code parameter (e.g. token), ICCID or the IMSI.

In any case, the SM-DP+ SHALL be able to allocate and link a Profile to the corresponding eUICC during the Profile download procedure.

B.1.4.1 Activation Code with Known EID

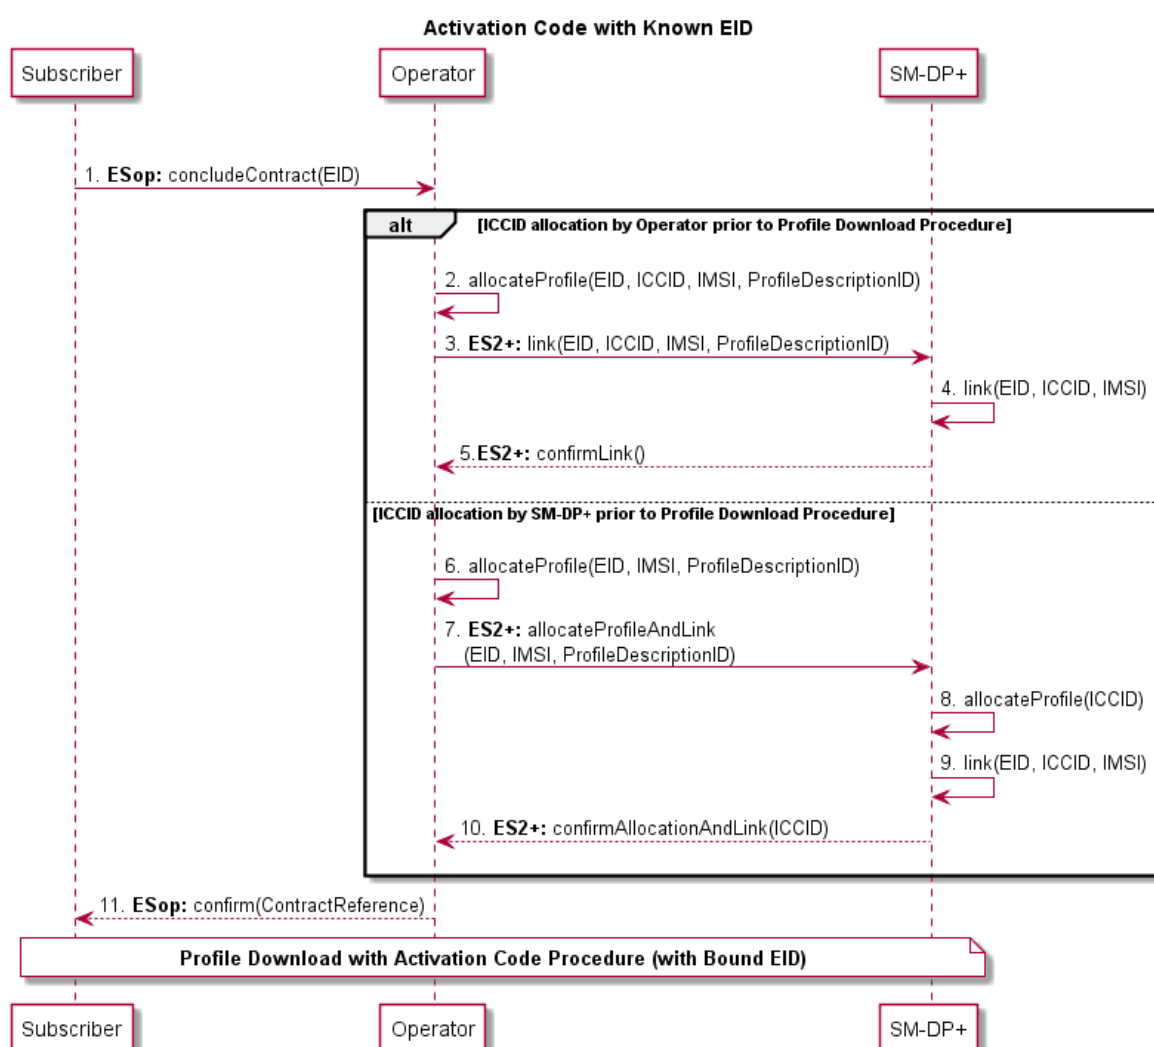


Figure 31: Activation Code with Known EID Procedure

Procedure:

Steps 1-11 in Figure 31: Contract conclusion with known EID

1. The Subscriber concludes a contract with the Operator and provides the EID during this process.
2. to 5. **Alternatively 'ICCID allocation by Operator prior to Profile download procedure'**: The Operator allocates the Profile and sends the EID, IMSI and ICCID to the SM-DP+. The SM-DP+ links the different parameters and confirms this to the Operator.
6. to 10. **Alternatively 'ICCID allocation by SM-DP+ prior to Profile download procedure'**: The Operator sends the EID, the IMSI and the Profile Description ID to the SM-DP+. The SM-DP+ allocates an ICCID to a corresponding Profile, links the different parameters and confirms the allocated ICCID and the link to the Operator.
11. The Operator confirms the contract conclusion to the Subscriber with the corresponding information (contract reference).

End Condition:

- a. The Subscriber has concluded a contract and a valid Subscription with the Operator.
- b. The SM-DP+ is informed about a future Profile download procedure request.

B.1.4.2 Activation Code with Unknown EID

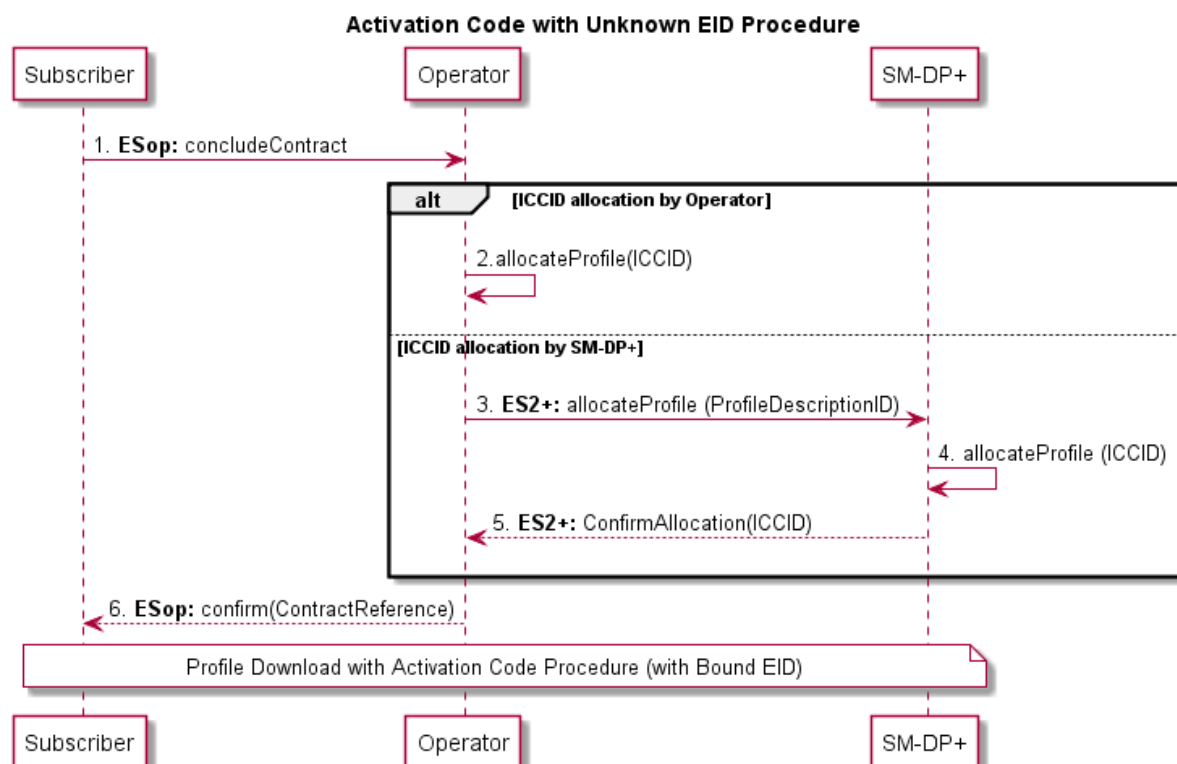


Figure 32: Activation Code with Unknown EID Procedure

Procedure:

Steps 1-6 in Figure 32: Contract conclusion without EID

1. The Subscriber concludes a contract with the Operator without knowledge of the target eUICC (EID).
2. **Alternatively 'ICCID allocation by Operator':** The Operator allocates the Profile (ICCID)
3. to 5. **Alternatively 'ICCID allocation by SM-DP+':** The Operator sends the Profile template (ID) to the SM-DP+. The SM-DP+ allocates a corresponding Profile (ICCID) and sends the allocated ICCID to the Operator.
6. The Operator confirms the contract conclusion to the Subscriber with the corresponding information (contract reference).

End Condition:

- a. The Subscriber has concluded a contract and a valid Subscription with the Operator.

- b. The SM-DP+ is informed about a future Profile download procedure request.

B.1.4.3 Activation Code with EID Provided to the Operator

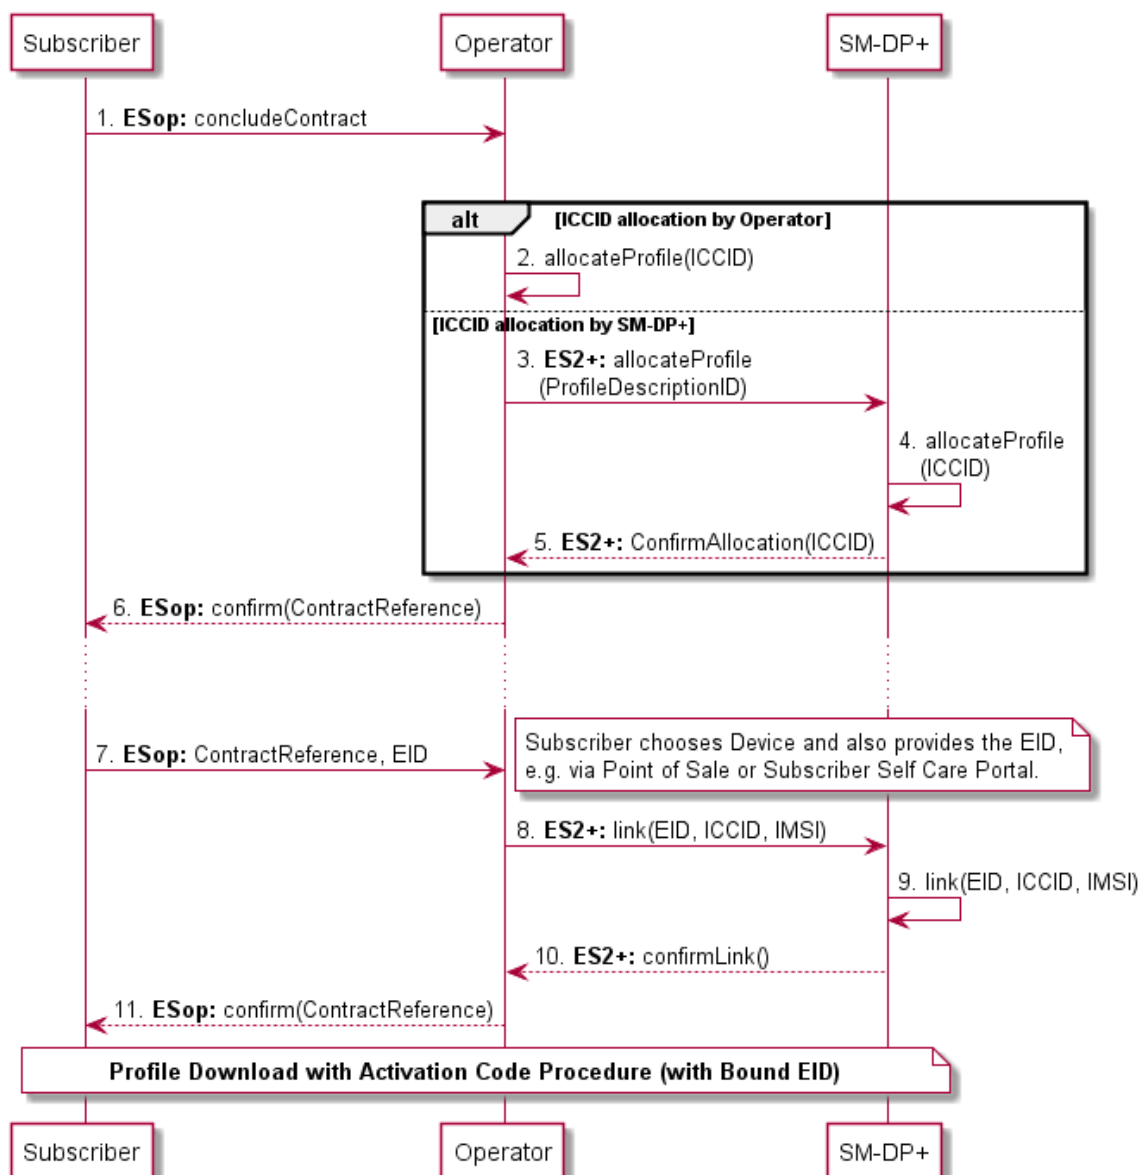


Figure 33: Activation Code with EID Provided to the Operator

Procedure:

Steps 1-11 in Figure 33 Error! Reference source not found.: **Activation Code with EID provided to the Operator**

1. The Subscriber concludes a contract with the Operator without knowledge of the target eUICC (EID).
2. **Alternatively 'ICCID allocation by Operator'**: The Operator allocates the Profile (ICCID)
3. to 5. **Alternatively 'ICCID allocation by SM-DP+'**: The Operator sends the Profile template (ID) to the SM-DP+. The SM-DP+ allocates a corresponding Profile (ICCID) and sends the allocated ICCID to the Operator.

6. The Operator confirms the contract conclusion to the Subscriber with the corresponding information (contract reference).
7. After the Subscriber has chosen the Device/eUICC, the EID is provided together with the contract reference to the Operator.
8. to 10. The Operator requests the linking of the eUICC (EID) and Profile (ICCID) by the SM-DP+. The SM-DP+ links the EID and the ICCID and confirms this to the Operator.
11. The Operator confirms the linking of the EID to the corresponding contract to the Subscriber.

End Condition:

- a. The Subscriber has concluded a contract and a valid Subscription with the Operator.
- b. The SM-DP+ is informed about a future Profile download procedure request.

This annex provides an example diagram for the implementation of Local Profile Management Operations and describes how the different confirmation levels MAY be applied.



Annex D eUICC Categories (Normative)

The following table provides eUICCs categories defined for Remote SIM Provisioning products.

Role no.	Description
CAT1	Basic eUICCs SHALL be compliant with at least the following features: <ul style="list-style-type: none">• Memory size available when no Profiles are installed (EEPROM) : 64kB• ISO interface PPS 96• BIP over HTTPS features
CAT2	Medium eUICCs SHALL be compliant with at least the following features: <ul style="list-style-type: none">• Memory size available when no Profiles are installed (EEPROM) : 384kB• ISO interface PPS 97• BIP over HTTPS features• Processor ≥ 25MHz• Crypto processor ≥ 100MHz• Memory Protection Unit
CAT3	Contactless eUICCs SHALL be compliant with at least the following features : <ul style="list-style-type: none">• Memory size available when no Profiles are installed (EEPROM) : 1024kB• ISO interface PPS 97• BIP over HTTPS features• Processor ≥ 25MHz• Crypto processor ≥ 100MHz• Memory Protection Unit

Table 53: eUICC Categories

D.1 eUICC Requirement

Req no.	Description
EUICCSHA1	The eUICC SHALL support SHA-1.

Table 54: eUICC Requirement

Annex E LPA Settings (Informative)



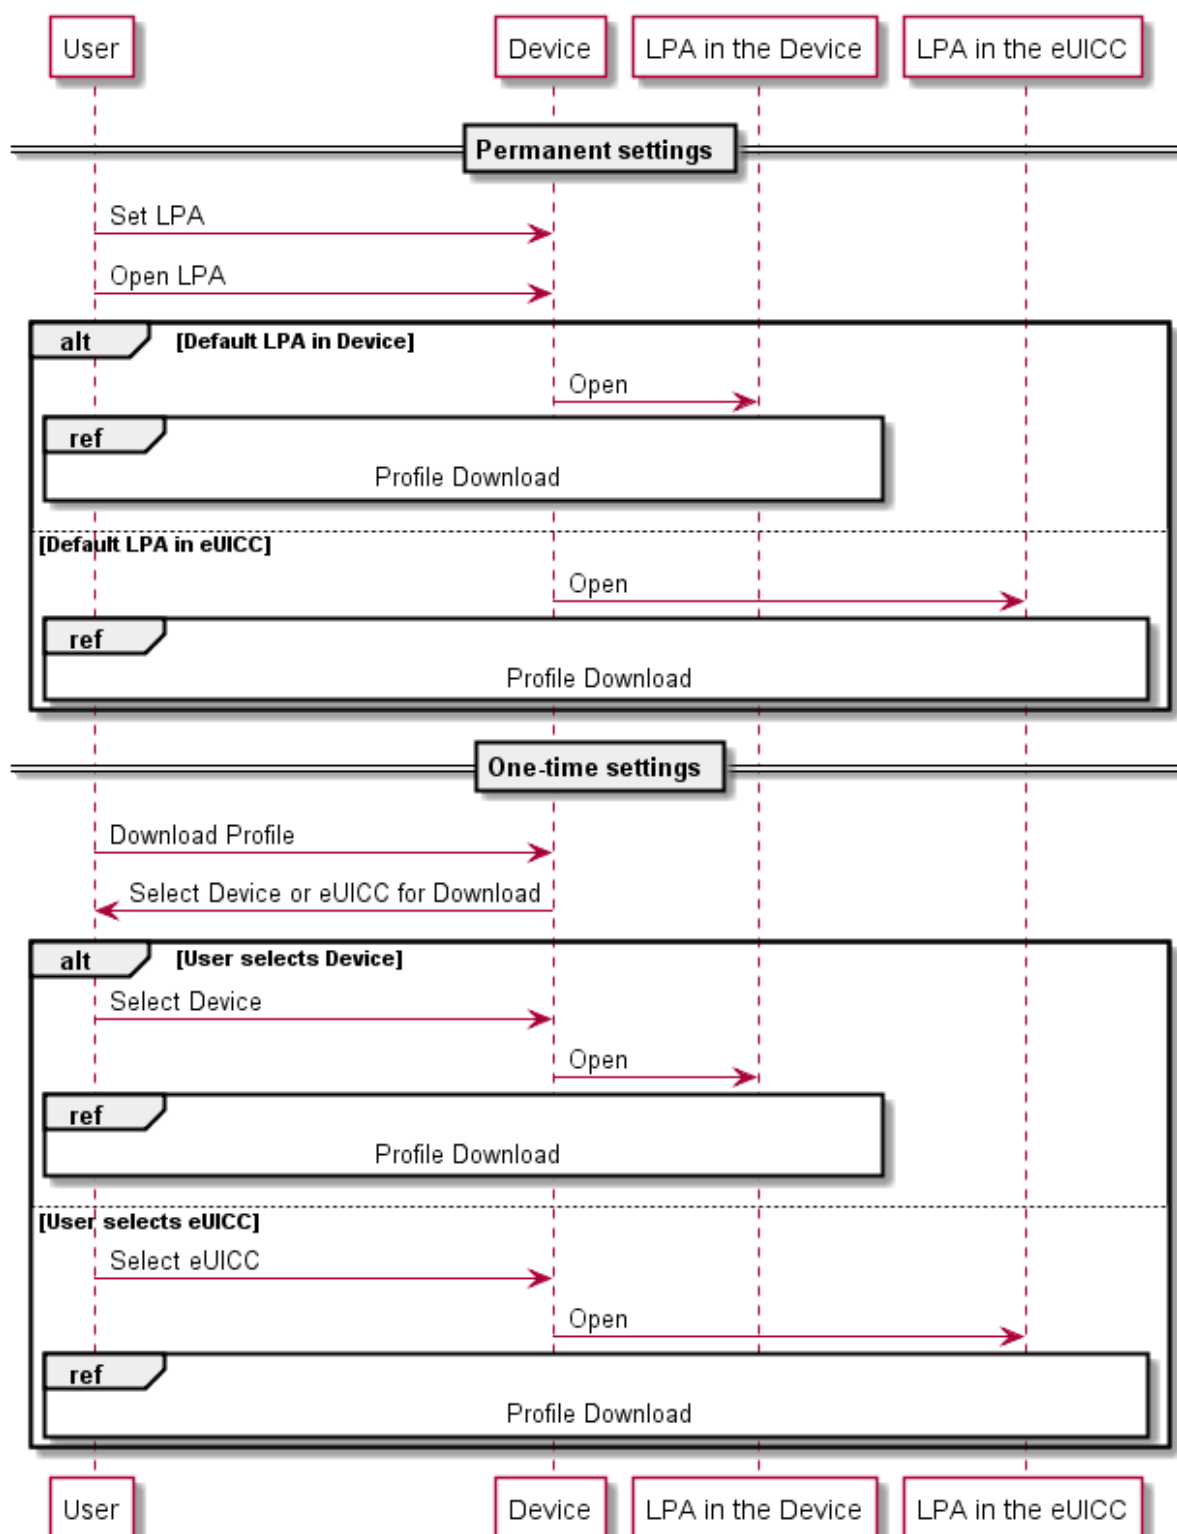


Figure 35: LPA Settings

Annex F Certifications Chain and Security Model

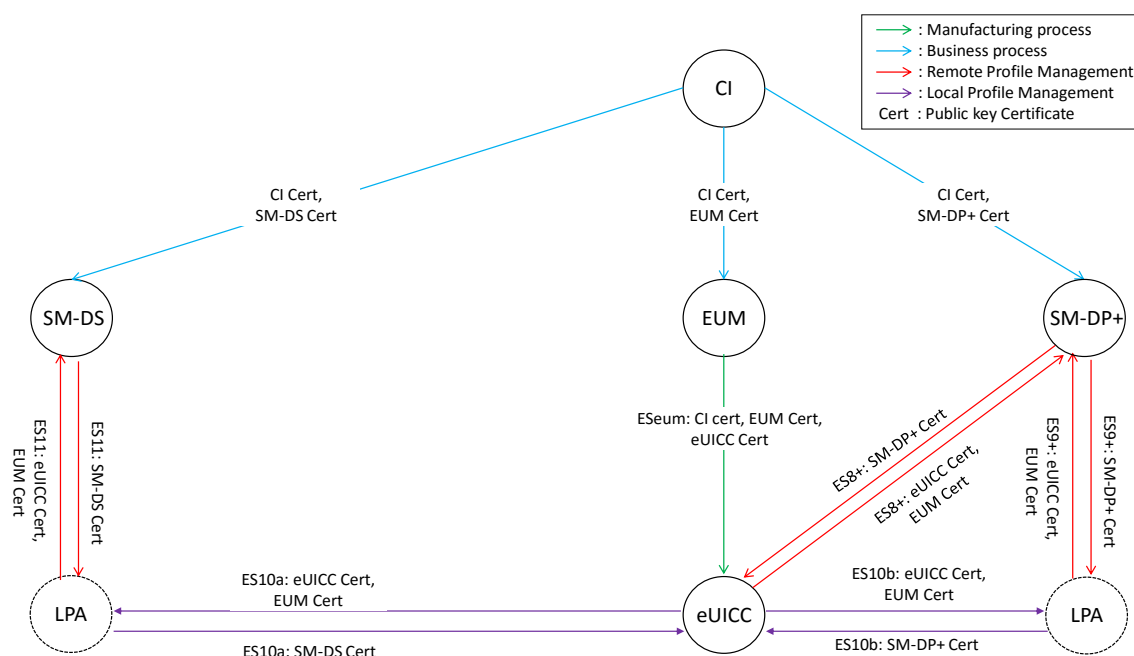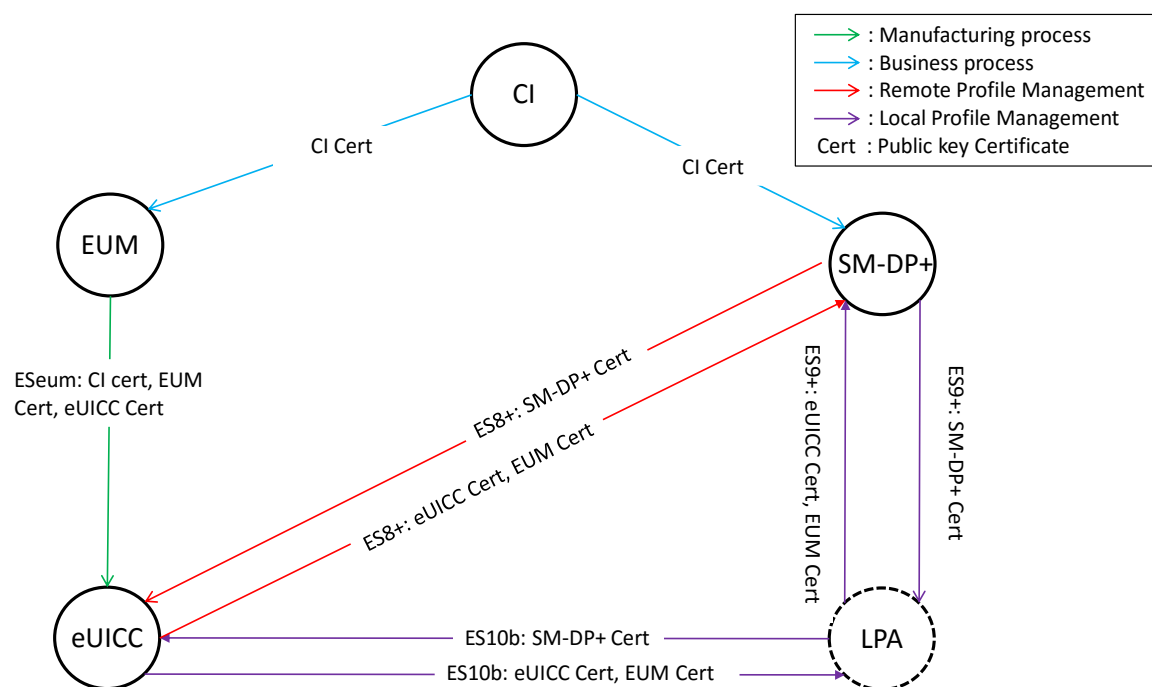

F.1 Security Model

The Security Model defines the trust relationships between all the active components of the eUICC ecosystem with an LPA in the Device.

The figure below shows only the end-to-end logical links where cryptographic keys and sensitive data are sent. The different links define the end-to-end trust relationship between entities. We distinguish a hierarchy of seven trust links with link 1 being the most significant and link 7 being the least significant.

If trust link 1 is broken, all trust links will be broken as a result. If trust link 2 is broken, trust link 1 remains intact however all other trusted links are compromised or broken.

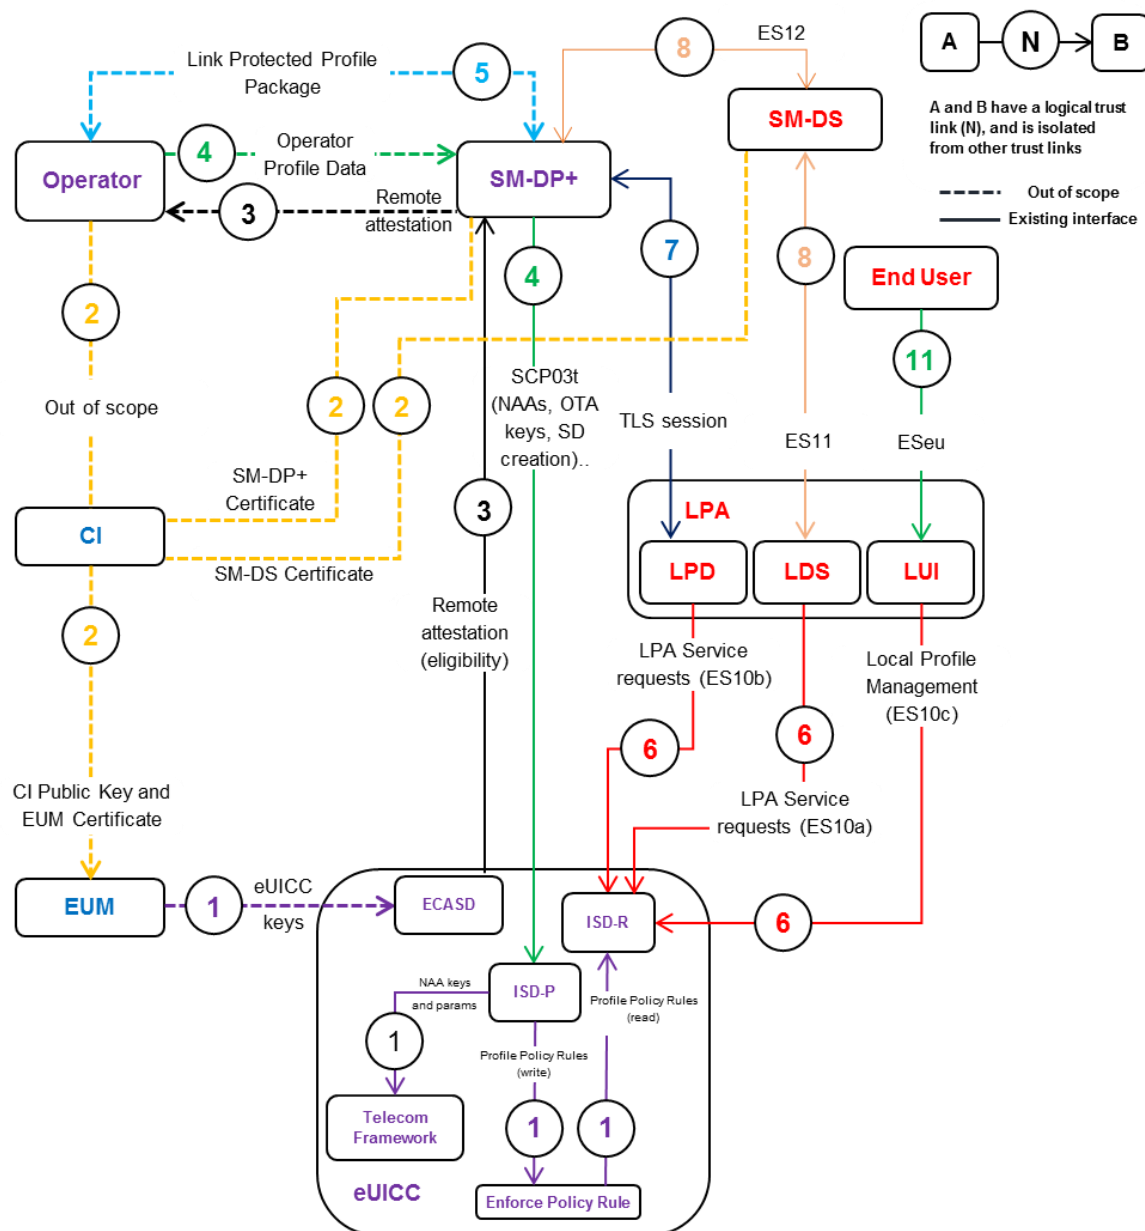


Figure 38: Trusted Link with LPA in the Device

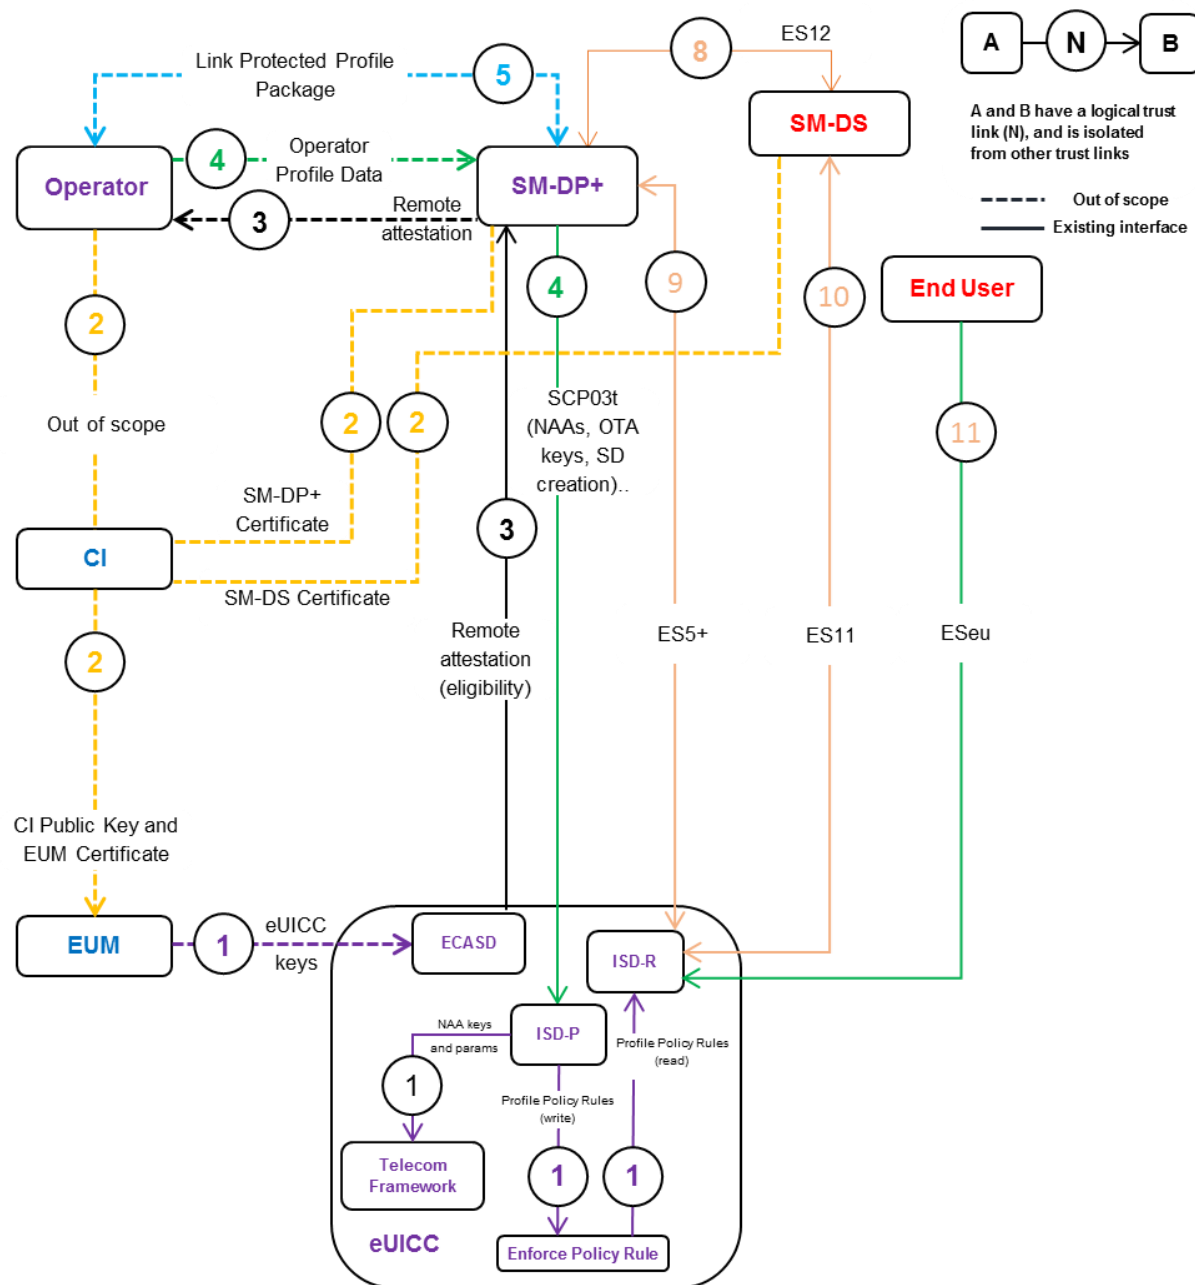


Figure 39: Trusted Link with LPA in the eUICC

Trust link	Description	Interfaces involved	Possible compromises	Impact of loss of trust link
TL1	Trust introduced onto the eUICC by the issuing EUM to enable future remote management and authorisation by the SM-DP+ and possibly the EUM: eUICC keys	Out of scope	The CI public key, the EUM's Certificate, the EUM's keyset, the eUICC keys, the OS, and the Security Domains.	The trust of the entire security model is breached and all eUICCs issued under the model cannot be trusted.

Trust link	Description	Interfaces involved	Possible compromises	Impact of loss of trust link
	(EUM & CI keyset eUICC Certificates).			
TL2	Trust placed in the CI's verification of the EUM, SM-DP+, and the resulting Certificate issuance.	Out of scope	The EUM and SM-DP+ Certificates.	Loss of Operator trust on the EUM and SM-DP+
TL3	Trust placed in the activities for eUICC eligibility and remote attestation from the ISD-R on the target eUICC to the Operator via the SM-DP+. Provides eUICC Certificate, EID, reference to its certification and EUM to the Operator and SM-DP+.	ES2+ ES8+	The eUICC Certificate or eligibility check failure.	Loss of Operator trust on the eUICC and/or SM-DP+.
TL4	Trust placed in the activities for Profile data transfer from the Operator via the SM-DP+ to the ISD-R on the target eUICC. Protects the Profile and associated credentials and keys (NAAs, OTA keys, ISD-R access, ISD-P SD creation ...) with only the Operator, SM-DP+ and the eUICC.	ES2+ ES8+	SM-DP+ Certificate eUICC Certificate or eligibility check failure.	Loss of Operator trust on the SM-DP+ and/or eUICC.
TL5	Trust placed in the information exchange between the Operator and the SM-DP+ for Link Profile requests.	ES2+	SM-DP+ Certificate	Operator loss of trust on SM-DP+.
TL6	Trust placed in the mechanisms provided by the LPA: Local Profile Management, Local Profile	ESeu	LPA security	eUICC loss of trust on LPA.

Trust link	Description	Interfaces involved	Possible compromises	Impact of loss of trust link
	Management Operations			
TL7	Trust placed in the TLS session	ES9+	LPA security or SM-DP+ security.	SM-DP+ loss of trust on LPA or LPA loss of trust on the SM-DP+.
TL8	Trust in the discovery process	ES11	LDS security or SM-DS security.	LDS loss of trust on the SM-DS and vice versa.
TL9	Trust placed on TLS session	ES5+	eUICC security or SM-DP+ security.	SM-DP+ loss of trust on the eUICC and vice versa
TL10	Trust in the discovery process	ES11	eUICC security or SM-DS security.	SM-DS loss of trust on the eUICC and vice versa.
TL11	Trust in the UI	ESeu	Device security	Loss of trust on the Device

Table 55: Trusted Link Descriptions

Compromised element	Impacted Paths	Description	Impact of loss of trust	Countermeasures
eUICC	SP1, SP3, SP4, SP9, SP10	The eUICC keys and EUM's Keyset.	The eUICC can no longer be trusted. MNO and SM-DP+ loss of trust on eUICC.	Revoke the Certificate of the eUICC.
CI	SP2	The EUM, SM-DS, and SM-DP+ Certificates.	Loss of Operator trust in the EUM, SM-DS and SM-DP+.	Repair/Replace CI. Generate new CI Certificate and new Certificate for the EUM, SM-DS and SM-DP+ following the SAS process. Remote repair of already issued eUICCs: new CI public key.
EUM	SP1, SP2	Loss of SAS certification.	Loss of trust from the Operator and SM-DP+ on the EUM and its eUICCs.	New SAS for the EUM. Remote repair of already issued eUICCs: new EUM Certificate, new eUICC Certificate.

Compromised element	Impacted Paths	Description	Impact of loss of trust	Countermeasures
SM-DP+	SP3, SP4, SP5, SP7, SP8	Loss of SAS certification.	Loss of trust from the Operator, LPA, SM-DS and eUICC on the SM-DP+.	New SAS for the SM-DP+. New SM-DP+ Certificate.
SM-DS	SP8	Loss of SAS certification.	Loss of trust from the Operator, LPA, SM-DP+ and eUICC on the SM-DS.	New SAS for the SM-DS. New SM-DS Certificate.
LPA	SP6, SP7, SP8	LPA security failure.	Loss of trust from the SM-DP+, SM-DS and eUICC on the LPA.	LPA repair by the Device Manufacturer.
Device	SP11	Device security failure	Loss of trust in the Device UI	LUI in the eUICC self-protected with User Intent capture mechanisms (i.e. Captcha Code)

Table 56: Impact of Compromising Trusted Links and Countermeasures

The signer is responsible for the revocation of the Certificates it has signed. This section describes how the new Certificates are pushed to concerned entities according to the security model.

- SM-DP+ trusts the CI
- EUM trusts the CI
- eUICC trusts the EUM and the CI

Req no.	Description
CERT1	The new SM-DP+ Public Key Certificate(s) SHALL be issued to the SM-DP+ by a GSMA CI upon achievement of the GSMA SAS or CI repair.
CERT2	The new SM-DS Public Key Certificate(s) SHALL be issued to the SM-DS by a GSMA CI upon achievement of the GSMA SAS or CI repair.
CERT3	The new EUM Certificate(s) SHALL be issued to the EUM by a GSMA CI upon achievement of the GSMA SAS or CI repair.
CERT4	The EUM Certificate(s) SHALL be loaded securely to the eUICC by the EUM Note: See details in section 4.1.1.1.
CERT5	The CI Certificate(s) SHALL be loaded securely to the eUICC by the EUM Note: See details in section 4.1.1.1.
CERT6	Certificates SHALL be revocable.
CERT7	Neither the End User nor any other party SHALL be able to prevent Certificate revocation.
CERT8	The End User SHALL not be allowed to use Remote SIM Provisioning functions with revoked Certificates.

Req no.	Description
CERT9	The Public Key Certificate of the SM-DP+ SHALL be revoked if required (e.g. loses or subsequently fails to achieve the GSMA Remote SIM Provisioning certification requirements).
CERT10	The Public Key Certificate of the SM-DS SHALL be revoked if required (e.g. loses or subsequently fails to achieve the GSMA Remote SIM Provisioning certification requirements).
CERT11	The Public Key Certificate of the EUM SHALL be revoked if required (e.g. loses or subsequently fails to achieve the GSMA Remote SIM Provisioning certification requirements).

Table 57: Certificate Requirements

Annex G LPA Integrity

The LPA must be protected against misuse or being compromised by means of implementing standard procedures.

For cases where the LPA is in the Device, the LPA integrity SHALL be guided by the following Device classes:

Device class	Description	Example of Devices
Advanced	Devices with an open operating system where mechanisms such as secure boot and platform signing of applications are available and used to protect the LPA.	Smartphones, Tablets, Laptops, Advanced Wearables
Basic	Devices without possibility to install applications. The attack surface of the LPA is minimal due to the locked down nature of these Devices. Simple mechanisms to ensure that the LPA is not compromised SHALL be taken.	Connected sensors, Simple Wearables, Single use case devices

Table 58: Device Classes

Annex H Rules Authorisation Table (Normative)

Annex H reflects the RAT table configuration(s) that SHALL be configured in embedded UICC.

Legend: The following colours apply

Line color
Mandatory to be included
Optional

The following RAT SHALL apply to all products

PR	Operators	User consent
POL RULE1	*	YES
POL RULE2	*	YES

Mandatory part
of the RAT table

Table 59: RAT configuration

Additional lines can be added to the RAT table to reflect agreement between some Operators and OEMs as needed. The OEM can also decide to add lines to the RAT table.

PR	Operators	User consent
POL RULE 1	Operator1	NO
POL RULE1	*	YES
POL RULE2	*	YES

Mandatory part
of the RAT table

Table 60: RAT configuration

Note: POL RULE3 is defined for use in specific use cases that have not yet been fully defined and is not applicable for this version of the specification.

Annex I Document Management

I.1 Document History

Version	Date	Brief Description of Change	Approval Authority	Editor / Company
V1.0	03/12/15	First Release with amendments from Security review.	PSMC	Carmen Kwok, GSMA
V2.0	15/07/16	Includes Phase 2 content	PSMC	Carmen Kwok, GSMA

Other Information

Type	Description
Document Owner	Carmen Kwok
Editor / Company	GSMA

It is our intention to provide a quality product for your use. If you find any errors or omissions, please contact us with your comments. You may notify us at prd@gsma.com

Your comments or suggestions & questions are always welcome.